



Features

- Input Frequency Range 2.7 GHz to 3.0 GHz
- P_{OUT} Typically 12 dBm at 5.8 GHz
- P_{IN} Typically 0 dBm
- V_{CC} 3.0V to 3.9V
- CW Mode Operation
- Package: QFN16

Benefits

- Ramping Control Extends Battery Lifetime
- AC Input Coupling Saves External Capacitors
- Extremely Low BOM for Application

Electrostatic sensitive device.
Observe precautions for handling.



1. Description

The 5.8-GHz frequency doubler IC is designed with Atmel's Silicon-Germanium (SiGe) process and provides a high conversion gain.

The device consists of a doubler stage, a filter and a driver amplifier with an output power of 11 dBm. The output stage was realized using an open-collector structure. Power-up/down and output levels are controlled via the bias control pin 6 and pin 7 (V_{CTL}).

**2.9 GHz to
5.8 GHz SiGe
Frequency
Doubler IC**


ATR7039

Preliminary

Rev. 4786E–DECT–10/05



Figure 1-1. Block Diagram

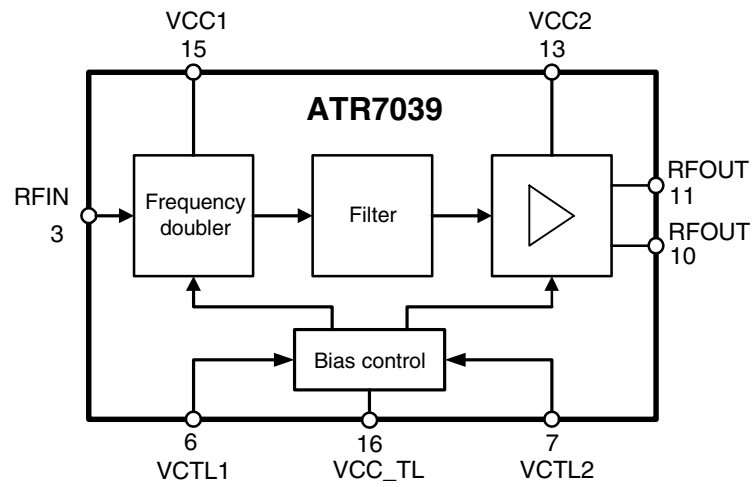

2. Pin Configuration

Figure 2-1. Pinning QFN16

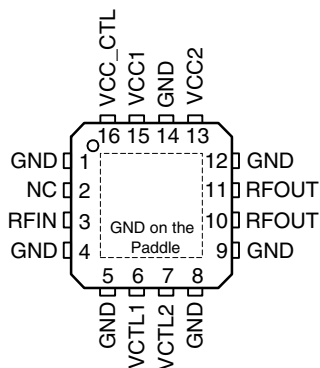


Table 2-1. Pin Description

Pin	Symbol	Function
1	GND	Ground
2	NC	Not connected
3	RFIN	RF input
4	GND	Ground
5	GND	Ground
6	VCTL1	Power-up/biasing control voltage to frequency doubler stage
7	VCTL2	Power-up/biasing control voltage to output amplifier stage
8	GND	Ground
9	GND	Ground
10	RFOUT	RF output
11	RFOUT	RF output
12	GND	Ground
13	VCC2	Supply voltage for output amplifier stage
14	GND	Ground
15	VCC1	Supply voltage for frequency doubler stage
16	VCC_CTL	Supply voltage for biasing control
Paddle	—	Ground

3. Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameters	Symbol	Value	Unit
Supply voltage, no RF	V_{CC}	5	V
Supply current	I_{CC}	400	mA
Junction temperature	T_J	150	°C
Storage temperature	T_{Stg}	–40 to +125	°C
Input RF power	P_{IN}	13	dBm
Control voltage	$V_{CTL1,2}$	2.5	V

Note: The part may not survive all parameters at maximum applied simultaneously!

4. Thermal Resistance

Parameters	Symbol	Value	Unit
Junction ambient QFN16 package, slug soldered on PCB	R_{thJA}	40	K/W

5. Operating Range


Parameters	Symbol	Value	Unit
Supply voltage	V_{CC}	3.0 to 3.9	V
Input frequency range	f_{in}	2700 to 3000	MHz
Output frequency range	f_{out}	5400 to 6000	MHz
Ambient temperature range	T_{amb}	–25 to +75	°C

6. Electrical Characteristics

No.	Parameters	Test Conditions	Pin	Symbol	Min.	Typ.	Max.	Unit	Type*
1.0	Input power		3	P _{in}		0	10	dBm	A
1.1	Output power	Measured at harmonic frequency 2f	10, 11	P _{2f}		12		dBm	A
1.2		Measured at harmonic frequency 3f	10, 11	P _{3f}		-8		dBm	A
1.3		Measured at fundamental frequency	10, 11	P _{1f}		TBD		dBm	A
1.4	Output power deviation	Measured at harmonic frequency	10, 11	P _d	-2		+2	dB	A
1.5	Control voltage range	Doubler operating mode	6	V _{CTL1}		1.4		V	A
			7	V _{CTL2}		1.7		V	A
1.6		Power down mode	6, 7	V _{CTL1,2}			0.2	V	A
1.7	Input and output return loss	With external matching	3, 10, 11			-12	-8	dB	C
1.8	Reverse isolation	2f	3, 10, 11	ISO _r	30	36		dB	C
1.9	Current consumption	for 12dBm output power	13, 15, 16	I _{CC}		90		mA	A
1.10	Current consumption in power down mode	V _{CTL1,2} ≤ 0.2V	13, 15, 16	I _{CC}		15		μA	A
2.0	Duty cycle						100	%	C

*) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter

7. Application Circuit

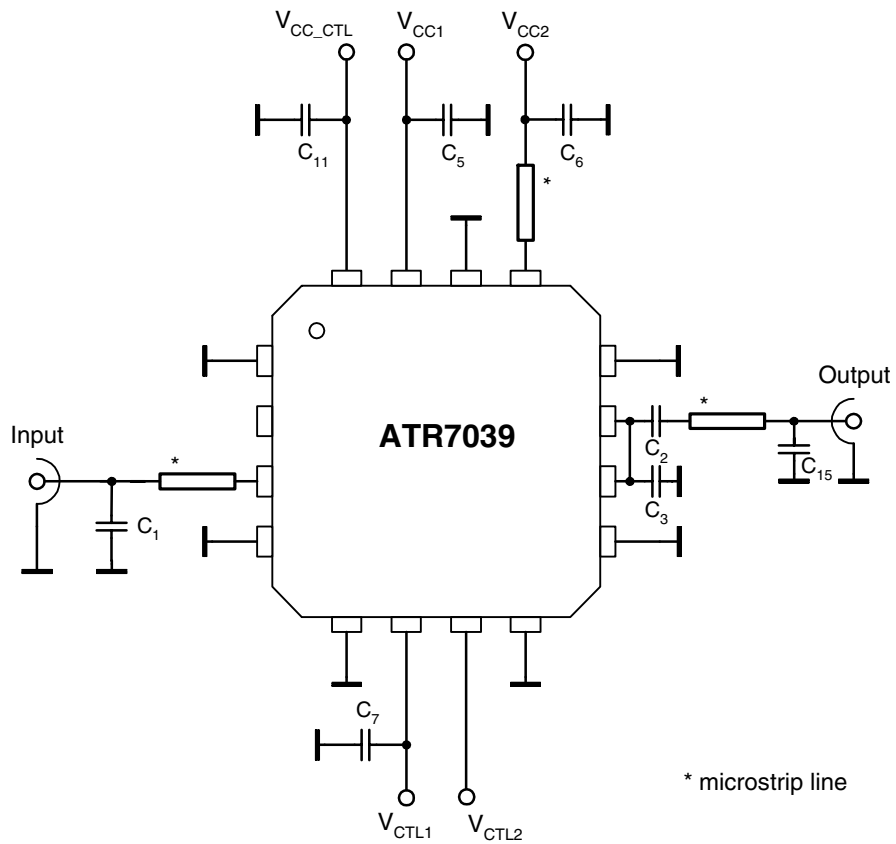


8. Ordering Information

Extended Type Number	Package	Remarks
ATR7039-PESG	QFN16 - 4x4	Tube, MOQ 750, Pb-free
ATR7039-PEQG	QFN16 - 4x4	Taped and reeled, MOQ 6000, Pb-free

9. Package Information

Package: QFN 16 - 4x4
Exposed pad 2.1x2.1
(acc. JEDEC OUTLINE No. MO-220)
Dimensions in mm

Not indicated tolerances ± 0.05

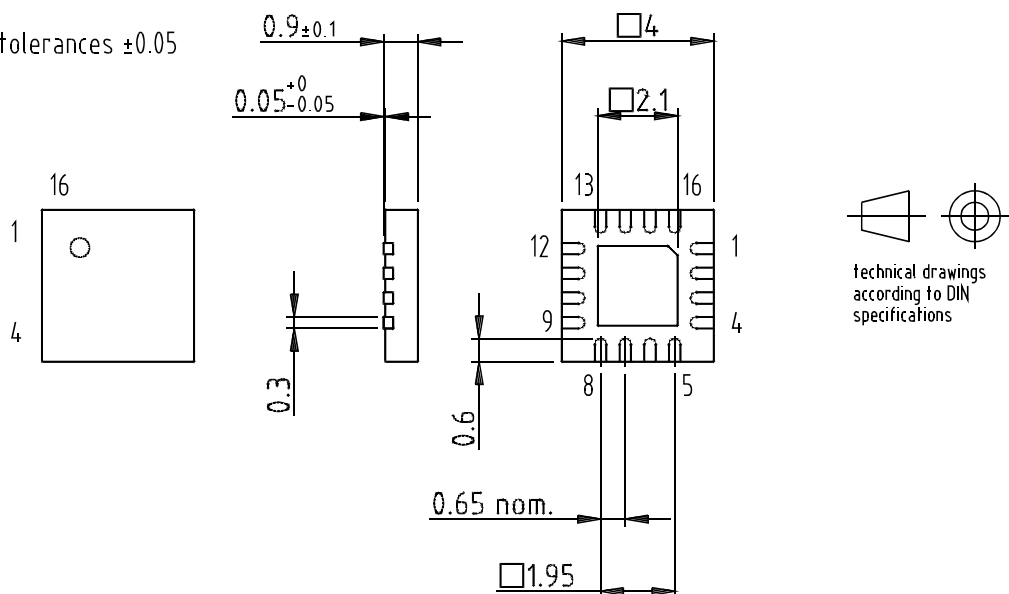

Drawing-No.: 6.543-5090.01-4

Issue: 2; 24.01.03



Atmel Corporation

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl
Route des Arsenaux 41
Case Postale 80
CH-1705 Fribourg
Switzerland
Tel: (41) 26-426-5555
Fax: (41) 26-426-5500

Asia

Room 1219
Chinachem Golden Plaza
77 Mody Road Tsimshatsui
East Kowloon
Hong Kong
Tel: (852) 2721-9778
Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
Tel: (81) 3-3523-3551
Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

La Chantrerie
BP 70602
44306 Nantes Cedex 3, France
Tel: (33) 2-40-18-18-18
Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle
13106 Rousset Cedex, France
Tel: (33) 4-42-53-60-00
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park
Maxwell Building
East Kilbride G75 0QR, Scotland
Tel: (44) 1355-803-000
Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
Postfach 3535
74025 Heilbronn, Germany
Tel: (49) 71-31-67-0
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

*Biometrics/Imaging/Hi-Rel MPU/
High Speed Converters/RF Datacom*
Avenue de Rochepleine
BP 123
38521 Saint-Egreve Cedex, France
Tel: (33) 4-76-58-30-00
Fax: (33) 4-76-58-34-80

Literature Requests

www.atmel.com/literature

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© Atmel Corporation 2005. All rights reserved. Atmel®, logo and combinations thereof, Everywhere You Are® and others, are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.



Printed on recycled paper.