

# "High Frequency Ceramic Solutions"

## 2.45 GHz Antenna

P/N 2450AT42A100

Detail Specification: 08/29/2008

Page 1 of 3

### General Specifications


Part Number	2450AT42A100
Frequency Range	2400 - 2500 Mhz
Peak Gain	0 dBi typ. (XZ-V)
Average Gain	-1 dBi typ. (XZ-V)
Return Loss	9.5 dB min.

Input Power	3 Watts max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quantity	2,000

No.	Function	Terminal Configuration
1	Feeding Point	
2	NC	

### Mechanical Dimensions


	In	mm
L	0.197 ± 0.008	5.00 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.043 ± 0.008	1.10 ± 0.20
a	0.020 ± 0.012	0.50 ± 0.30

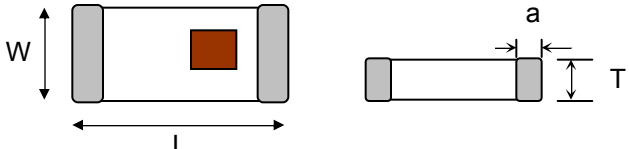

### Mounting Considerations

Mount these devices with brown mark facing up. Units: mm

\*Line width should be designed to provide 50Ω impedance matching characteristics.

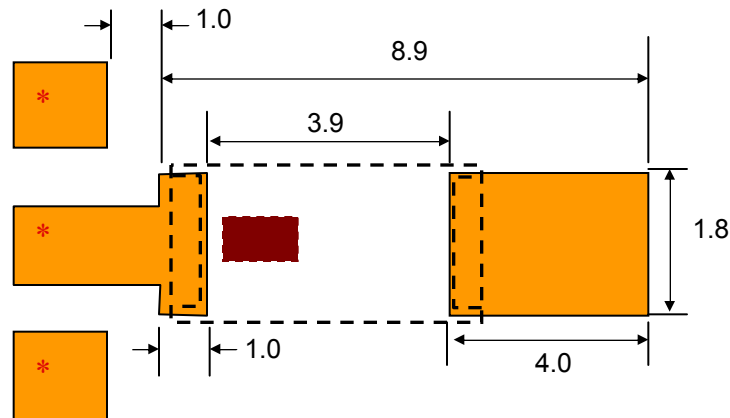

Units:mm

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.

# "High Frequency Ceramic Solutions"


## 2.45 GHz Antenna

P/N 2450AT42A100

Detail Specification: 08/29/2008

Page 2 of 3

### Typical Electrical Characteristics (T=25°C)

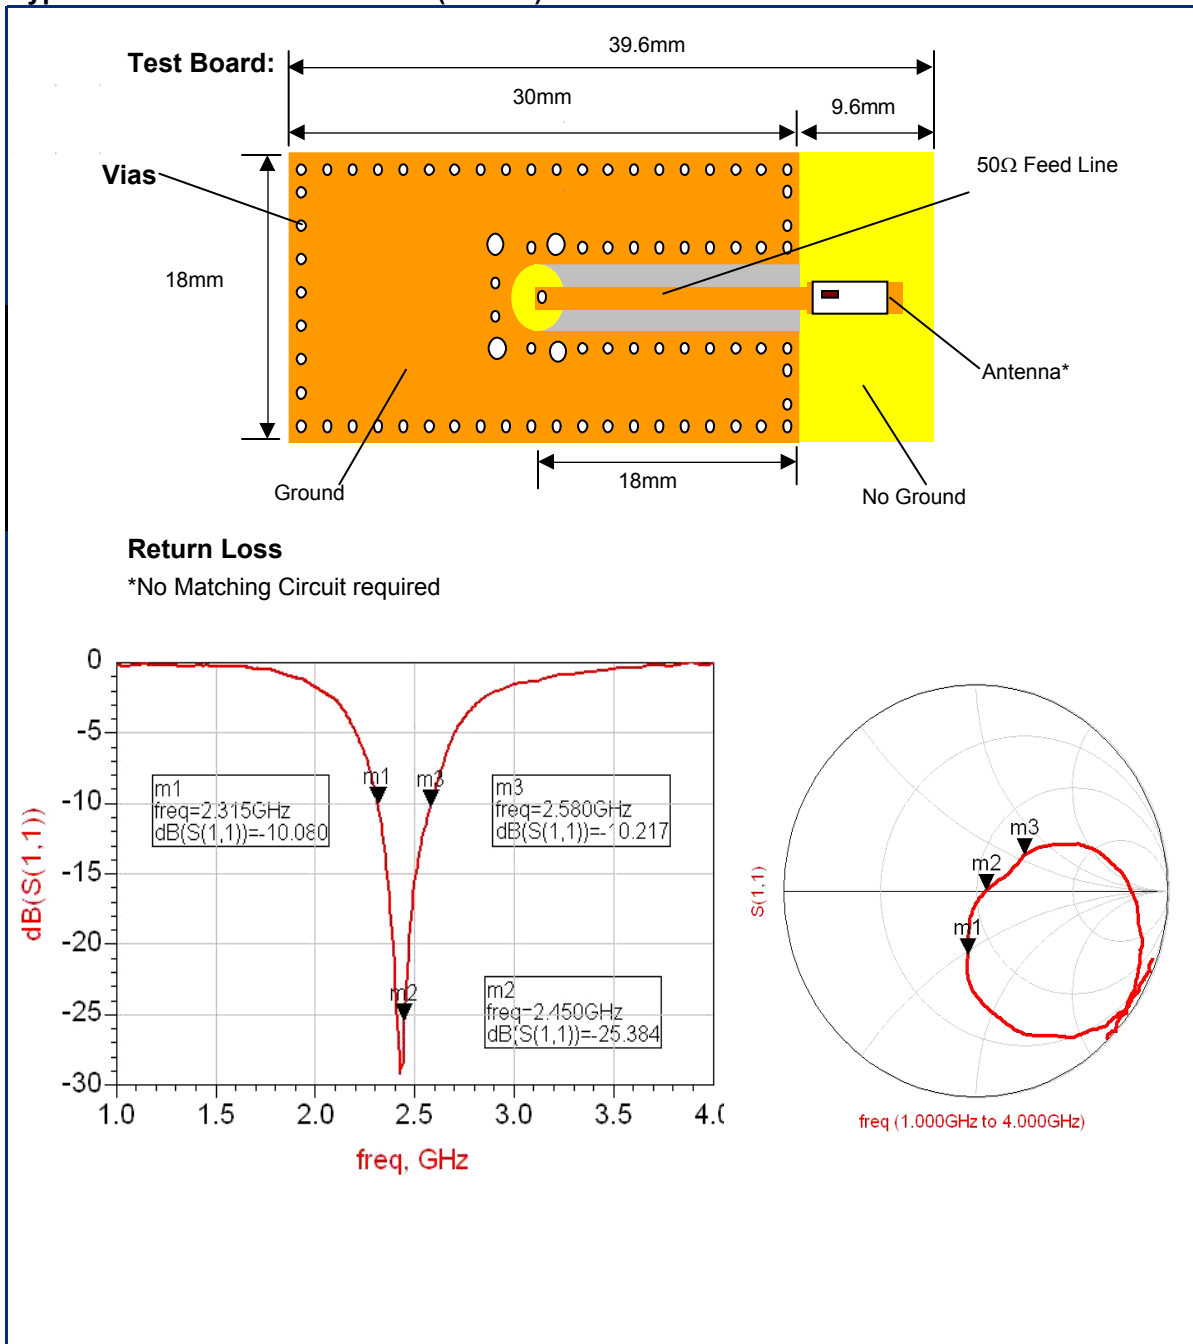

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

# "High Frequency Ceramic Solutions"


**2.45 GHz Antenna**

**P/N 2450AT42A100**

Detail Specification: 08/29/2008

Page 2 of 3

## Typical Radiation Patterns

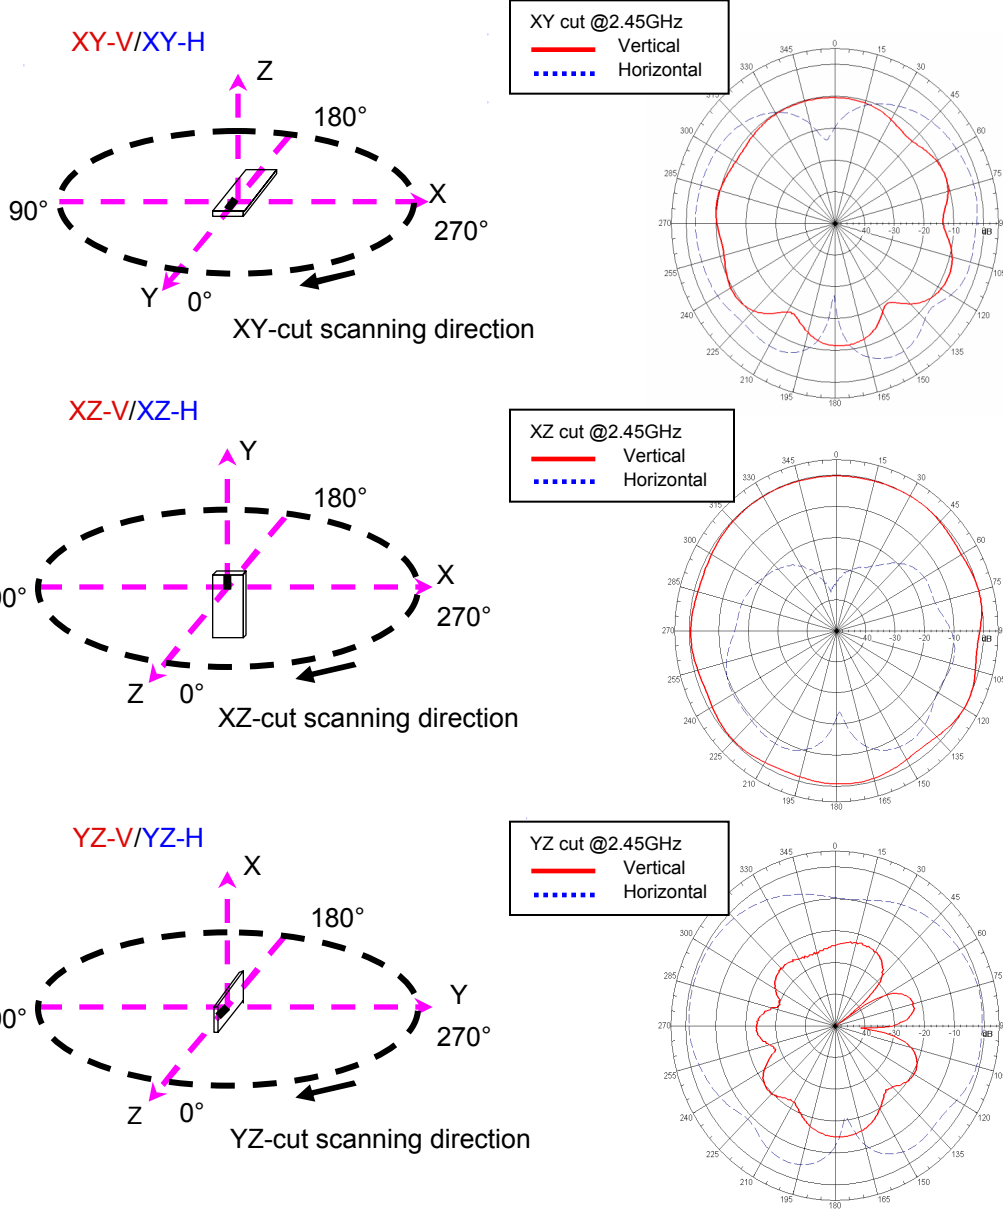

Johanson Technology, Inc. reserves the right to make design changes without notice.  
 All sales are subject to Johanson Technology, Inc. terms and conditions.

