

LMX2324A

LMX2324A PLLatinum 2.2 GHz Frequency Synthesizer for RF Personal Communications (SL163188)



Literature Number: SNAS049B

PLLatinum™ 2.2 GHz Frequency Synthesizer for RF Personal Communications (SL163188)

General Description

The LMX2324A is a high performance frequency synthesizer with integrated 32/33 dual modulus prescaler designed for RF operation up to 2.2 GHz. Using a proprietary digital phase locked loop technique, the LMX2324A's linear phase detector characteristics can generate very stable, low noise control signals for UHF and VHF voltage controlled oscillators.

Serial data is transferred into the LMX2324A via a three-line MICROWIRE™ interface (Data, LE, Clock). Supply voltage range is from 2.7V to 5.5V. The LMX2324A features very low current consumption, typically 3.5 mA at 3V. The charge pump provides 4 mA output current.

The LMX2324A is manufactured using National's ABIC V BiCMOS process and is packaged in a 16-pin TSSOP and a 16-pin Chip Scale Package (CSP).


Features

- RF operation up to 2.2 GHz
- 2.7V to 5.5V operation
- Low current consumption: $I_{CC} = 3.5$ mA (typ) at $V_{CC} = 3.0$ V
- Dual modulus prescaler: 32/33
- Internal balanced, low leakage charge pump

Applications


- Cellular telephone systems (GSM, NADC, CDMA, PDC)
- Personal wireless communications (DCS-1800, DECT, CT-1+)
- Wireless local area networks (WLANs)
- Other wireless communication systems

Functional Block Diagram

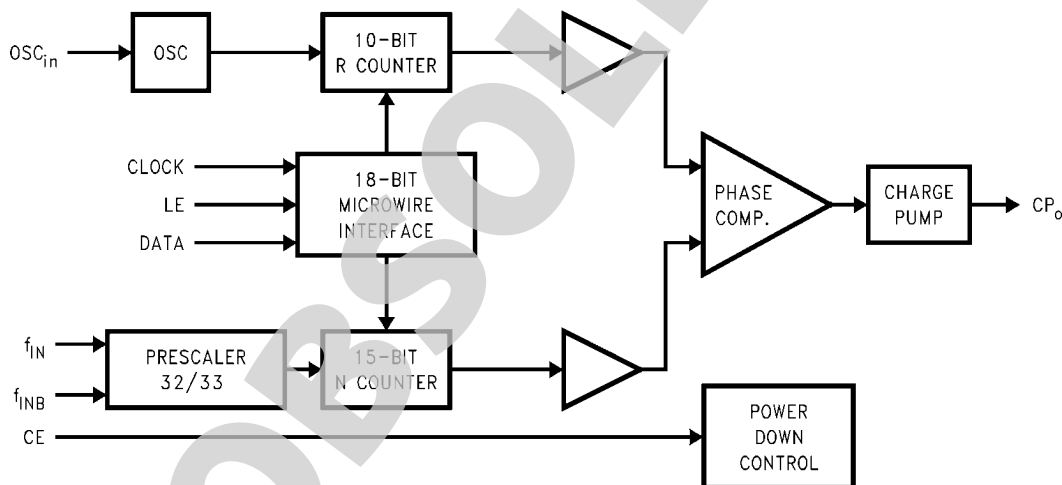

10124601

Connection Diagram

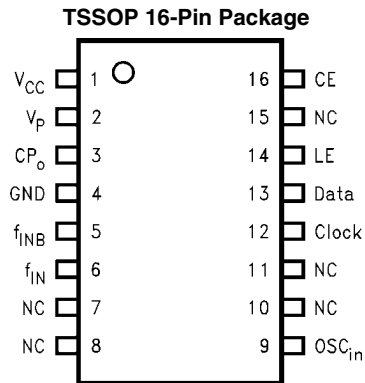

Order Number **LM2324ATMX**
See NS Package Number **MTC16**

Pin Descriptions

| Pin No. | | Pin Name | I/O | Description |
|---------|-------|------------|-----|--|
| TSSOP16 | CSP16 | | | |
| 2 | 1 | V_P | — | Power supply for charge pump. Must be $\geq V_{CC}$ |
| 3 | 2 | CP_o | O | Internal charge pump output. For connection to a loop filter for driving the voltage control input of an external oscillator. |
| 4 | 3 | GND | — | Ground. |
| 5 | 4 | f_{INB} | I | RF prescaler complimentary input. In single-ended mode, a bypass capacitor should be placed as close as possible to this pin and be connected directly to the ground plane. The LMX2324 can be driven differentially when the bypass capacitor is omitted. |
| 6 | 5 | f_{IN} | I | RF prescaler input. Small signal input from the voltage controlled oscillator. |
| 7 | 6 | NC | | No Connect |
| 8 | 7 | NC | | No Connect |
| 9 | 8 | OSC_{in} | I | Oscillator input. A CMOS inverting gate input. The input has a $V_{CC}/2$ input threshold and can be driven from an external CMOS or TTL logic gate. |
| 10 | 9 | NC | | No Connect |
| 12 | 10 | Clock | I | High impedance CMOS Clock input. Data is clocked in on the rising edge, into the various counters and registers. |
| 13 | 11 | Data | I | Binary serial data input. Data entered MSB first. LSB is control bit. High impedance CMOS input. |
| 14 | 12 | LE | I | Load Enable input. When Load Enable transitions HIGH, data is loaded into either the N or R register (control bit dependent). See timing diagram. |
| 15 | 13 | NC | | No Connect |
| 11 | 14 | NC | | No Connect |
| 16 | 15 | CE | I | CHIP Enable. A LOW on CE powers down the device asynchronously and will TRI-STATE® the charge pump output. |
| 1 | 16 | V_{CC} | I | Power supply voltage input. Input may range from 2.7V to 5.5V. Bypass capacitors should be placed as close as possible to this pin and be connected directly to the ground plane. |

Absolute Maximum Ratings *(Note 1)*

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|---|--------------------------|
| Power Supply Voltage (V_{CC}) | -0.3V to 6.5V |
| Power Supply for Charge Pump (V_P) | V_{CC} to 6.5V |
| Voltage on Any Pin with GND = 0V (V_I) | -0.3V to $V_{CC} + 0.3V$ |
| Storage Temperature Range (T_S) | -65°C to +150°C |
| Lead Temperature (solder, 4 sec.) (T_L) | +260°C |
| ESD - Whole Body Model <i>(Note 2)</i> | 2 kV |

Recommended Operating Conditions *(Note 1)*

| | |
|--|------------------|
| Power Supply Voltage (V_{CC}) | 2.7V to 5.5V |
| Power Supply for Charge Pump (V_P) | V_{CC} to 5.5V |
| Operating Temperature (T_A) | -40°C to +85°C |

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Recommended Operating Conditions indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics.

Note 2: This device is a high performance RF integrated circuit and is ESD sensitive. Handling and assembly of this device should be done on ESD protected workstations.


Electrical Characteristics $(V_{CC} = 5V, V_P = 3V; 0^\circ C < T_A < 70^\circ C$ except as specified).

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|--|--|---|--------------|------|--------------|----------|
| GENERAL | | | | | | |
| I_{CC} | Power Supply Current | | | 3.5 | 25 | mA |
| $I_{CC-PWDN}$ | Power Down Current | | | 10 | | μA |
| f_{IN} | f_{IN} Operating Frequency | | 0.8 | | 2.2 | GHz |
| OSC_{in} | Oscillator Operating Frequency | | 5 | | 20 | MHz |
| f_{PD} | Phase Detector Frequency | | | | 10 | MHz |
| Pf_{IN} | Input Sensitivity f_{INB} grounded through a 10 pF capacitor | | -12 | | -3 | dBm |
| V_{OSC} | Oscillator Sensitivity | | 0.4 | 1.0 | $V_{CC}-0.3$ | V_{PP} |
| CHARGE PUMP | | | | | | |
| $ICP_{o-source}$ | Charge Pump Output Current | $VCP_o = V_P/2$ | | -4.0 | | mA |
| ICP_{o-sink} | | | | 4.0 | | mA |
| ICP_{o-Tri} | Charge Pump TRI-STATE Current | $0.5 \leq VCP_o \leq V_P - 0.5$ $T = 25^\circ C$ | -5 | 0.1 | 5 | nA |
| ICP_o vs. VCP_o | Charge Pump Output Current Variation vs. Voltage <i>(Note 4)</i> | $0.5 \leq VCP_o \leq V_P - 0.5$ $T = 25^\circ C$ | | 10 | | % |
| ICP_{o-sink} vs. $ICP_{o-source}$ | Charge Pump Output Current Sink vs. Source Mismatch <i>(Note 4)</i> | $VCP_o = V_P/2$ $T = 25^\circ C$ | | 5 | | % |
| ICP_o vs. T | Charge Pump Output Current Magnitude Variation vs. Temperature <i>(Note 4)</i> | $VCP_o = V_P/2$ | | 10 | | % |
| DIGITAL INTERFACE (DATA, CLK, LE, CE) | | | | | | |
| V_{IH} | High-Level Input Voltage | <i>(Note 3)</i> | 0.8 V_{CC} | | | V |
| V_{IL} | Low-Level Input Voltage | <i>(Note 3)</i> | | | 0.2 V_{CC} | V |
| I_{IH} | High-Level Input Current | $V_{IH} = V_{CC} = 5.5V$ | -1.0 | | 1.0 | μA |
| I_{IL} | Low-Level Input Current | $V_{IL} = 0, V_{CC} = 5.5V$ | -1.0 | | 1.0 | μA |
| I_{IH} | Oscillator Input Current | $V_{IH} = V_{CC} = 5.5V$ | | | 100 | μA |
| I_{IL} | | $V_{IL} = 0, V_{CC} = 5.5V$ | -100 | | | μA |
| MICROWIRE TIMING | | | | | | |
| t_{CS} | Data to Clock Set Up Time | See Data Input Timing | 50 | | | ns |
| t_{CH} | Data to Clock Hold Time | See Data Input Timing | 10 | | | ns |
| t_{CWH} | Clock Pulse Width High | See Data Input Timing | 50 | | | ns |
| t_{CWL} | Clock Pulse Width Low | See Data Input Timing | 50 | | | ns |
| t_{ES} | Clock to Enable Set Up Time | See Data Input Timing | 50 | | | ns |
| t_{EW} | Enable Pulse Width | See Data Input Timing | 50 | | | ns |

Note 3: Except f_{IN} and OSC_{in}

Note 4: See related equations in charge pump current specification definitions

Charge Pump Current Specification Definitions

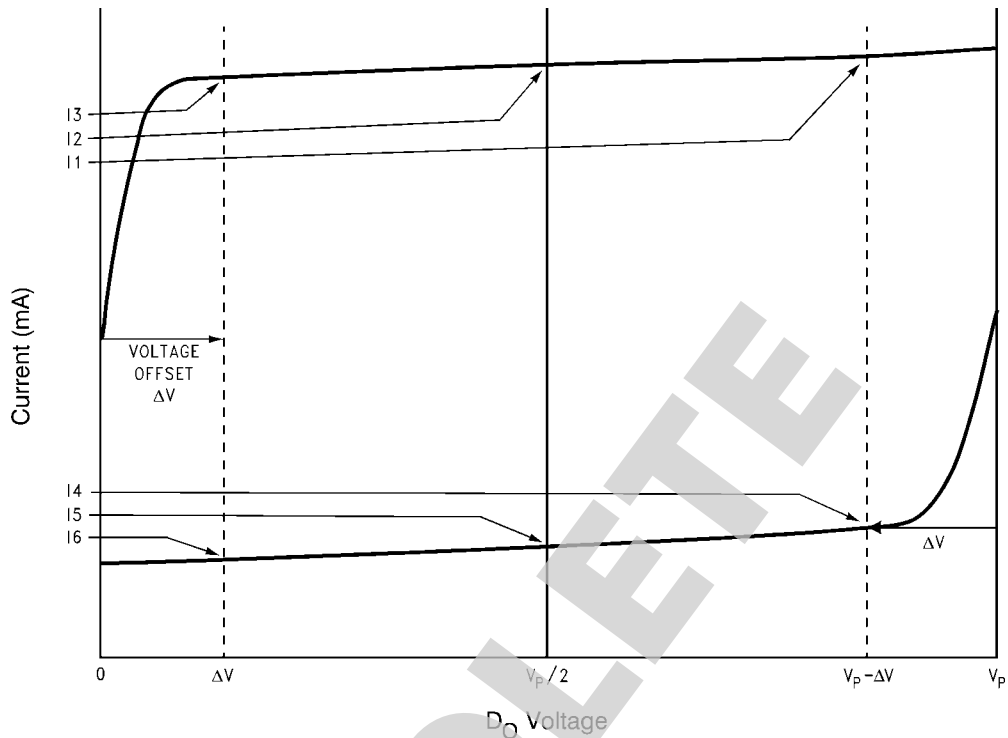

10124604

I1 = CP sink current at $V_{CP_o} = V_p - \Delta V$

I2 = CP sink current at $V_{CP_o} = V_p/2$

I3 = CP sink current at $V_{CP_o} = \Delta V$

I4 = CP source current at $V_{CP_o} = V_p - \Delta V$

I5 = CP source current at $V_{CP_o} = V_p/2$

I6 = CP source current at $V_{CP_o} = \Delta V$

ΔV = Voltage offset from positive and negative rails. Dependent on VCO tuning range relative to V_p and ground. Typical values are between 0.5V and 1.0V.

1. ICP_o vs. V_{CP_o} = Charge Pump Output Current magnitude variation vs. Voltage =

$$\left[\frac{1}{2} * \frac{\{I11 - I13\}}{\{I11 + I13\}} \right] * 100\% \quad \text{and} \quad \left[\frac{1}{2} * \frac{\{I14 - I16\}}{\{I14 + I16\}} \right] * 100\%$$

2. ICP_{o-sink} vs. $ICP_{o-source}$ = Charge Pump Output Current Sink vs. Source Mismatch =

$$\left[\frac{|I12| - I15}{\{I12 + I15\}} \right] * 100\%$$

3. ICP_o vs. T = Charge Pump Output Current magnitude variation vs. Temperature =

$$\left[\frac{I12 @ \text{temp1} - I12 @ 25^\circ\text{C}}{I12 @ 25^\circ\text{C}} \right] * 100\% \quad \text{and} \quad \left[\frac{I15 @ \text{temp1} - I15 @ 25^\circ\text{C}}{I15 @ 25^\circ\text{C}} \right] * 100\%$$

1.0 Functional Description

The basic phase-lock-loop (PLL) configuration consists of a high-stability crystal reference oscillator, a frequency synthesizer such as the National Semiconductor LMX2324A, a voltage controlled oscillator (VCO), and a passive loop filter. The frequency synthesizer includes a phase detector, current mode charge pump, as well as programmable reference [R] and feedback [N] frequency dividers. The VCO frequency is established by dividing the crystal reference signal down via the R counter to obtain a frequency that sets the comparison frequency. This reference signal, f_r , is then presented to the input of a phase/frequency detector and compared with another signal, f_p , the feedback signal, which was obtained by dividing the VCO frequency down by way of the N counter. The phase/frequency detector's current source outputs pump charge into the loop filter, which then converts the charge into the VCO's control voltage. The phase/frequency comparator's function is to adjust the voltage presented to the VCO until the feedback signal's frequency (and phase) match that of the reference signal. When this "phase-locked" condition exists, the RF VCO's frequency will be N times that of the comparison frequency, where N is the divider ratio.

1.1 OSCILLATOR

The reference oscillator frequency for the PLL is provided by an external reference TCXO through the OSC_{in} pin. OSC_{in} block can operate to 40 MHz with a minimum input sensitivity of $0.4V_{PP}$. The inputs have a $V_{CC}/2$ input threshold and can be driven from an external CMOS or TTL logic gate.

1.2 REFERENCE DIVIDERS (R COUNTER)

The R Counter is clocked through the oscillator block. The maximum frequency is 40 MHz. The R Counter is a 10 bit CMOS binary counters with a divide range from 2 to 1,023. See programming description 2.2.1.

1.3 PROGRAMMABLE DIVIDERS (N COUNTER)

The N counter is clocked by the small signal f_{IN} and f_{INB} input pins. The LMX2324A RF N counter is 15 bit integer divider. The N counter is configured as a 5 bit A Counter and a 10 bit B Counter, offering a continuous integer divide range from 992 to 32,767. The LMX2324A is capable of operating from 100 MHz to 2.0 GHz with a 32/33 prescaler.

1.3.1 Prescaler

The RF inputs to the prescaler consist of the f_{IN} and f_{INB} pins which are the complimentary inputs of a differential pair amplifier. The differential f_{IN} configuration can operate to 2 GHz with an input sensitivity of -15 dBm. The input buffer drives the N counter's ECL D-type flip flops in a dual modulus configuration. A 32/33 prescale ratio is provided for the LMX2324A. The prescaler clocks the subsequent CMOS flip-flop chain comprising the fully programmable A and B counters.

1.4 PHASE/FREQUENCY DETECTOR

The phase(/frequency) detector is driven from the N and R counter outputs. The maximum frequency at the phase detector inputs is 10 MHz. The phase detector outputs control the charge pumps. The polarity of the pump-up or pump-down control is programmed using PD_POL, depending on whether RF VCO characteristics are positive or negative (see programming description 2.2.2). The phase detector also receives a feedback signal from the charge pump, in order to eliminate dead zone.

1.5 CHARGE PUMP

The phase detector's current source output pumps charge into an external loop filter, which then converts the charge into the VCO's control voltage. The charge pumps steer the charge pump output, CP_o , to V_P (pump-up) or Ground (pump-down). When locked, CP_o is primarily in a TRI-STATE mode with small corrections. The RF charge pump output current magnitude is set to 4.0 mA. The charge pump output can also be used to output divider signals as detailed in section 2.2.3.

1.6 MICROWIRE SERIAL INTERFACE

The programmable functions are accessed through the MICROWIRE serial interface. The interface is made of three functions: clock, data and latch enable (LE). Serial data for the various counters is clocked in from data on the rising edge of clock, into the 18-bit shift register. Data is entered MSB first. The last bit decodes the internal register address. On the rising edge of LE, data stored in the shift register is loaded into one of the two appropriate latches (selected by address bits). A complete programming description is included in the following sections.

1.7 POWER CONTROL

The PLL can be power controlled in two ways. The first method is by setting the CE pin LOW. This asynchronously powers down the PLL and TRI-STATE the charge pump output, regardless of the PWDN bit status. The second method is by programming through MICROWIRE, while keeping the CE HIGH. Programming the PWDN bit in the N register HIGH (CE=HIGH) will disable the N counter and de-bias the f_{IN} input (to a high impedance state). The R counter functionality also becomes disabled. The reference oscillator block powers down when the power down bit is asserted. The OSC_{in} pin reverts to a high impedance state when this condition exists. Power down forces the charge pump and phase comparator logic to a TRI-STATE condition. A power down counter reset function resets both N and R counters. Upon powering up the N counter resumes counting in "close" alignment with the R counter (The maximum error is one prescaler cycle). The MICROWIRE control register remains active and capable of loading and latching in data during all of the power down modes.

2.0 Programming Description

2.1 MICROWIRE INTERFACE

The LMX2324A register set can be accessed through the MICROWIRE interface. A 18-bit shift register is used as a temporary register to indirectly program the on-chip registers. The shift register consists of a 17-bit DATA[16:0] field and a 1-bit address (ADDR) field as shown below. The address field is used to decode the internal register address. Data is clocked into the shift register in the direction from MSB to LSB, when the CLOCK signal goes high. On the rising edge of Load Enable (LE) signal, data stored in the shift register is loaded into the addressed latch.

| | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|--|--|--|--|--|--|------|--|--|--|--|--|--|--|---|
| MSB | | | | | | | | | | LSB | | | | | | | | |
| DATA[16:0] | | | | | | | | | | ADDR | | | | | | | | |
| 17 | | | | | | | | | | 1 | | | | | | | | 0 |

2.1.1 Registers' Address Map

When Load Enable (LE) is transitioned high, data is transferred from the 18-bit shift register into the appropriate latch depending on the state of the ADDRESS bit. A multiplexing circuit decodes the address bit and writes the data field to the corresponding internal register.

| REGISTER ADDRESSED | ADDRESS BIT ADDR |
|-----------------------|---------------------|
| R Register | 1 |
| N Register | 0 |

2.1.2 Register Content Truth Table

| | SHIFT REGISTER BIT LOCATION | | | | | | | | | | | | | | | | | LSB |
|----------|-----------------------------|-----|-----|------|-----|------------|------------|-------------|----|----|--------------|----|----|----|-------------------|----|-------------------|-----|
| | MSB | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | |
| Register | <i>Data Field</i> | | | | | | | | | | | | | | | | <i>ADDR Field</i> | |
| N | NB_CNTR[9:0] | | | | | | | | | | NA_CNTR[4:0] | | | | CTL_WORD [1:0] | | | 0 |
| R | X | X | X | TEST | RS | PD_ POL | CP_ TRI | R_CNTR[9:0] | | | | | | | | | | 1 |
| | R16 | R15 | R14 | R13 | R12 | R11 | R10 | R9 | R8 | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | |

2.2 R REGISTER

If the Address Bit (ADDR) is 1, when LE is transitioned high data is transferred from the 18-bit shift register into the 14-bit R register. The R register contains a latch which sets the PLL 10-bit R counter divide ratio. The divide ratio is programmed using the bits R_CNTR as shown in table 2.2.1. The ratio must be ≥ 2 . The PD_POL, CP_TRI and TEST bits control the phase detector polarity, charge pump TRI-STATE, and test mode respectively, as shown in 2.2.2. The RS bit is reserved and should always be set to zero. X denotes a don't care condition. Data is clocked into the shift register MSB first.

| | SHIFT REGISTER BIT LOCATION | | | | | | | | | | | | | | | | | LSB |
|----------|-----------------------------|-----|-----|------|-----|------------|------------|-------------|----|----|----|----|----|----|----|----|-------------------|-----|
| | MSB | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | |
| Register | <i>Data Field</i> | | | | | | | | | | | | | | | | <i>ADDR Field</i> | |
| R | X | X | X | TEST | RS | PD_ POL | CP_ TRI | R_CNTR[9:0] | | | | | | | | | | 1 |
| | R16 | R15 | R14 | R13 | R12 | R11 | R10 | R9 | R8 | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | |

2.2.1 10-Bit Programmable Reference Divider Ratio (R Counter)

| R_CNTR[9:0] | | | | | | | | | | |
|--------------|----|----|----|----|----|----|----|----|----|----|
| Divide Ratio | R9 | R8 | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 |
| 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| • | • | • | • | • | • | • | • | • | • | • |
| 1,023 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Notes: Divide ratio: 2 to 1,023 (Divide ratios less than 2 are prohibited)
R_CNTR—These bits select the divide ratio of the programmable reference dividers.

2.2.2 R Register Truth Table

| Bit | Location | Function | 0 | 1 |
|--------|----------|-------------------------|------------------|-----------|
| CP_TRI | R[10] | Charge Pump TRI-STATE | Normal Operation | TRI-STATE |
| PD_POL | R[11] | Phase Detector Polarity | Negative | Positive |
| TEST | R[13] | Test Mode Bit | Normal Operation | Test Mode |

If the test mode is NOT activated (R[13]=0), the charge pump is active when CP_TRI is set LOW. When CP_TRI is set HIGH, the charge pump output and phase comparator are forced to a TRI-STATE condition. This bit must be set HIGH if the test mode is ACTIVATED (R[13]=1).

If the test mode is NOT activated (R[13]=0), PD_POL sets the VCO characteristics to positive when set HIGH. When PD_POL is set LOW, the VCO exhibits a negative characteristic where the VCO frequency decreases with increasing control voltage.

If the test mode is ACTIVATED (R[13]=1), the outputs of the N and R counters are directed to the CP_o output to allow for testing. The PD_POL bit selects which counter output according to Table 2.2.3.

2.2.3 Test Mode Truth Table (R[13] = 1)

| CP _o Output | CP_TRI R[10] | PD_POL R[11] |
|------------------------|--------------|--------------|
| R Divider Output | 1 | 0 |
| N Divider Output | 1 | 1 |

2.3 N REGISTER

If the address bit is LOW (ADDR=0) when LE is transitioned high, data is transferred from the 18-bit shift register into the 17-bit N register. The N register consists of the 5-bit swallow counter (A counter), the 10-bit programmable counter (B counter) and the control word. Serial data format is shown below in tables 2.3.1 and 2.3.2. The pulse swallow function which determines the divide ratio is described in section 2.3.3. Data is clocked into the shift register MSB first.

| | SHIFT REGISTER BIT LOCATION | | | | | | | | | | | | | | | | | LSB |
|----------|-----------------------------|-----|-----|-----|-----|-----|-----|----|----|----|--------------|----|----|----|----|----------------|----|------------|
| | MSB | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | |
| Register | Data Field | | | | | | | | | | | | | | | | | ADDR Field |
| N | NB_CNTR[9:0] | | | | | | | | | | NA_CNTR[4:0] | | | | | CTL_WORD [1:0] | | 0 |
| | N16 | N15 | N14 | N13 | N12 | N11 | N10 | N9 | N8 | N7 | N6 | N5 | N4 | N3 | N2 | N1 | N0 | |

2.3.1 5-Bit Swallow Counter Divide Ratio (A Counter)

| Swallow Count | NA_CNTR[4:0] | | | | |
|---------------|--------------|----|----|----|----|
| (A) | N6 | N5 | N4 | N3 | N2 |
| 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0 | 0 | 0 | 0 | 1 |
| • | • | • | • | • | • |
| 31 | 1 | 1 | 1 | 1 | 1 |

Notes: Swallow Counter Value: 0 to 31
 NB_CNTR ≥ NA_CNTR

2.3.2 10-Bit Programmable Counter Divide Ratio (B Counter)

| Divide Ratio | NB_CNTR[10:0] | | | | | | | | | |
|--------------|---------------|-----|-----|-----|-----|-----|-----|----|----|----|
| | N16 | N15 | N14 | N13 | N12 | N11 | N10 | N9 | N8 | N7 |
| 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| • | • | • | • | • | • | • | • | • | • | • |
| 1023 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Notes: Divide ratio: 3 to 1,023 (Divide ratios less than 3 are prohibited)
 NB_CNTR ≥ NA_CNTR

2.3.3 Pulse Swallow Function

The N divider counts such that it divides the VCO RF frequency by (P+1) A times, and then divides by P (B - A) times. The B value (NB_CNTR) must be ≥ 3. The continuous divider ratio is from 992 to 32,767. Divider ratios less than 992 are achievable as long as the binary counter value is greater than the swallow counter value (NB_CNTR ≥ NA_CNTR).

$$f_{VCO} = N \times (f_{OSC}/R)$$

$$N = (P \times B) + A$$

f_{VCO} : Output frequency of external voltage controlled oscillator (VCO)

f_{OSC} : Output frequency of the external reference frequency oscillator

R: Preset divide ratio of binary 10-bit programmable reference counter (2 to 1023)

N: Preset divide ratio of main 15-bit programmable integer N counter (992 to 32,767)

B: Preset divide ratio of binary 10-bit programmable B counter (3 to 1023)

A: Preset value of binary 5-bit swallow A counter ($0 \leq A \leq 31$, $A \leq B$)

P: Preset modulus of dual modulus prescaler ($P=32$)

2.3.4 CTL_WORD

| | |
|---------|------|
| MSB | LSB |
| N1 | N0 |
| CNT_RST | PWDN |

2.3.4.1 Control Word Truth Table

| CE | CNT_RST | PWDN | Function |
|----|---------|------|------------------------|
| 1 | 0 | 0 | Normal Operation |
| 1 | 0 | 1 | Synchronous Powerdown |
| 1 | 1 | 0 | Counter Reset |
| 1 | 1 | 1 | Asynchronous Powerdown |
| 0 | X | X | Asynchronous Powerdown |

Notes: X denotes don't care.

The **Counter Reset** enable bit when activated allows the reset of both N and R counters. Upon powering up the N counter resumes counting in "close" alignment with the R counter. (The maximum error is one prescaler cycle).

Both synchronous and asynchronous **power down** modes are available with the LMX2324A to be able to adapt to different types of applications. The MICROWIRE control register remains active and capable of loading and latching in data during all of the powerdown modes.

Synchronous Power down Mode


The PLL loops can be synchronously powered down by setting the counter reset mode bit to LOW ($N[1] = 0$) and its power down mode bit to HIGH ($N[0] = 1$). The power down function is gated by the charge pump. Once the power down mode and counter reset mode bits are loaded, the part will go into power down mode upon the completion of a charge pump pulse event.

Asynchronous Power down Mode

The PLL loops can be asynchronously powered down by setting the counter reset mode bit to HIGH ($N[1] = 1$) and its power down mode bit to HIGH ($N[0] = 1$), or by setting CE pin LOW. The power down function is NOT gated by the charge pump. Once the power down and counter reset mode bits are loaded, the part will go into power down mode immediately.

The R and N counters are disabled and held at load point during the synchronous and asynchronous power down modes. This will allow a smooth acquisition of the RF signal when the PLL is programmed to power up. Upon powering up, both R and N counters will start at the 'zero' state, and the relationship between R and N will not be random.

Serial Data Input Timing

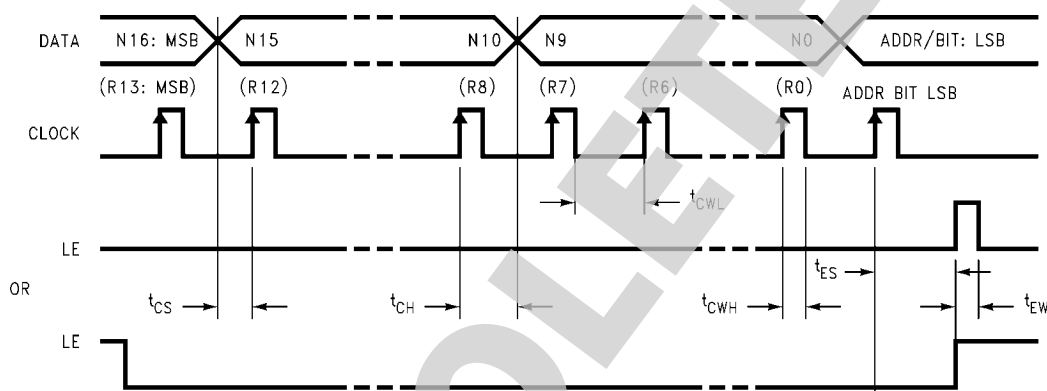

10124605


Notes: Parenthesis data indicates programmable reference divider data.

Data shifted into register on clock rising edge.

Data is shifted in MSB first.

Test Conditions: The Serial Data Input Timing is tested using a symmetrical waveform around $V_{CC}/2$. The test waveform has an edge rate of 0.6 V/ns with amplitudes of 1.6V @ $V_{CC} = 2.7V$ and 3.3V @ $V_{CC} = 5.5V$.

Phase Comparator and Internal Charge Pump Characteristics

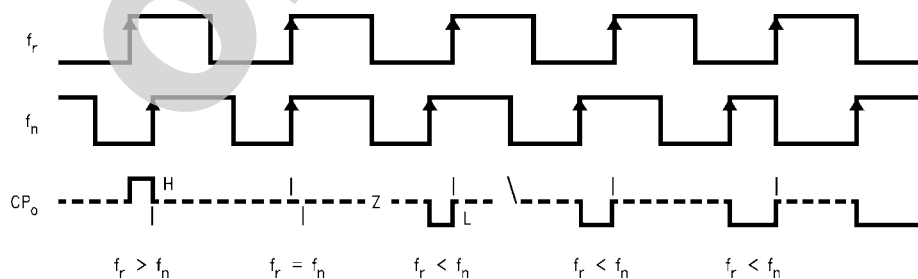

10124606

Notes: Phase difference detection range: $-2T$ to $+2T$


The minimum width pump up and pump down current pulses occur at the CP_o pin when the loop is locked. $PD_POL = 1$

f_R : Phase comparator input from the R Divider

f_N : Phase comparator input from the N divider

CP_o : Charge pump output

Physical Dimensions inches (millimeters) unless otherwise noted

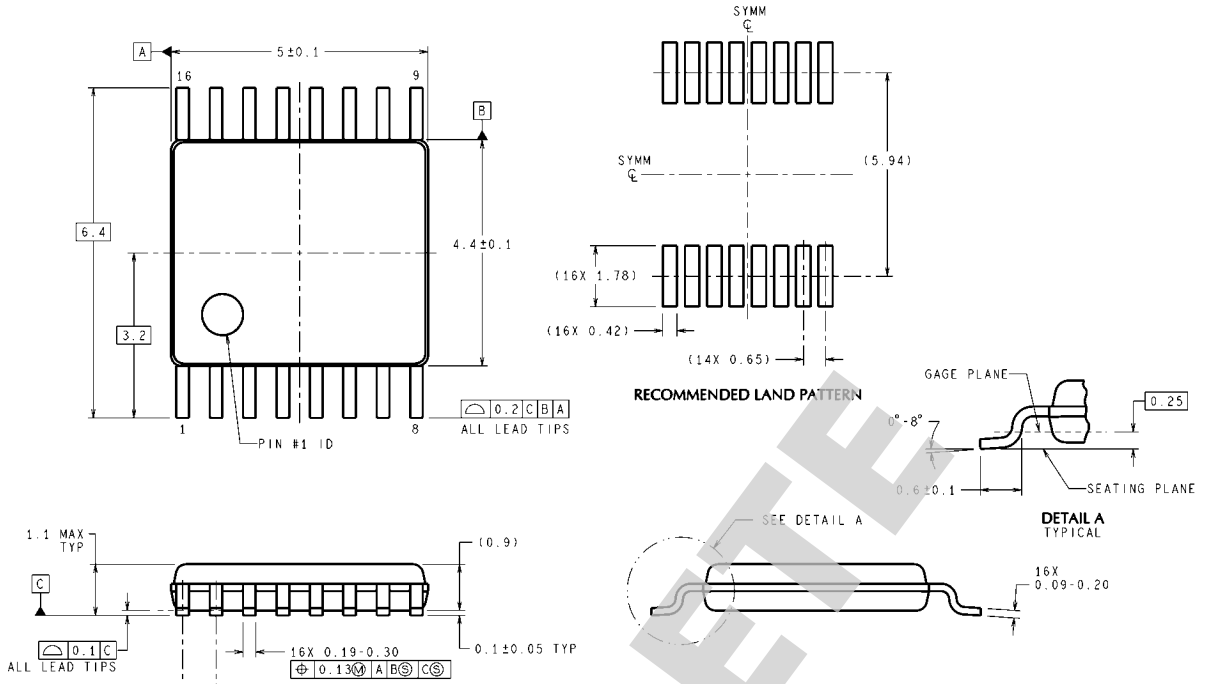

DIMENSIONS ARE IN MILLIMETERS
DIMENSIONS IN () FOR REFERENCE ONLY

16-Pin Thin Shrink Small Outline Package
Order Number, LMX2324ATMX
NS Package Number MTC16

MTC16 (Rev D)

OBSOLETE

Notes

LMX2324A

OBSOLETE

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

| Products | | Design Support | |
|--------------------------------|--|------------------------------|--|
| Amplifiers | www.national.com/amplifiers | WEBENCH® Tools | www.national.com/webench |
| Audio | www.national.com/audio | App Notes | www.national.com/appnotes |
| Clock and Timing | www.national.com/timing | Reference Designs | www.national.com/refdesigns |
| Data Converters | www.national.com/adc | Samples | www.national.com/samples |
| Interface | www.national.com/interface | Eval Boards | www.national.com/evalboards |
| LVDS | www.national.com/lvds | Packaging | www.national.com/packaging |
| Power Management | www.national.com/power | Green Compliance | www.national.com/quality/green |
| Switching Regulators | www.national.com/switchers | Distributors | www.national.com/contacts |
| LDOs | www.national.com/ldo | Quality and Reliability | www.national.com/quality |
| LED Lighting | www.national.com/led | Feedback/Support | www.national.com/feedback |
| Voltage References | www.national.com/vref | Design Made Easy | www.national.com/easy |
| PowerWise® Solutions | www.national.com/powerwise | Applications & Markets | www.national.com/solutions |
| Serial Digital Interface (SDI) | www.national.com/sdi | Mil/Aero | www.national.com/milaero |
| Temperature Sensors | www.national.com/tempensors | SolarMagic™ | www.national.com/solarmagic |
| PLL/VCO | www.national.com/wireless | PowerWise® Design University | www.national.com/training |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY


NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2010 National Semiconductor Corporation

For the most current product information visit us at www.national.com


National Semiconductor
Americas Technical
Support Center
 Email: support@nsc.com
 Tel: 1-800-272-9959

National Semiconductor Europe
Technical Support Center
 Email: europe.support@nsc.com

National Semiconductor Asia
Pacific Technical Support Center
 Email: ap.support@nsc.com

National Semiconductor Japan
Technical Support Center
 Email: jpn.feedback@nsc.com

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Mobile Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Transportation and Automotive | www.ti.com/automotive |
| Video and Imaging | www.ti.com/video |

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated