

# DS1651,DS3651

*DS1651/DS3651 Quad High Speed MOS Sense Amplifiers*



Literature Number: SNLS371

## DS1651/DS3651

### Quad High Speed MOS Sense Amplifiers


#### General Description

The DS1651/DS3651 is TTL compatible high speed circuits intended for sensing in a broad range of MOS memory system applications. Switching speeds have been enhanced over conventional sense amplifiers by application of Schottky technology, and TRI-STATE® strobing is incorporated, offering a high impedance output state for bused organization. The DS1651/DS3651 has active pull-up outputs and offers open collector outputs providing implied "AND" operations.

#### Features

- High speed
- TTL compatible
- Input sensitivity —  $\pm 7$  mV
- TRI-STATE outputs for high speed buses
- Standard supply voltages —  $\pm 5$ V
- Pin and function compatible with MC3430

#### Connection Diagram

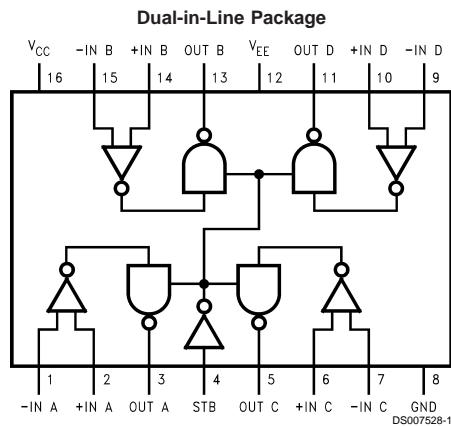


#### Truth Table

Input	Strobe	Output
		DS3651
$V_{ID} \geq 7$ mV $T_A = 0^\circ\text{C to } +70^\circ\text{C}$	L	H
$-7$ mV $\leq V_{ID} \leq +7$ mV $T_A = 0^\circ\text{C to } +70^\circ\text{C}$	H	Open
$V_{ID} \leq -7$ mV $T_A = 0^\circ\text{C to } +70^\circ\text{C}$	L	L
	H	Open

L = Low logic state  
H = High logic state  
Open = TRI-STATE  
X = Indeterminate state

## Typical Applications

A Typical MOS Memory Sensing Application for a 4k word by 4-bit Memory Arrangement Employing 1103 Type Memory Devices

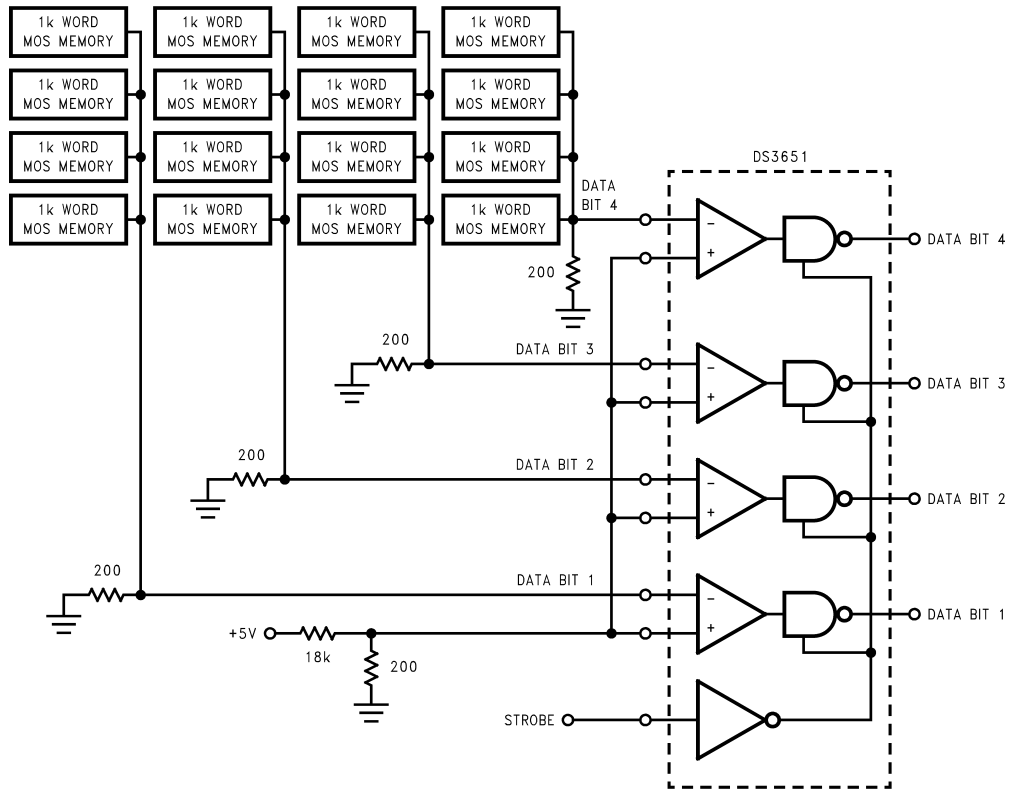

DS007528-2

**Note:** Only 4 devices are required for a 4k word by 16-bit memory system.

## Absolute Maximum Ratings (Note 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

### Power Supply Voltages

$V_{CC}$	+7 $V_{DC}$
$V_{EE}$	-7 $V_{DC}$

### Differential-Mode Input Signal Voltage Range, $V_{IDR}$

	$\pm 6 V_{DC}$
--	----------------

### Common-Mode Input Voltage Range, $V_{ICR}$

	$\pm 5 V_{DC}$
--	----------------

### Strobe Input Voltage, $V_{I(S)}$

	$5.5 V_{DC}$
--	--------------

### Strobe Temperature Range

	-65°C to +150°C
--	-----------------

### Maximum Power Dissipation (Note 1) at 25°C

Cavity Package	1509 mW
Molded Package	1476 mW

### Lead Temp. (Soldering, 10 seconds)

	300°C
--	-------

## Operating Conditions

	Min	Max	Unit
Supply Voltage ( $V_{CC}$ )			
DS1651	4.5	5.5	V
DS3651	4.75	5.25	V
Supply Voltage ( $V_{EE}$ )			
DS1651	-4.5	-5.5	V
DS3651	-4.75	-5.25	V
Operating Temperature ( $T_A$ )			
DS1651	-55	+125	°C
DS3651	0	+70	°C
Output Load Current, ( $I_{OL}$ )		16	mA
Differential Mode Input Voltage Range, ( $V_{IDR}$ )	-5.0	+5.0	V
Common-Mode Input Voltage Range, ( $V_{ICR}$ )	-3.0	+3.0	V
Input Voltage Range (Any Input to GND), ( $V_{IR}$ )	-5.0	+3.0	V

## Electrical Characteristics

$V_{CC} = 5 V_{DC}$ ;  $V_{EE} = -5 V_{DC}$ ;  $\text{Min} \leq T_A \leq \text{Max}$ , unless otherwise noted (Notes 3, 4)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit		
$V_{IS}$	Input Sensitivity (Note 6) (Common-Mode Voltage Range) $V_{ICR} = -3V \leq V_{IN} \leq +3V$	$\text{Min} \leq V_{CC} \leq \text{Max}$ $\text{Min} \geq V_{EE} \geq \text{Max}$			$\pm 7.0$	mV		
$V_{IO}$	Input Offset Voltage			2		mV		
$I_{IB}$	Input Bias Current	$V_{CC} = \text{Max}$ , $V_{EE} = \text{Max}$			20	$\mu\text{A}$		
$I_{IO}$	Input Offset Current			0.5		$\mu\text{A}$		
$V_{IL(S)}$	Strobe Input Voltage (Low State)				0.8	V		
$V_{IH(S)}$	Strobe Input Voltage (High State)		2			V		
$I_{IL(S)}$	Strobe Current (Low State)	$V_{CC} = \text{Max}$ , $V_{EE} = \text{Max}$ , $V_{IN} = 0.4V$			-1.6	mA		
$I_{IL(S)}$	Strobe Current (High State)	$V_{CC} = \text{Max}$ , $V_{EE} = \text{Max}$	$V_{IN} = 2.4V$	DS3651		40	$\mu\text{A}$	
			$V_{IN} = V_{CC}$			1	mA	
		$V_{CC} = \text{Max}$ , $V_{EE} = \text{Max}$	$V_{IN} = 2.4V$	DS1651			100	$\mu\text{A}$
			$V_{IN} = V_{CC}$				1	mA
$V_{OH}$	Output Voltage (High States)	$V_{CC} = \text{Min}$ , $V_{EE} = \text{Min}$	$I_O = -400 \mu\text{A}$	DS1651/DS3651	2.4		V	
$V_{OL}$	Output Voltage (Low State)	$V_{CC} = \text{Min}$ , $V_{EE} = \text{Min}$	$I_O = 16 \text{ mA}$	DS3651		0.45	V	
				DS1651		0.50		
$I_{OS}$	Output Current Short Circuit	$V_{CC} = \text{Max}$ , $V_{EE} = \text{Max}$ , (Note 5)		DS1651/DS3651	-18	-70	mA	
$I_{OFF}$	Output Disable Leakage Current	$V_{CC} = \text{Max}$ , $V_{EE} = \text{Max}$		DS3651		40	$\mu\text{A}$	
				DS1651		100	$\mu\text{A}$	
$I_{CC}$	High Logic Level Supply Current	$V_{CC} = \text{Max}$ , $V_{EE} = \text{Max}$		45	60	mA		
$I_{EE}$	High Logic Level Supply Current	$V_{CC} = \text{Max}$ , $V_{EE} = \text{Max}$		-17	-30	mA		

## Switching Characteristics

$V_{CC} = 5 V_{DC}$ ,  $V_{EE} = -5 V_{DC}$ ,  $T_A = 25^\circ C$  unless otherwise noted.

Symbol	Parameter	Conditions		Min	Typ	Max	Units
$t_{PHL(D)}$	High-to-Low Logic Level Propagation Delay Time (Differential Inputs)	5 mV + $V_{IS}$ , (Figure 2)	DS1651/ DS3651		23	45	ns
$t_{PLH(D)}$	Low-to-High Logic Level Propagation Delay Time (Differential Inputs)	5 mV + $V_{IS}$ , (Figure 2)	DS1651/ DS3651		22	55	ns
$t_{POH(S)}$	TRI-STATE to High Logic Level Propagation Delay Time (Strobe)	(Figure 1)	DS1651/ DS3651		16	21	ns
$t_{PHO(S)}$	High Logic Level to TRI-STATE Propagation Delay Time (Strobe)	(Figure 1)	DS1651/ DS3651		7	18	ns
$t_{POL(S)}$	TRI-STATE to Low Logic Level Propagation Delay Time (Strobe)	(Figure 1)	DS1651/ DS3651		19	27	ns
$t_{PLO(S)}$	Low Logic Level to TRI-STATE Propagation Delay Time (Strobe)	(Figure 1)	DS1651/ DS3651		14	29	ns

**Note 1:** Derate cavity package 10.1 mW/°C above 25°C; derate molded package 11.8 mW/°C above 25°C.

**Note 2:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the device should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.


**Note 3:** Unless otherwise specified min/max limits apply across the 0°C to +70°C range for the DS3651 and across the -55°C to +125°C range for the DS1651. All typical values are for  $T_A = 25^\circ C$ ,  $V_{CC} = 5V$  and  $V_{EE} = -5V$ .

**Note 4:** All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

**Note 5:** Only one output at a time should be shorted.

**Note 6:** A parameter which is of primary concern when designing with sense amplifiers is, what is the minimum differential input voltage required at the sense amplifier input terminals to guarantee a given output logic state. This parameter is commonly referred to as threshold voltage. It is well known that design considerations of threshold voltage are plagued by input offset currents, bias currents, network source resistances, and voltage gain. As a design convenience, the DS1651 and DS3651 are specified to a parameter called input sensitivity ( $V_{IS}$ ). This parameter takes into consideration input offset currents and bias currents, and guarantees a minimum input differential voltage to cause a given output logic state with respect to a maximum source impedance of 200Ω at each input.

## Switching Time Waveform

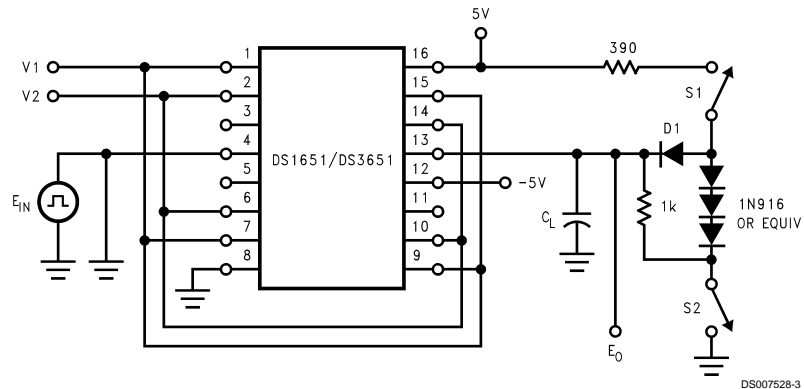

**Note:** Output of channel B shown under test, other channels are tested similarly.

Delay	V1	V2	S1	S2	$C_L$
$t_{PLO(S)}$	100 mV	GND	Closed	Closed	15 pF
$t_{POL(S)}$	100 mV	GND	Closed	Open	50 pF
$t_{PHO(S)}$	GND	100 mV	Closed	Closed	15 pF
$t_{POH(S)}$	GND	100 mV	Open	Closed	50 pF

$C_L$  includes jig and probe capacitance.

$E_{IN}$  waveform characteristics:  $t_{TLH}$  and  $t_{THL} \leq 10$  ns measured 10% to 90%

PRR = 1 MHz

Duty cycle = 50%

## AC Test Circuits



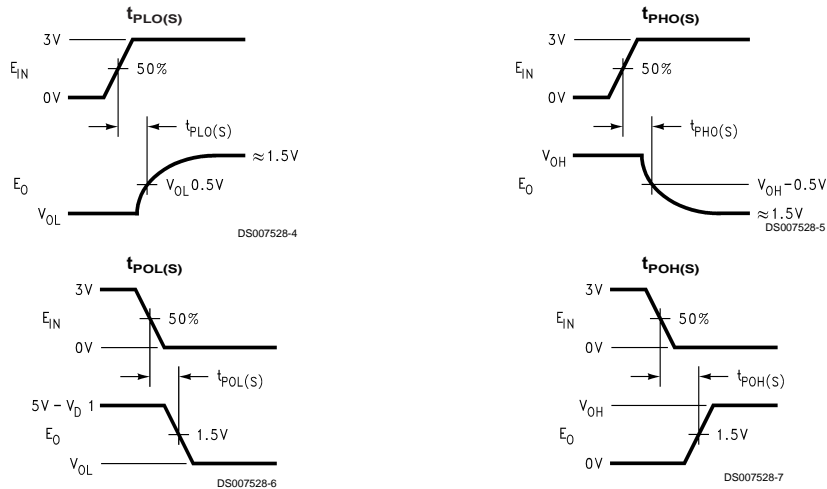


FIGURE 1. Strobe Propagation Delay  $t_{PLO}(s)$ ,  $t_{POL}(s)$ ,  $t_{PHL}(s)$  and  $t_{POH}(s)$

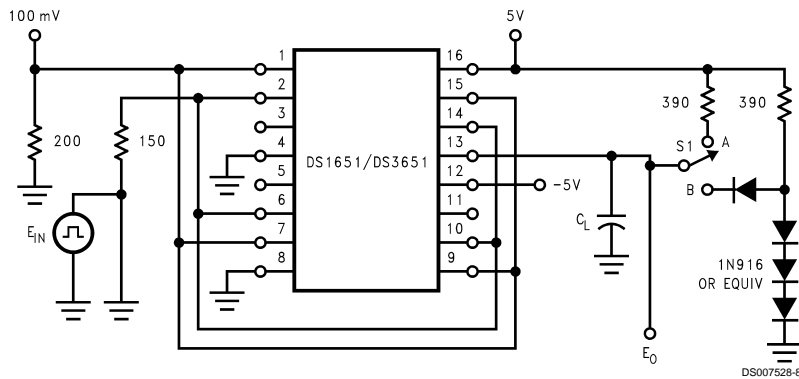


Note: Output of channel B shown under test, other channels are tested similarly. S1 at "B" for DS1651/DS3651,  $C_L = 50$  pF total for DS1651/DS3651.

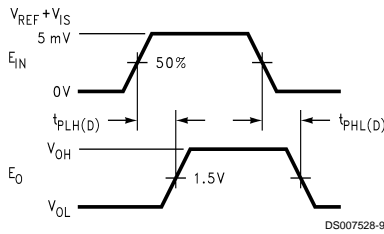

$E_{IN}$  waveform characteristics:  
 $t_{RLH}$  and  $t_{THL} \leq 10$  ns measured 10% to 90%  
 PRR = 1 MHz, duty cycle = 500 ns


FIGURE 2. Differential Input Propagation Delay  $t_{PLH}(D)$  and  $t_{PHL}(D)$

# Schematic Diagrams

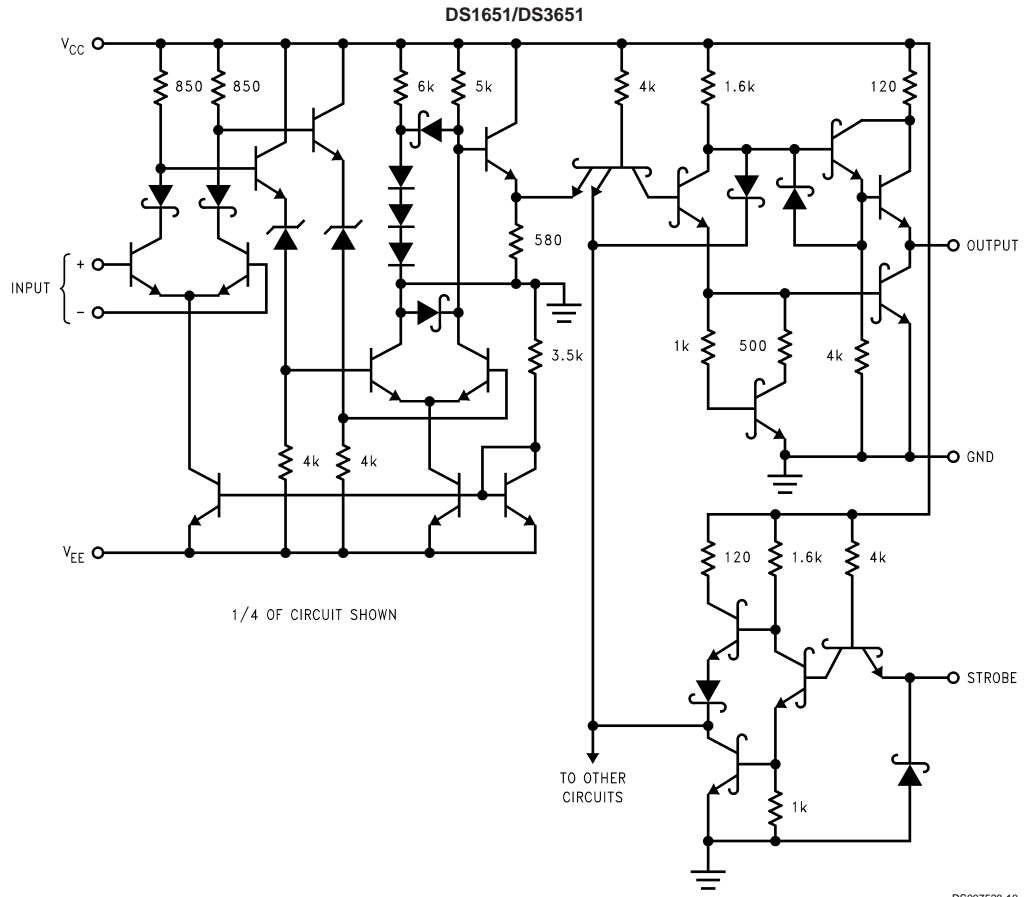


## Typical Applications

### Level Detector with Hysteresis



### Transfer Characteristics and Equations for Level Detector with Hysteresis

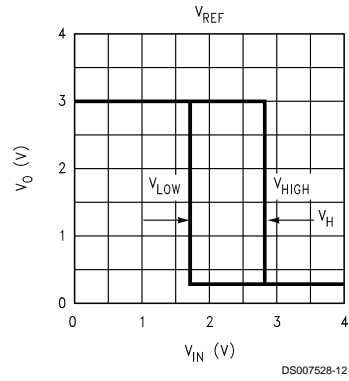

$$V_{HIGH} = V_{REF} + \frac{R_2 [V_{O(MAX)} - V_{REF}]}{R_1 + R_2}$$

$$V_{LOW} = V_{REF} + \frac{R_2 [V_{O(MIN)} - V_{REF}]}{R_1 + R_2}$$


Hysteresis Loop ( $V_H$ )

$$V_H = V_{HIGH} - V_{LOW} = \frac{R_2}{R_1 + R_2} [V_{O(MAX)} - V_{O(MIN)}]$$



## Typical Applications (Continued)

### 4-Bit Parallel A/D Converter

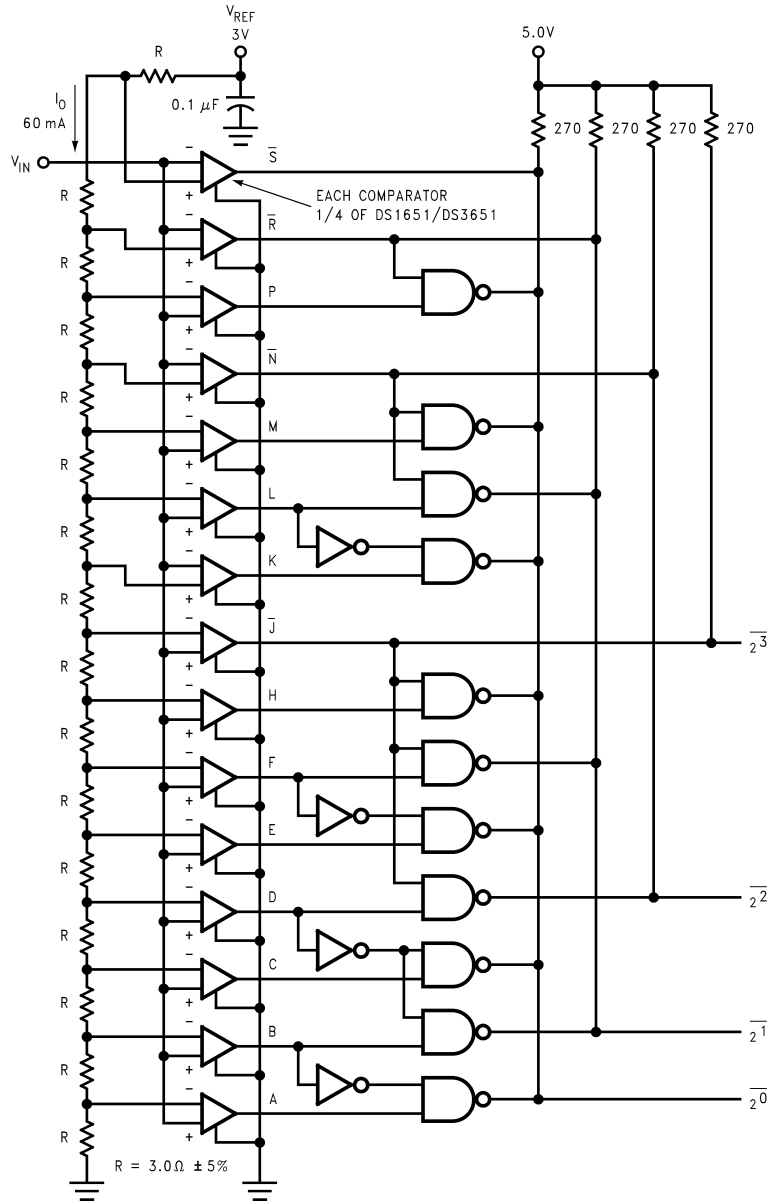

DS007528-14

$$\bar{2}^0 = (\bar{A} + B) (\bar{C} + D) (\bar{E} + F) (\bar{H} + J) (\bar{K} + L) (\bar{M} + N) (\bar{P} + R) (\bar{S})$$


$$\bar{2}^1 = (\bar{B} + D) (\bar{F} + J) (\bar{L} + N) (\bar{R})$$

$$\bar{2}^2 = (\bar{D} + J) (\bar{N})$$


$$\bar{2}^3 = \bar{J}$$

Conversion time  $\approx 50$  ns

**Physical Dimensions** inches (millimeters) unless otherwise noted

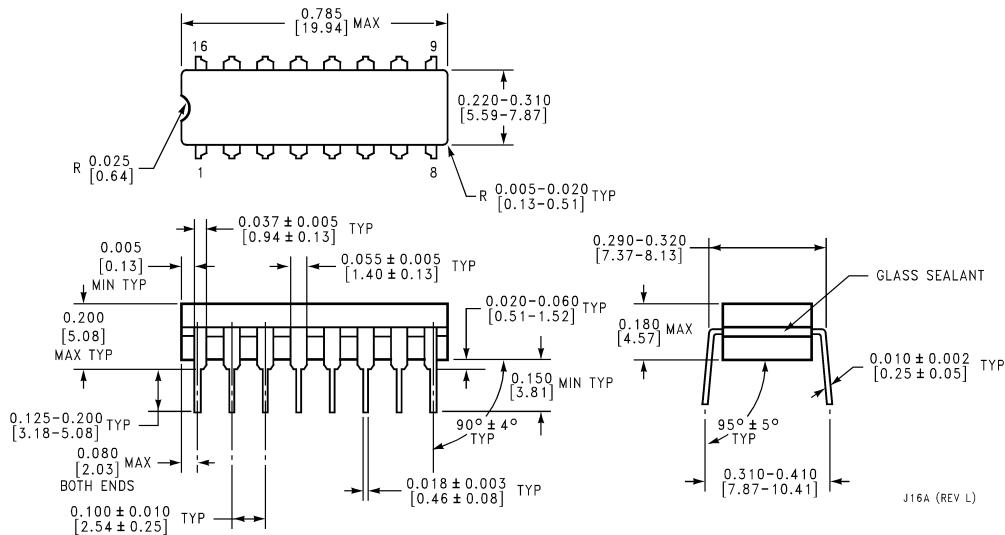

**Ceramic Dual-in-Line Package (J)**  
**Order Number DS1651J, DS1653J, DS3651J or DS3653J**  
**NS Package Number J16A**

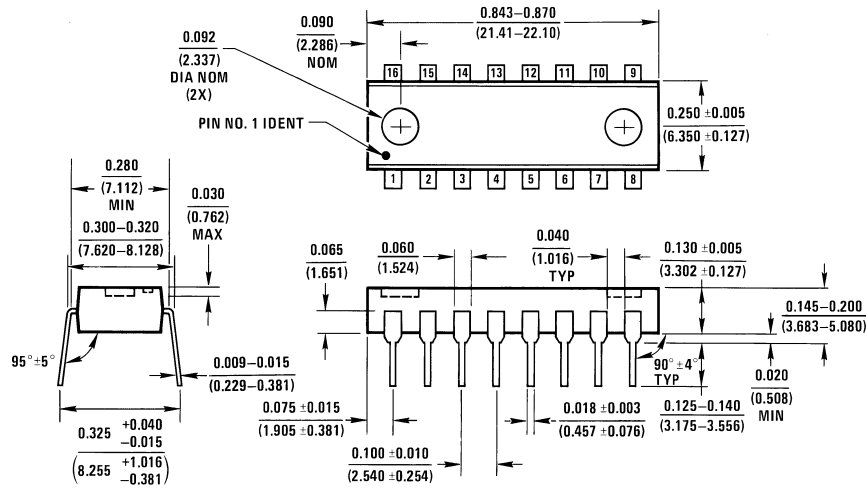

**Molded Dual-in-Line Package (N)**  
**Order Number DS3651N or DS3653N**  
**NS Package Number N16A**

## Notes

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
Americas  
Tel: 1-800-272-9959  
Fax: 1-800-737-7018  
Email: support@nsc.com

[www.national.com](http://www.national.com)

**National Semiconductor Europe**  
Fax: +49 (0) 1 80-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 1 80-530 85 85  
English Tel: +49 (0) 1 80-532 78 32  
Français Tel: +49 (0) 1 80-532 93 58  
Italiano Tel: +49 (0) 1 80-534 16 80

**National Semiconductor Asia Pacific Customer Response Group**  
Tel: 65-2544466  
Fax: 65-2504466  
Email: sea.support@nsc.com

**National Semiconductor Japan Ltd.**  
Tel: 81-3-5639-7560  
Fax: 81-3-5639-7507

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Transportation and Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated