

# DS8935

*DS8935 LocalTalk Dual Driver/Triple Receiver*



Literature Number: SNOS729A

# DS8935 LocalTalk™ Dual Driver/Triple Receiver

## General Description

The DS8935 is a dual driver/triple receiver device optimized to provide a single chip solution for a LocalTalk Interface. The device provides one differential TIA/EIA-422 driver, one TIA/EIA-423 single ended driver, one TIA/EIA-422 receiver and two TIA/EIA-423 receivers, all in a surface mount 16-pin package. This device is electrically similar to the 26LS30 and 26LS32 devices.


The drivers feature  $\pm 10V$  common mode range, and the differential driver provides TRI-STATEable outputs. The receivers offer  $\pm 200$  mV thresholds over the  $\pm 10V$  common mode range.

The device offers enable circuitry for the differential driver and selectable enabling for the three receivers.


## Features

- Single chip solution for LocalTalk port
- Two driver/three receivers per package
- Wide common mode range:  $\pm 10V$
- $\pm 200$  mV receiver sensitivity
- 70 mV typical receiver input hysteresis
- Available in SOIC packaging
- Failsafe receiver for open inputs

## Connection Diagram

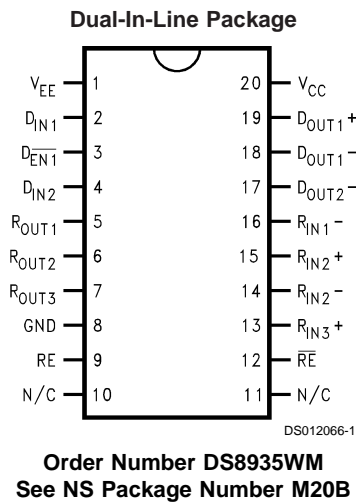

## Functional Diagram

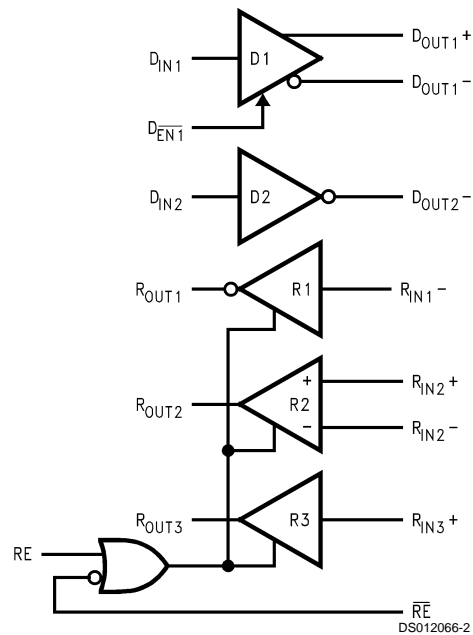

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage ( $V_{CC}$ )	+7V
Supply Voltage ( $V_{EE}$ )	-7V
Enable Input Voltage ( $\overline{D_{EN1}}$ , RE, $\overline{RE}$ )	+7V
Driver Input Voltage ( $D_{IN}$ )	+7V
Driver Output Voltage (Power Off: $D_{OUT}$ )	±15V
Receiver Input Voltage ( $V_{ID}$ : $R_{IN+} - R_{IN-}$ )	±25V
Receiver Input Voltage ( $V_{CM}$ : $(R_{IN+} + R_{IN-})/2$ )	±25V
Receiver Input Voltage (Input to GND: $R_{IN}$ )	±25V
Receiver Output Voltage ( $R_{OUT}$ )	+5.5V
Maximum Package Power Dissipation @+25°C M Package	1.34W

Derate M Package 10.7 mW/°C above +25°C  
Storage Temperature Range -65°C to +150°C  
Lead Temperature Range (Soldering, 4 Sec.) +260°C  
This device does not meet 2000V ESD Rating (Note 8)

**Recommended Operating Conditions**

	Min	Typ	Max	Units
Supply Voltage ( $V_{CC}$ )	+4.75	+5.0	+5.25	V
Supply Voltage ( $V_{EE}$ )	-4.75	-5.0	-5.25	V
Operating Free Air Temperature ( $T_A$ )	0	25	70	°C

**Electrical Characteristics** (Notes 2, 3)

Over Supply Voltage and Operating Temperature ranges, unless otherwise specified

Symbol	Parameter	Conditions	Pin	Min	Typ	Max	Units
<b>DIFFERENTIAL DRIVER CHARACTERISTICS</b>							
$V_{OD}$	Output Differential Voltage	$R_L = \infty$ or $R_L = 3.9\text{ k}\Omega$	$D_{OUT+}$ , $D_{OUT-}$	±7	±9.0	±10	V
$V_O$	Output Voltage	$R_L = \infty$ or $R_L = 3.9\text{ k}\Omega$		±4.5	±5.25	V	
$V_{OD1}$	Output Differential Voltage	$R_L = 100\Omega$ , <i>Figure 1</i>		4.0	6.4	V	
$V_{SS}$	$ V_{OD1} - \overline{V_{OD1}} $			8.0	12.8	V	
$\Delta V_{OD1}$	Output Unbalance			0.02	0.4	V	
$V_{OS}$	Offset Voltage			0	3	V	
$\Delta V_{OS}$	Offset Unbalance			0.05	0.4	V	
$V_{OD2}$	Output Differential Voltage	$R_L = 140\Omega$ , <i>Figure 1</i>		6.0	7.0	V	
$I_{OZD}$	TRI-STATE® Leakage Current	$V_{CC} = 5.25\text{V}$ $V_{EE} = -5.25\text{V}$		$V_O = +10\text{V}$	2	150	µA
				$V_O = +6\text{V}$	1	100	µA
			$V_O = -6\text{V}$	-1	-100	µA	
			$V_O = -10\text{V}$	-2	-150	µA	
<b>SINGLE ENDED DRIVER CHARACTERISTICS</b>							
$V_O$	Output Voltage (No Load)	$R_L = \infty$ or $R_L = 3.9\text{ k}\Omega$ , <i>Figure 2</i>	$D_{OUT-}$	4	4.4	6	V
$V_T$	Output Voltage	$R_L = 3\text{ k}\Omega$ , <i>Figure 2</i>		3.7	4.3	V	
		$R_L = 450\Omega$ , <i>Figure 2</i>		3.6	4.1	V	
$\Delta V_T$	Output Unbalance			0.02	0.4	V	
<b>DRIVER CHARACTERISTICS</b>							
$V_{CM}$	Common Mode Range	Power Off, or D1 Disabled	$D_{OUT+}$ , $D_{OUT-}$	±10			V
$I_{OSD}$	Short Circuit Current	$V_O = 0\text{V}$ , Sourcing Current		-80	-150	mA	
		$V_O = 0\text{V}$ , Sinking Current		80	150	mA	
$I_{OxD}$	Power-Off Leakage Current ( $V_{CC} = V_{EE} = 0\text{V}$ )	$V_O = +10\text{V}$		2	150	µA	
		$V_O = +6\text{V}$		1	100	µA	
		$V_O = -6\text{V}$		-1	-100	µA	
		$V_O = -10\text{V}$		-2	-150	µA	

## Electrical Characteristics (Notes 2, 3) (Continued)

Over Supply Voltage and Operating Temperature ranges, unless otherwise specified

Symbol	Parameter	Conditions	Pin	Min	Typ	Max	Units	
<b>RECEIVER CHARACTERISTICS</b>								
$V_{TH}$	Input Threshold	$-7V \leq V_{CM} \leq +7V$	$R_{IN+}$ , $R_{IN-}$	-200	$\pm 35$	+200	mV	
$V_{HY}$	Hysteresis	$V_{CM} = 0V$			70		mV	
$R_{IN}$	Input Resistance	$-10V \leq V_{CM} \leq +10V$			6.0	8.5	k $\Omega$	
$I_{IN}$	Input Current (Other Input = 0V, Power On, or $V_{CC} = V_{EE} = 0V$ )	$V_{IN} = +10V$					3.25	mA
		$V_{IN} = +3V$			0		1.50	mA
		$V_{IN} = -3V$			0		-1.50	mA
		$V_{IN} = -10V$				-3.25	mA	
$V_{IB}$	Input Balance Test	$R_S = 500\Omega$ (R2 only)				$\pm 400$	mV	
$V_{OH}$	High Level Output Voltage	$I_{OH} = -400 \mu A$ , $V_{IN} = +200 mV$	$R_{OUT}$	2.7	4.2		V	
		$I_{OH} = -400 \mu A$ , $V_{IN} = OPEN$		2.7	4.2		V	
$V_{OL}$	Low Level Output Voltage	$I_{OL} = 8.0 mA$ , $V_{IN} = -200 mV$			0.3	0.5	V	
$I_{OSR}$	Short Circuit Current	$V_O = 0V$		-15	-34	-85	mA	
$I_{OZR}$	TRI-STATE Output Current	$V_{CC} = Max$		$V_O = 2.4V$		0	+20	$\mu A$
				$V_O = 0.4V$		0	-20	$\mu A$

### DEVICE CHARACTERISTICS

$V_{IH}$	High Level Input Voltage		$D_{IN}$ , $D_{EN1}$ , $RE$ , $\overline{RE}$	2.0			V
$V_{IL}$	Low Level Input Voltage					0.8	V
$I_{IH}$	High Level Input Current	$V_{IN} = 2.4V$			1	40	$\mu A$
$I_{IL}$	Low Level Input Current	$V_{IN} = 0.4V$			-10	-200	$\mu A$
$V_{CL}$	Input Clamp Voltage	$I_{IN} = -12 mA$				-1.5	V
$I_{CC}$	Power Supply Current	No Load	$V_{CC}$		40	65	mA
		D1 Enabled or Disabled	$V_{EE}$		-5	-15	mA

## Switching Characteristics (Notes 4, 5)

Over Supply Voltage and Operating Temperature Ranges, unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
<b>DIFFERENTIAL DRIVER CHARACTERISTICS</b>							
$t_{PHLD}$	Differential Propagation Delay High to Low	$R_L = 100\Omega$ , $C_L = 500 pF$ , (Figures 3, 4) $C_1 = C_2 = 50 pF$	70	134	350	ns	
$t_{PLHD}$	Differential Propagation Delay Low to High		70	141	350	ns	
$t_{SKD}$	Differential Skew $ t_{PHLD} - t_{PLHD} $				7	50	ns
$t_r$	Rise Time			50	140	300	ns
$t_f$	Fall Time			50	140	300	ns
$t_{PHZ}$	Disable Time High to Z	$R_L = 100\Omega$ , $C_L = 500 pF$ (Figures 7, 8)		300	600	ns	
$t_{PLZ}$	Disable Time Low to Z			300	600	ns	
$t_{PZH}$	Enable Time Z to High			160	350	ns	
$t_{PZL}$	Enable Time Z to Low			160	350	ns	
<b>SINGLE ENDED DRIVER CHARACTERISTICS</b>							
$t_{PHL}$	Propagation Delay High to Low	$R_L = 450\Omega$ , $C_L = 500 pF$ (Figures 5, 6)	70	120	350	ns	
$t_{PLH}$	Propagation Delay Low to High		70	150	350	ns	
$t_{SK}$	Skew, $ t_{PHL} - t_{PLH} $				30	70	ns
$t_r$	Rise Time			50	100	300	ns
$t_f$	Fall Time			20	50	300	ns
<b>RECEIVER CHARACTERISTICS</b>							
$t_{PHL}$	Propagation Delay High to Low	$C_L = 15 pF$ (Figures 9, 10)	10	33	75	ns	
$t_{PLH}$	Propagation Delay Low to High		10	30	75	ns	
$t_{SK}$	Skew, $ t_{PHL} - t_{PLH} $			3	20	ns	

# Switching Characteristics (Notes 4, 5) (Continued)

Over Supply Voltage and Operating Temperature Ranges, unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>RECEIVER CHARACTERISTICS</b>						
$t_{HZ}$	Disable Time High to Z	$C_L = 15 \text{ pF}$ (Figures 9, 11)		20	75	ns
$t_{LZ}$	Disable Time Low to Z			20	75	ns
$t_{ZH}$	Enable Time Z to High			20	75	ns
$t_{ZL}$	Enable Time Z to Low			20	75	ns

**Note 1:** Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The table of Electrical Characteristics specifies conditions of device operation.

**Note 2:** Current into device pins is defined as positive. Current out of device pins is defined as negative. All voltages are referenced to ground except  $V_{OD}$ ,  $V_{OD1}$ ,  $V_{OD2}$ , and  $V_{SS}$ .

**Note 3:** All typicals are given for:  $V_{CC} = +5.0V$ ,  $V_{EE} = -5.0V$ ,  $T_A = +25^\circ C$  unless otherwise specified.

## Driver (D1)

Inputs		Outputs	
$\overline{D_{EN1}}$	$D_{IN1}$	$D_{OUT1+}$	$D_{OUT1-}$
H	X	Z	Z
L	L	L	H
L	H	H	L

## Driver (D2)

Input	Output
$D_{IN2}$	$D_{OUT2-}$
L	H
H	L

## Receiver (1)

RE	$\overline{RE}$	Input	Output
		$R_{IN1-}$	$R_{OUT1}$
0	1	X	Z
Any Other Combination		$\leq -200 \text{ mV}$	H
		$\geq +200 \text{ mV}$	L
		Open <sup>†</sup>	H

## Receiver (2)

RE	$\overline{RE}$	Inputs	Output
		$R_{IN2+}-R_{IN2-}$	$R_{OUT2}$
0	1	X	Z
Any Other Combination		$\leq -200 \text{ mV}$	L
		$\geq +200 \text{ mV}$	H
		Open <sup>†</sup>	H

## Receiver (3)

RE	$\overline{RE}$	Input	Output
		$R_{IN3+}$	$R_{OUT3}$
0	1	X	Z
Any Other Combination		$\leq -200 \text{ mV}$	L
		$\geq +200 \text{ mV}$	H
		Open <sup>†</sup>	H

H = Logic High Level (Steady State)  
 L = Logic Low Level (Steady State)  
 X = Irrelevant (Any Input)  
 Z = Off State (TRI-STATE, High Impedance)  
<sup>†</sup>OPEN = Non-Terminated

## Parameter Measurement Information

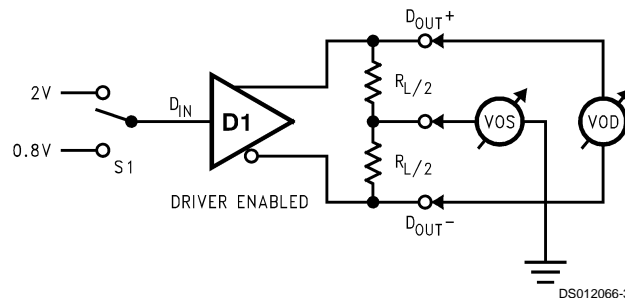


FIGURE 1. Differential Driver DC Test Circuit

Parameter Measurement Information (Continued)

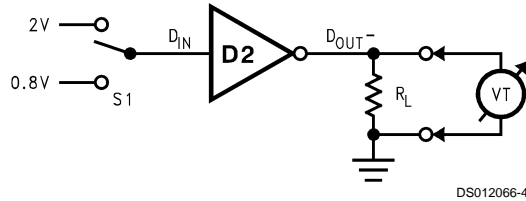


FIGURE 2. Single Ended Driver DC Test Circuit

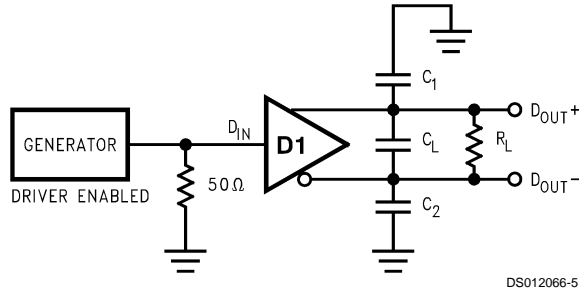


FIGURE 3. Differential Driver Propagation Delay and Transition Time Test Circuit

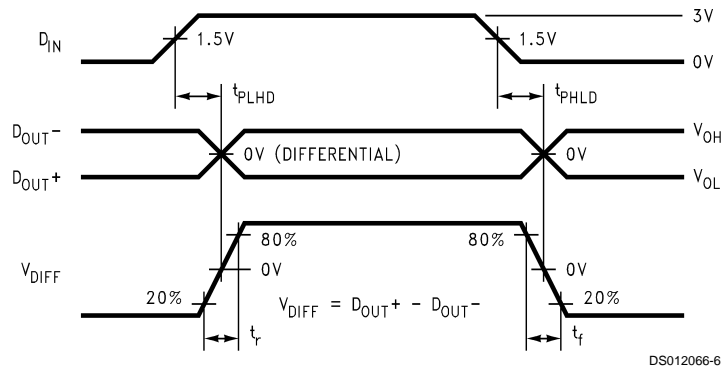


FIGURE 4. Differential Driver Propagation Delay and Transition Time Waveforms

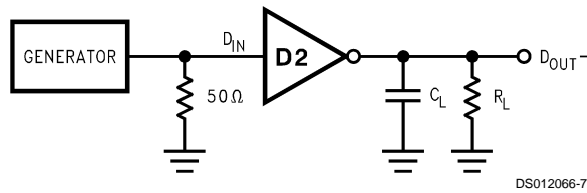


FIGURE 5. Single Ended Driver Propagation Delay and Transition Time Test Circuit

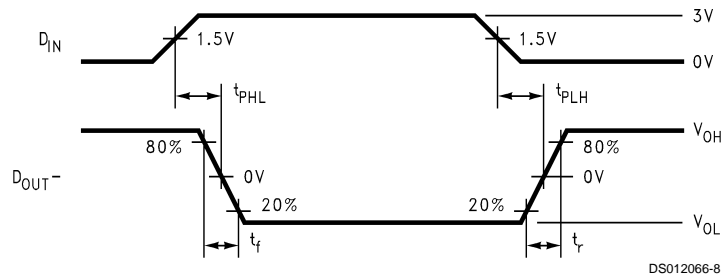


FIGURE 6. Single Ended Driver Propagation Delay and Transition Time Waveform

Parameter Measurement Information (Continued)

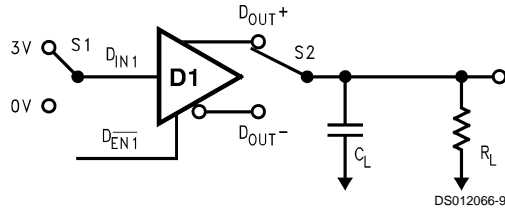


FIGURE 7. Differential Driver TRI-STATE Test Circuit

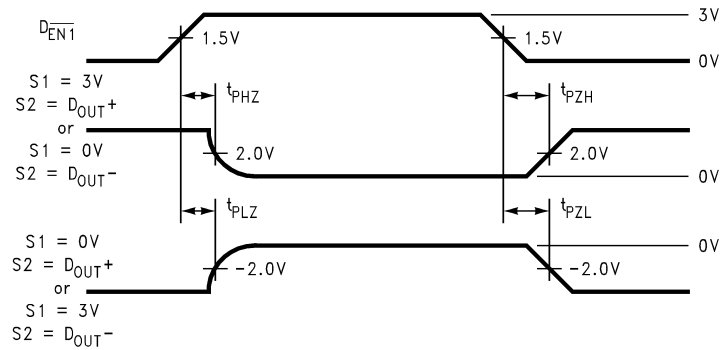


FIGURE 8. Differential Driver TRI-STATE Waveforms

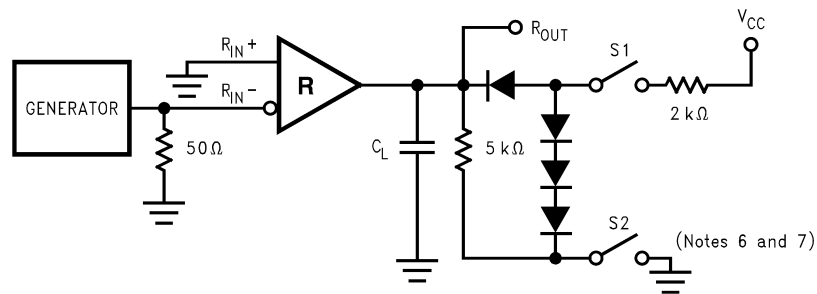


FIGURE 9. Receiver Propagation Delay Test Circuit

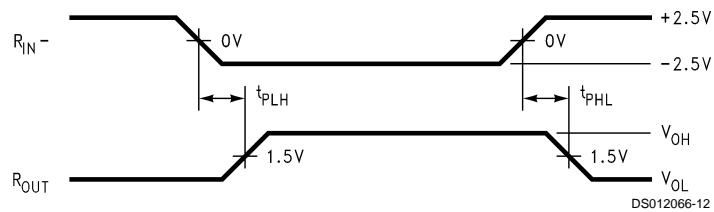


FIGURE 10. Receiver Propagation Delay Waveform

## Parameter Measurement Information (Continued)

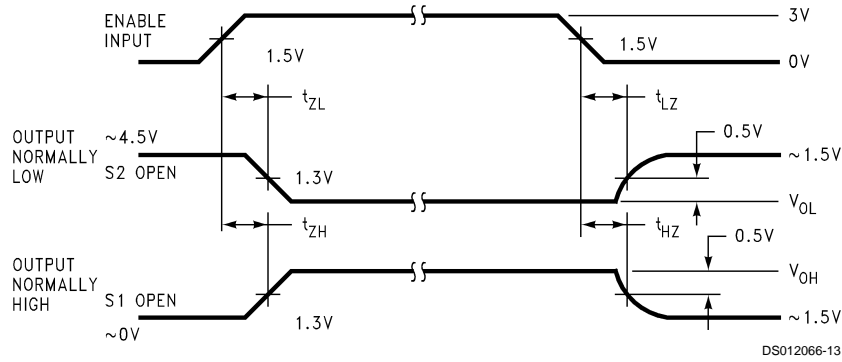


FIGURE 11. Receiver TRI-STATE Delay Waveform

**Note 4:** Generator waveform for all tests unless otherwise specified:  $f = 500 \text{ kHz}$ ,  $Z_O = 50\Omega$ ,  $t_r \leq 10 \text{ ns}$ ,  $t_f \leq 10 \text{ ns}$ .

**Note 5:**  $C_L$  includes probe and jig capacitance.

**Note 6:** All diodes are 1N916 or equivalent.

**Note 7:** S1 and S2 closed except where shown.

**Note 8:** ESD Rating HBM (1.5 k $\Omega$ , 100 pF) pins 14, 16  $\geq 1500\text{V}$ , all other pins  $\geq 2000\text{V}$ .

## Typical Application Information

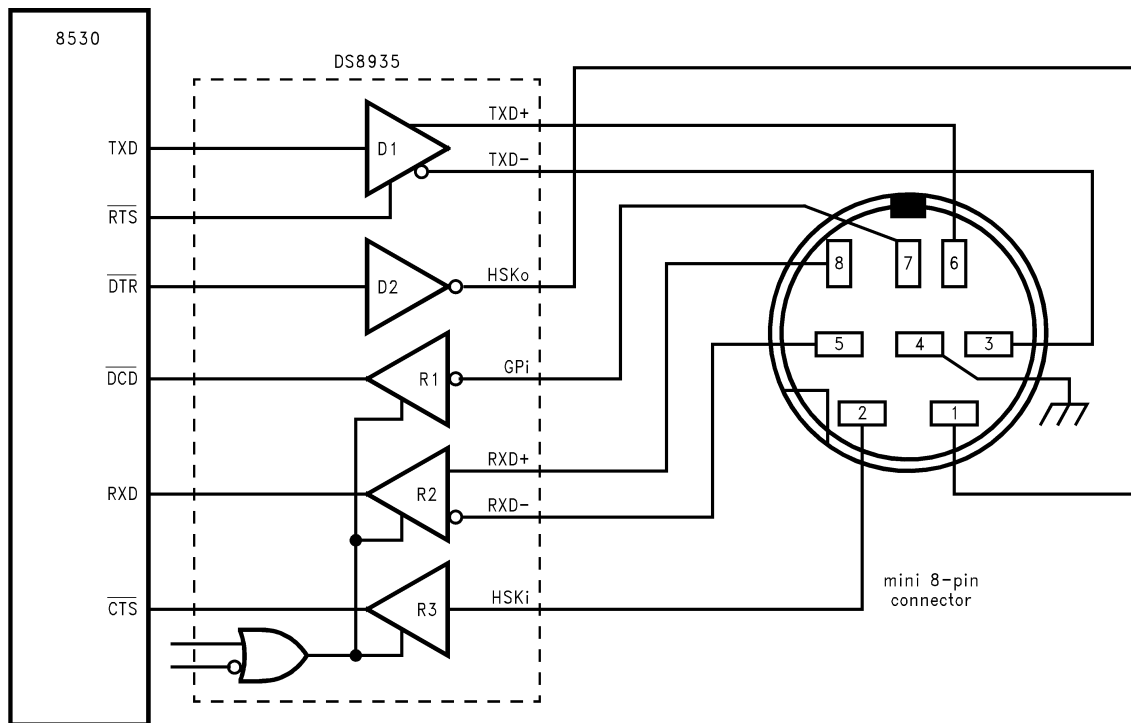


FIGURE 12. Typical LocalTalk Application



Typical Application Information (Continued)

TABLE 1. Device Pin Descriptions

Pin#	Name	Description
2, 4	D <sub>IN</sub>	TTL Driver Input Pins
3	D <sub>EN1</sub>	Active Low Driver Enable Pin. A High on this Pin TRI-STATEs the Driver Outputs (D1 Only)
19	D <sub>OUT+</sub>	Non-Inverting Driver Output Pin
17, 18	D <sub>OUT-</sub>	Inverting Driver Output Pin
13, 15	R <sub>IN+</sub>	Non-Inverting Receiver Input Pin
16, 14	R <sub>IN-</sub>	Inverting Receiver Input Pin
5, 6, 7	R <sub>OUT</sub>	Receiver Output Pin
9	R <sub>EN</sub>	Active Low Receiver Enable
12	R <sub>EN</sub>	Active High Receiver Enable
10, 11	N/C	Not Connected
8	GND	Ground Pin
1	V <sub>EE</sub>	Negative Power Supply Pin, -5V ±5%
20	V <sub>CC</sub>	Positive Power Supply Pin, +5V ±5%

DRIVER OUTPUT WAVEFORMS

The driver configuration on the DS8935 is unique among TIA/EIA-422 devices in that it utilizes -5V V<sub>EE</sub> supply. A typical TIA/EIA-422 driver uses +5V only and generates signal swings of approximately 0V-5V.

By utilizing V<sub>EE</sub>, the differential driver is able to generate a much larger differential signal. The typical output voltage is about |4| V, which gives |8| V differentially, thus providing a

much greater noise margin than +5V drivers. See Figure 13. The receiver therefore has a range of +8V to -8V or V<sub>SS</sub> of 16V (V<sub>SS</sub> = V<sub>OD-</sub>-V<sub>OD+</sub>).

Each side of the differential driver operates similar to a TIA/EIA-423 driver. The output voltages are slightly different due to the loading: the differential driver has differential termination, the single-ended driver is terminated with a resistor to ground.

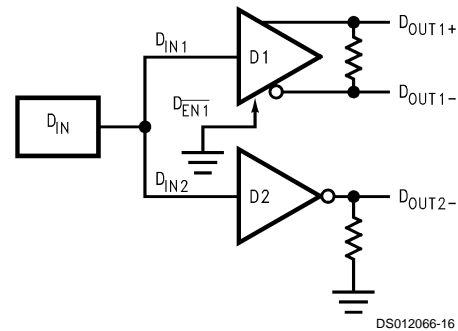
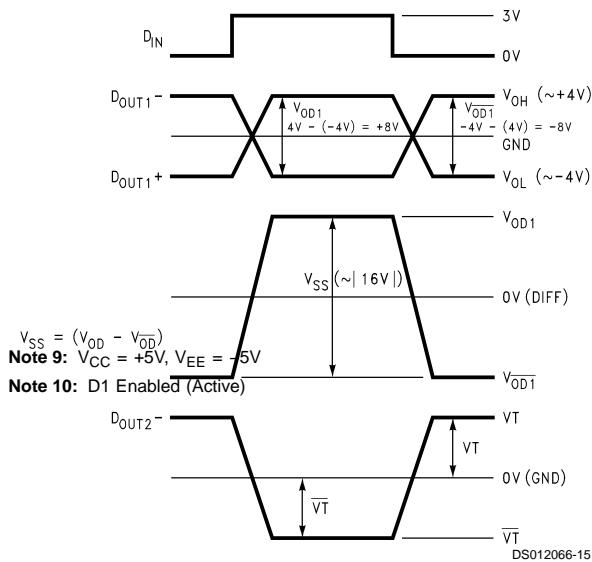


FIGURE 13. Typical Driver Output Waveforms

## Typical Application Information

(Continued)

### UNUSED PINS

Unused driver outputs should be left open. If tied to either ground or supply, the driver may enter an  $I_{OS}$  state and consume excessive power. Unused driver inputs should not be left floating as this may lead to unwanted switching which may affect  $I_{CC}$ , particularly the frequency component. Unused driver inputs should be tied to ground.

Receiver outputs will be in a HIGH state when inputs are open; therefore, outputs should not be tied to ground. It is best to leave unused receiver outputs floating.


### RECEIVER FAILSAFE

All three receivers on this device incorporate open input failsafe protection. The differential receiver output will be in a HIGH state when inputs are open, but will be indetermined if inputs are shorted together. Unused differential inputs should be left floating.

Both single-ended receivers (inverting and non-inverting) are biased internally so that an open input will result in a HIGH output. Therefore, these inputs should not be shorted to ground when unused.

### BYPASS CAPACITORS

Bypass capacitors are recommended for both  $V_{CC}$  and  $V_{EE}$ . Noise induced on the supply lines can affect the signal quality of the output;  $V_{CC}$  affects the  $V_{OH}$  and  $V_{EE}$  affects the  $V_{OL}$ . Capacitors help reduce the effect on signal quality. A value of 0.1  $\mu\text{F}$  is typically used.

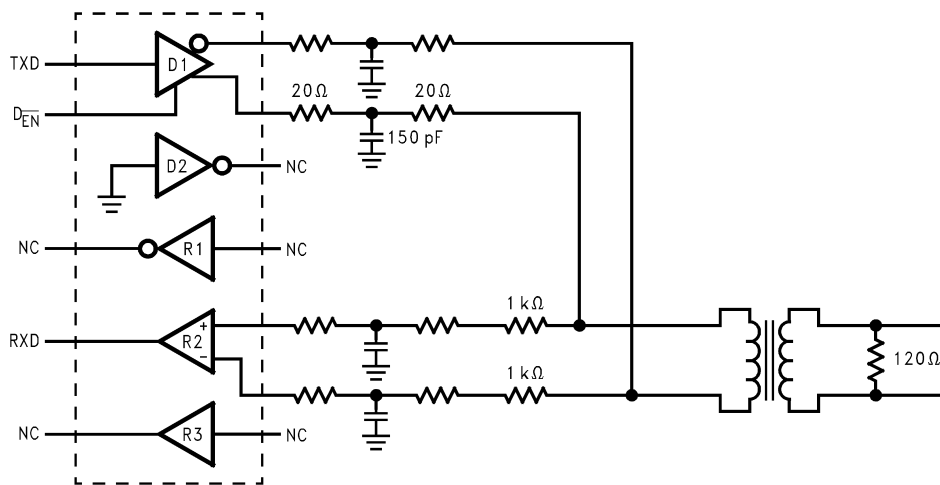

DS012066-17

FIGURE 14. Differential Communication, Transformer-Coupled to a Twisted-Pair Line

### SINGLE +5V SUPPLY

The DS8935 is derived from the DS3691/92 which could be configured using a single +5V supply ( $V_{EE} = 0\text{V}$ ). This device is not specified for this type of operation. However, the device will not be damaged if operated using a single +5V supply.

Both drivers require the  $-5\text{V}$  supply in order to meet the output voltage levels specified. When the device switches from a positive voltage to the complimentary state, it is pulled toward the  $V_{EE}$  level. If that level is 0V, then the complimen-

ary state will be near 0V instead of  $V_{EE}$ . Thus, the output would switch from about 4V to 0V, instead of 4V to  $-4\text{V}$ . The differential driver will meet TIA/EIA-422, but with a reduced noise margin. The single-ended driver will not meet TIA/EIA-423 without the  $-5\text{V}$  supply.

### TERMINATION

On a multi-point transmission line which is electrically long, it is advisable to terminate the line at both ends with its characteristic impedance to prevent signal reflection and its associated noise/crosstalk.


A 100 $\Omega$  termination resistor is commonly specified by TIA/EIA-422 for differential signals. The DS8935 is also specified using 140 $\Omega$  termination which will result in less power associated with the driver output. The additional resistance is typical of applications requiring EMI filtering on the driver outputs.

### TWO-WIRE LocalTalk


The DS8935 is a single chip solution for a LocalTalk interface. A typical application is shown in Figure 12.

An alternative implementation of LocalTalk is to only use two wires to communicate. The differential data lines can be transformer-coupled on to a twisted pair medium. See Figure 14. The handshake function must then be accomplished in software.

## Typical Application Information (Continued)

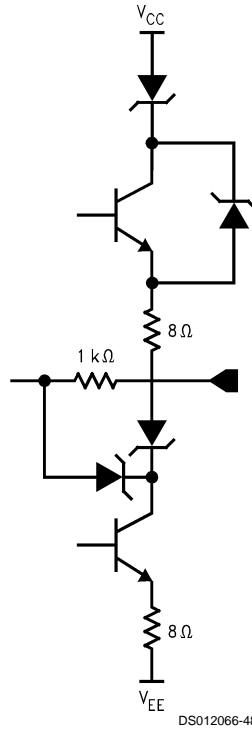

**FIGURE 15. Driver Output Structure**

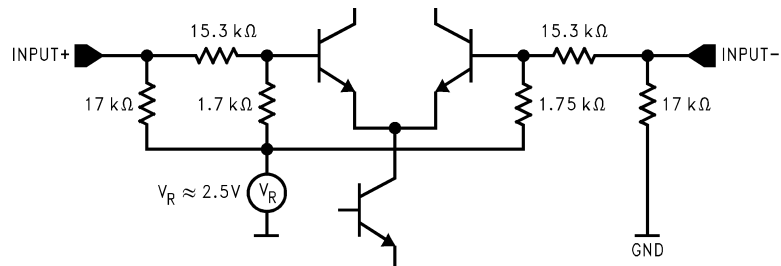


**FIGURE 16. Receiver Input Structure**

## Typical Performance Characteristics

The DS8935 is very closely related to the DS8925. Please refer to the DS8925 datasheet for the typical performance characteristics.

**Physical Dimensions** inches (millimeters) unless otherwise noted

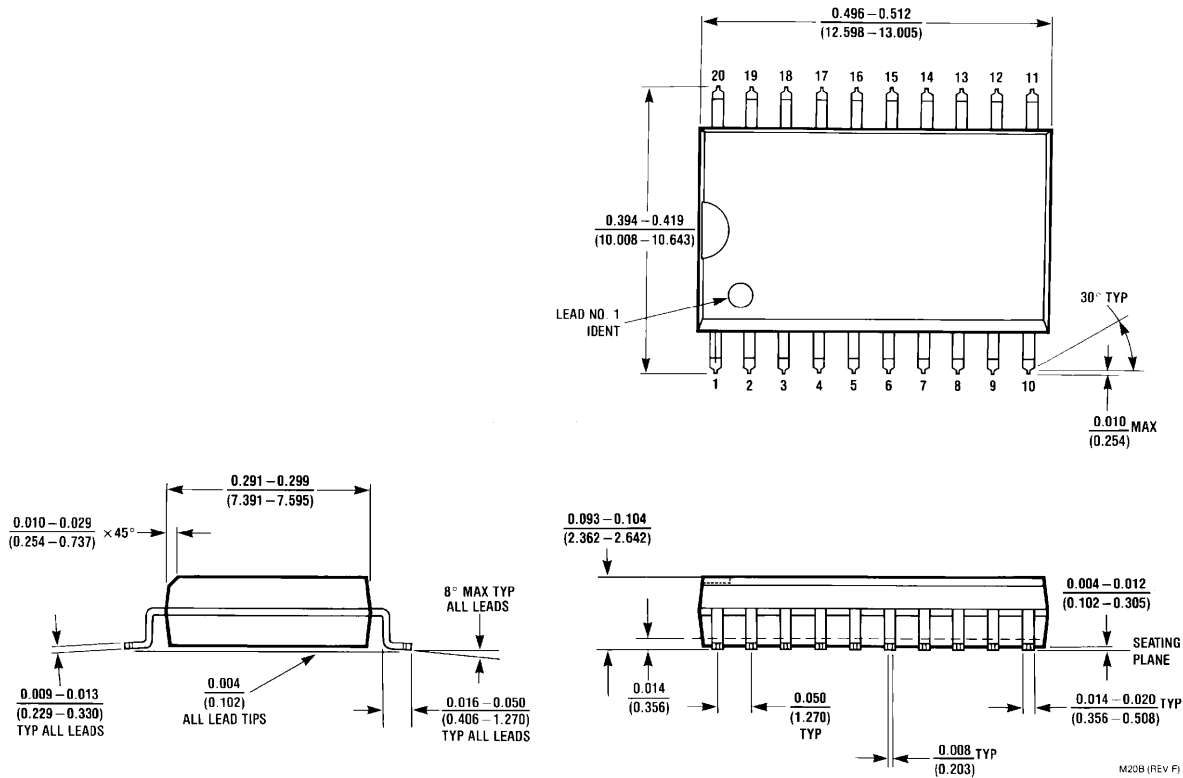

**20-Lead (0.300" Wide) Molded Small Outline Package, JEDEC**  
**Order Number DS8935WM**  
**NS Package Number M20B**

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
Americas  
Email: support@nsc.com

**National Semiconductor Europe**  
Fax: +49 (0) 180-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 69 9508 6208  
English Tel: +44 (0) 870 24 0 2171  
Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor Asia Pacific Customer Response Group**  
Tel: 65-2544466  
Fax: 65-2504466  
Email: ap.support@nsc.com

**National Semiconductor Japan Ltd.**  
Tel: 81-3-5639-7560  
Fax: 81-3-5639-7507

www.national.com

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Transportation and Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated