

CLC503

CLC503 180 MHz Differential - Output Amplifier



Literature Number: SNOS839A

Comlinear CLC503 180MHz, Differential-Output Amplifier

General Description

The Comlinear CLC503 is a single-ended to differential amplifier. It utilizes a pair of closed-loop transconductance amplifiers to provide wideband, high fidelity, differential output signals. Internal resistors set the differential gain to 2V/V. With a ground-centered $2V_{pp}$ input signal, the CLC503 will produce a $4V_{pp}$ differential output signal. This differential output signal is centered around an adjustable common mode voltage. An independent input controls the common mode output voltage. The CLC503 has harmonic distortion products of -77dBc or less, and a signal to noise ratio of 72dB. The output stage is optimized for loads with signal ranges between +0.7 and +3.9 volts, such as those found on single supply CMOS ADCs. Overdrive recovery time of the CLC503 and following circuitry is optimized by the output limiting of the CLC503. The power down pin (P_{DN}) allows for power savings in applications where unused circuitry is placed in a low power mode.


The CLC503 is an ideal amplifier to drive the differential inputs of the Comlinear CLC949, 12-bit, 20MSPS, analog-to-digital converter. It is tailored for driving single supply, differential input, analog-to-digital converters which require fast settling, high fidelity inputs.

Features


- -77dBc distortion (10MHz, $4V_{pp}$)
- 72dB SNR ($4V_{pp}$)
- 15ns settling (0.1%)
- 180MHz bandwidth

Applications


- Single-to-differential conversion
- Single supply ADC signal conditioner

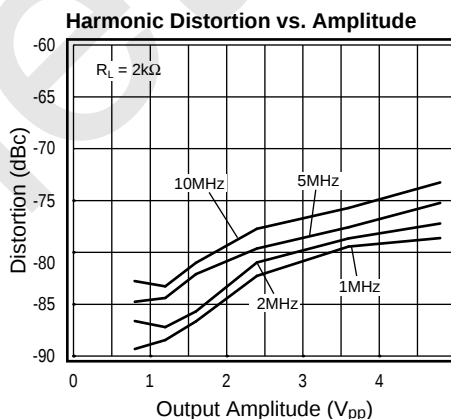

Typical Application Diagram

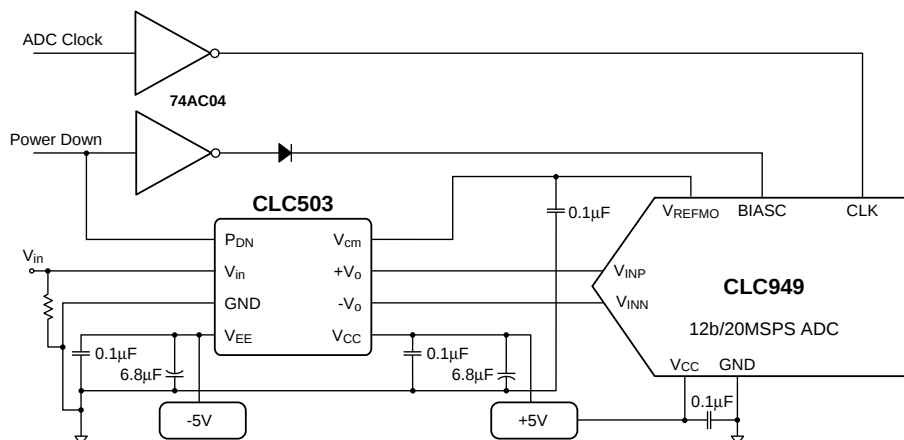

Pinout SOIC



Electrical Characteristics ($V_{CC} = +5V$, $V_{EE} = -5V$, $V_{cm} = 2.25V$, $C_L = 5pF$, $V_o = 4V_{pp}$ unless specified)

PARAMETERS	CONDITIONS	TYP	MIN/MAX RATINGS		UNITS	NOTES
Ambient Temperature	CLC503	+25°C	+25°C	-40 to 85°C		
FREQUENCY DOMAIN RESPONSE						
Differential Amp						
large signal bandwidth	$V_o < 4.0V_{pp}$	180	80	70	MHz	
gain flatness	DC to 10MHz	0.3	0.5	0.5	dB	
Common-Mode Amp						
-3dB bandwidth	$V_o < 4.0V_{pp}$	15	10	10	MHz	
TIME DOMAIN RESPONSE						
Differential Amp						
rise and fall time	2V step	2.1	2.5	3.0	ns	
settling time to 0.1%	2V step	15	22	25	ns	
overshoot	2V step	0			%	
slew rate	2V step	800	500	500	V/ μ s	
Common-Mode Amp						
recovery from power down	0.1% output settling	40	100	100	ns	
DISTORTION AND NOISE RESPONSE						
2 nd harmonic distortion	$4V_{pp}$, 1MHz	-78	-74	-70	dBc	B
	$4V_{pp}$, 10MHz	-75	-71	-71	dBc	B
3 rd harmonic distortion	$4V_{pp}$, 1MHz	-85	-80	-79	dBc	B
	$4V_{pp}$, 10MHz	-77	-72	-72	dBc	B
SNR	$4V_{pp}$	72	71	70	dB	
integrated output noise voltage	$R_s = 50\Omega$ 10kHz – 500MHz	325	380	460	μV_{rms}	
STATIC DC PERFORMANCE						
Differential Amp						
gain	$V_o(Diff)/V_{in}$	2	1.75 - 2.25	1.75 - 2.25	V/V	A
output offset voltage	$V_{in} = 0$	10	90	100	mV	A
INL		0.015	0.03	0.05	%	A
R_{in}		2	1.6 - 2.4	1.6 - 2.4	k Ω	
Common-Mode Amp						
gain	V_{ocm}/V_{cm}	0.97	0.9 - 1.1	0.9 - 1.1	V/V	
output offset voltage		100	200	200	mV	A
R_{in}		10	5	5	M Ω	
input voltage range		1.5 - 3.5			V	
power supply rejection ratio	DC	50	30	30	dB	A
supply current	$R_L = \infty$	25	30	30	mA	A
supply current, power down		4.5	6	6	mA	A
MISCELLANEOUS PERFORMANCE						
power down input	CMOS levels	0.5 - 4.8			V	C
V_{IL}	on	1			V	
V_{IH}	off	4.5			V	C
power down dissipation	$P_{DN} = "Hi"$	45	60	60	mW	A
output voltage range	single output	0.7 - 3.9	0.85 - 3.7	0.9 - 3.5	V	
differential output resistance		500	400 - 600	375 - 625	Ω	

Min/max ratings are based on product characterization and simulation. Individual parameters are tested as noted. Outgoing quality levels are determined from tested parameters.

Absolute Maximum Ratings

supply voltage	$\pm 6V$
maximum input range	$\pm 6V$
maximum output range ($\pm V$)	0 to V_{CC}
maximum operating temperature range	-40°C to +85°C
maximum junction temperature	+175°C
maximum storage temperature range	-65°C to +150°C
maximum lead temperature (soldering 10 sec)	+300°C
ESD rating (human body model)	500V

Recommended Operating Conditions

supply voltage	± 4.5 to $\pm 5.5V_{dc}$
input voltage	$\pm 1V$
output voltage	+0.8 to +3.75V
ambient temperature range	-40°C to +85°C

Notes

- A) J-level: spec is 100% tested at +25°C, sample tested at +85°C.
 LC/MC-level: spec is 100% wafer probed at +25°C.
 B) J-level: spec is sample tested at +25°C.
 C) **POWER DOWN** must be 1V higher than V_{cm} .

Ordering Information


Model	Temperature Range	Description
CLC503AJE	-40°C to +85°C	8-pin SOIC

Package Thermal Resistance


Package	θ_{JC}	θ_{JA}
SOIC (AJE)	65°C/W	90°C/W

Typical Performance Characteristics ($V_{CC} = +5V$, $V_{EE} = -5V$, $V_{cm} = 2.25V$, $C_L = 5pF$, $V_o = 4V_{pp}$ unless specified)


Frequency Response vs. R_L

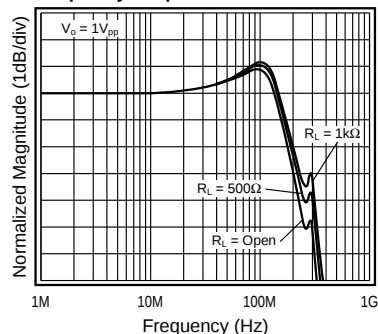


Frequency Response vs. V_o

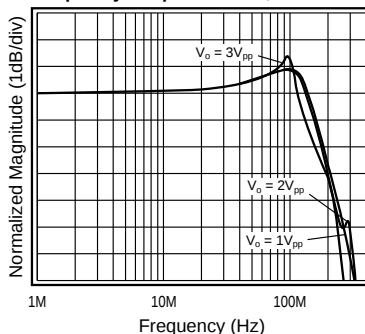


SNR and SFDR

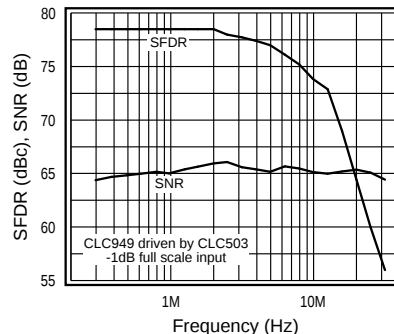


2nd Harmonic Distortion vs. Frequency

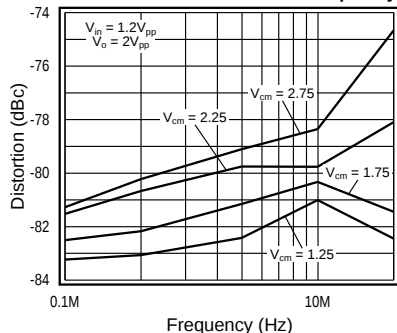


3rd Harmonic Distortion vs. Frequency

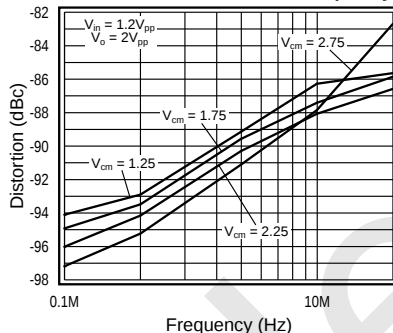


2nd Harmonic Distortion vs. Amplitude

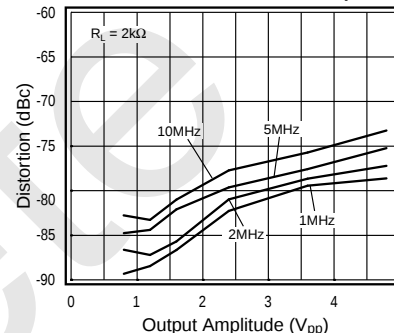


3rd Harmonic Distortion vs. Amplitude

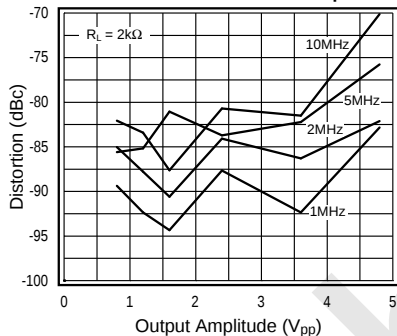


Pulse Response CLC949 Driven By CLC503

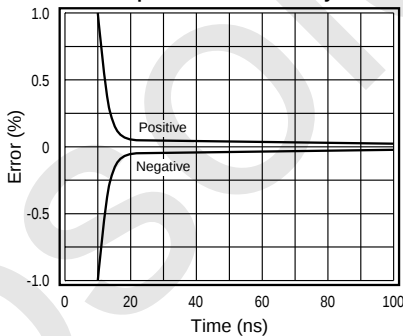


Settling Time vs. Capacitive Load

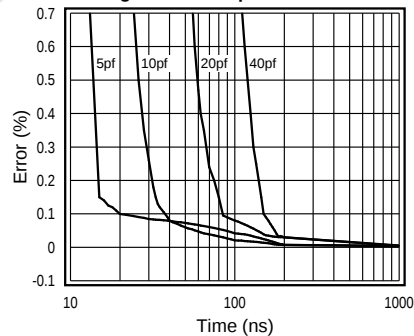


Equivalent Input Noise

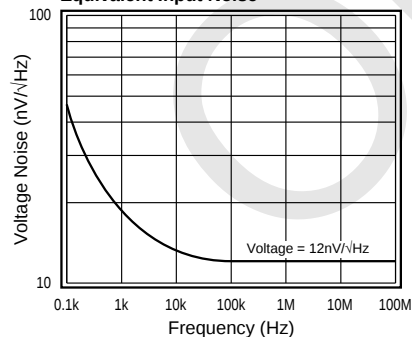


I_B , V_{IO} , vs. Temperature

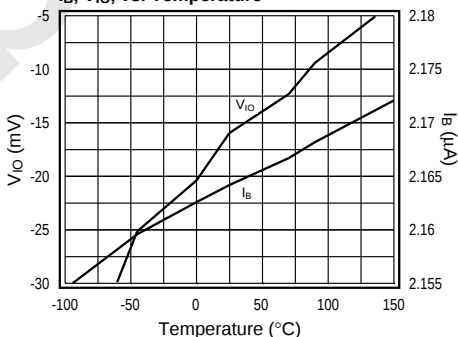

Power Down (P_{DN}) Response

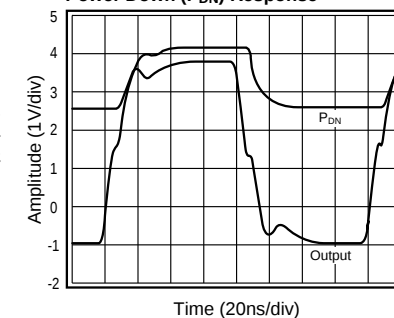

CLC949 Output When Driven By CLC503

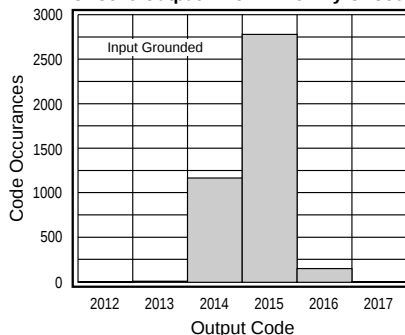

CLC503 APPLICATIONS

APPLICATION CONSIDERATIONS

Theory of Operation

Figure 1 is a simplified schematic of the CLC503.

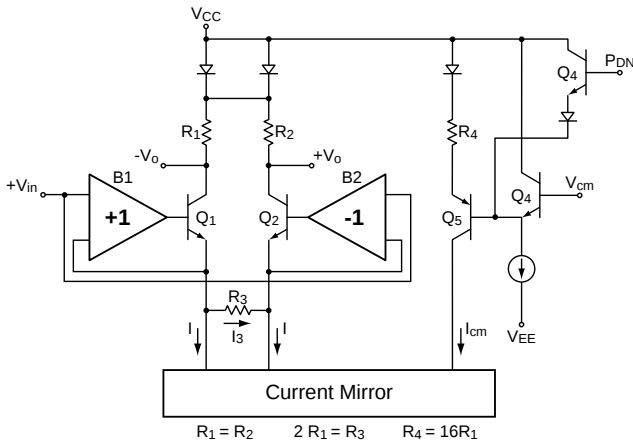


Figure 1: Simplified Block Diagram

The input voltage drives a unity gain buffer, B₁, and an inverting buffer, B₂. These buffers drive emitter followers, Q₁ and Q₂. Resistor, R₃, is the gain set resistor. The combination of B₁, B₂, Q₁, Q₂ and R₃ form a transconductance stage. The input voltage across R₃ is converted to an in-phase and out-of-phase current through the collectors of Q₁ and Q₂. The current through R₃ is:

$$I_3 = \frac{2V_{in}}{R_3}$$

$$V_{odiff} = I_3 R_1 + I_3 R_2 \quad R_1 = R_2$$

$$V_{odiff} = I_3 (2R_1)$$

$$V_{odiff} = \frac{2V_{in}}{R_3} (2R_1) \quad 2R_1 = R_3$$

$$V_{odiff} = 2V_{in}$$

The common mode voltage across R₄ is converted to a current. Transistor Q₅ has a collector current equal to:

$$I_{cm} \approx \frac{V_{CC} - V_{cm} - V_{diode}}{R_4} \quad R_4 = 16R_1$$

The common mode current is scaled and mirrored back to Q₁ and Q₂. These currents, I, are converted back to a voltage at the collector load resistors, R₁ and R₂. This forms the common-mode output voltage.

$$I = \frac{V_{CC} - V_{cm} - V_{diode}}{R_1}$$

$$V_{ocm} = V_{CC} - V_{diode} - R_1 I$$

$$I = 16I_{cm}$$

$$V_{ocm} = V_{cm}$$

Figure 2 depicts the differential output voltage limits of the CLC503.

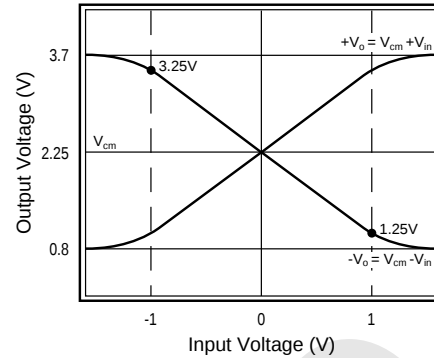


Figure 2: Differential Output Voltage

Centered around V_{cm}, the outputs are derived from the following equations.

$$+V_o = V_{cm} + V_{in}$$

$$-V_o = V_{cm} - V_{in}$$

$$V_{odiff} = +V_o - (-V_o) = 2V_{in}$$

The input to output relationship is shown in Figure 3.

V _{in}	V _{odiff}
±1V	±2V
2V _{pp}	4V _{pp}
±1.4V max	±2.8V max

Figure 3: Input vs. Output Relationship

Pulling the power down line (P_{DN}) high decreases the quiescent supply current. This turns off the current flowing in Q₅, and therefore Q₁ and Q₂, allowing the output voltages to drift high, to approximately 4.3V. Since the signal is not significantly attenuated, P_{DN} does not effectively isolate the input from the output. This part is not recommended for use as a multiplexer. Refer to **Pin Descriptions - Power Down pin** - section. No damage occurs to the device when P_{DN} is high and the input is driven to the supply voltage.

Pin Descriptions

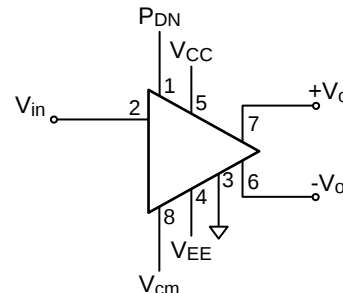


Figure 4: CLC503 Functional Pin Descriptions

■ Pin 1

Power Down (P_{DN}): The power down pin takes CMOS input levels. Use this to decrease the power from 250mW to 40mW. This is not a signal disable pin. A CMOS gate will drive this input. The quiescent supply current will be decreased when P_{DN} is at least 1V higher than V_{cm} . When the current is turned off, the output voltage V_o , will go to approximately 4.3V. An internal pull down resistor of 10k allows P_{DN} to be left open when not used.

■ Pin 2

Input Voltage (V_{in}): This is the signal input. The recommended input range is $\pm 1V$. The linear operating range is approximately $\pm 1.4V$. This input controls the differential output voltage. Because of the closed loop nature of the transconductance stage, the transfer function is highly linear. Refer to **Output Voltage** pin for output signal limitations.

■ Pin 3

Ground (GND): Tie to low impedance analog ground.

■ Pins 4 and 5

Power Supplies (V_{EE} and V_{CC}): For optimum performance, use linear $\pm 5V$ power supplies. Use bypass capacitors of 0.1 μF and 6.8 μF on the power supply lines to decrease any noise that could be injected into the circuit by the power supplies. Place the bypass capacitors as close to the device pins as possible. Remove the ground plane from the board underneath the device to eliminate parasitic capacitance. Refer to **Printed Circuit Board Layout** section for more layout suggestions.

■ Pins 6 and 7

Output Voltage ($-V_o$ and $+V_o$): These are the differential signal output pins. The output voltage at these pins is limited to 0.7V to 3.9V. The output recovery time after exceeding these limits is approximately 40ns. The output voltage can be defined as:

$$\begin{aligned} +V_o &= V_{cm} + V_{in} \\ -V_o &= V_{cm} - V_{in} \\ V_{odiff} &= +V_o - (-V_o) = 2V_{in} \\ V_{ocm} &= \frac{+V_o - (-V_o)}{2} = V_{cm} \end{aligned}$$

■ Pin 8

Common-Mode Voltage (V_{cm}): This input sets the common-mode output operating points. The common mode input voltage can range from 1.5V to 3.5V. Refer to **Output Voltage** pin discussion for limitations on the output range.

Design Information

Load: The CLC503 is intended to drive high speed CMOS analog-to-digital converters, such as the CLC949. Resistive loading will affect the gain and common mode offset. It is not recommended to drive resistive loads below 10k Ω with this part. See Figure 5 for gain vs. load with specified range in device output resistance.

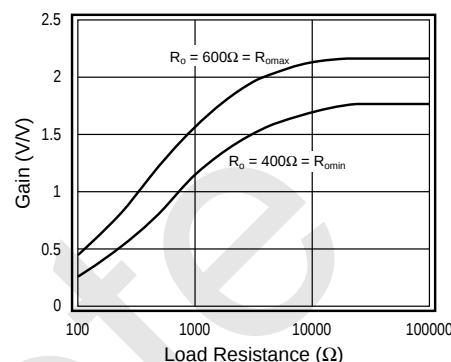


Figure 5: Gain vs. Resistive Load

Settling Time: The CLC503 settles to 0.1% in 15ns with a 5pF load, the input capacitance of the CLC949. Refer to the **Settling Time vs. Capacitive Load** plot in the **Typical Performance Characteristics** section.

Power Dissipation

To calculate the power dissipation, P_T , for the CLC503, use the following equation:

$$P_T = I_{CC} (V_{CC} - V_{EE})$$

Printed Circuit Board Layout

The performance of the CLC503 is strongly dependent on proper layout, and adequate power supply decoupling. The parasitic capacitance at the output of the CLC503 and the input to the CLC949, or any other analog-to-digital converter, must be kept to a minimum. Consider the following guidelines:

- Use a ground plane.
- Bypass power supply pins with monolithic capacitors of 0.1 μF and with 6.8 μF tantalum capacitors. Place the capacitors less than 0.1" (3mm) from the pin.
- Remove the ground plane underneath the device and 0.1" (3mm) from all input/output pads.

Interfacing the CLC503 with the CLC949

The CLC503 can be easily interfaced with the CLC949 as shown in Figure 6. An evaluation board is available for proto-typing and measurements.

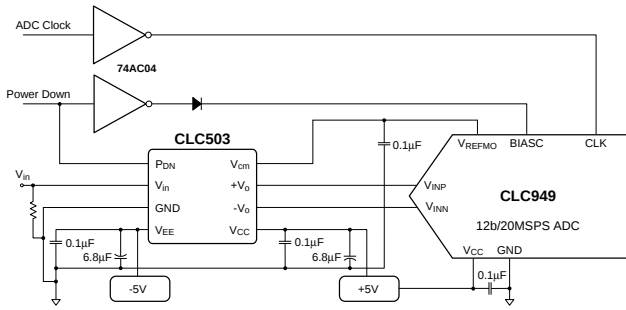


Figure 6: Interfacing the CLC503 with the CLC949

Extended Use Considerations

Designed to drive the CLC949, the CLC503 can be used with other analog-to-digital converters. The user will want to consider the following parameters of the device that the CLC503 will drive.

- Input impedance of the A/D. Refer to Figure 5 for the Gain vs. Resistive Load. The CLC503 operates best when driving resistive loads greater than 10kΩ and capacitive loads of less than 10pF.
- Resistive loading will affect the gain and common mode offset. The gain setting resistors are fixed internally. The voltage gain equation is:

$$A_{V_{new}} = A_{V_{old}} \left(\frac{500\Omega \parallel R_L}{500\Omega} \right)$$
- Other considerations
 - Output signal swing must be within the specified output range.
 - Common mode range must meet the specified common mode range.
 - Distortion will be affected when V_{in} and V_{cm} drive the output out of the linear operating range.

where R_L equals the input resistance of the A/D. The impact of lower values of R_L is shown in Figure 5. The tolerance on the 500Ω is ±20%.

- Capacitive loading will affect the settling time. The settling time equation is:

$$t_{settle} = R_s \cdot C_L \cdot \ln \left(\frac{100\%}{\%settling} \right)$$

where $R_s = 250\Omega \pm 15\%$ and $\%settling \geq 0.1\%$. Refer to the **Settling Time vs. Capacitive Load** plot in the **Typical Performance Characteristics** section.

Customer Design Applications Support

National Semiconductor is committed to design excellence. For sales, literature and technical support, call the National Semiconductor Customer Response Group at **1-800-272-9959** or fax **1-800-737-7018**.

Life Support Policy

National's products are not authorized for use as critical components in life support devices or systems without the express written approval of the president of National Semiconductor Corporation. As used herein:

1. Life support devices or systems are devices or systems which, a) are intended for surgical implant into the body, or b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
E-mail: europe.support@nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Francais Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block
Ocean Centre, 5 Canton Road
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated