

# TIL920, TIL921, TIL922, TIL920A, TIL921A, TIL922A TIL920B, TIL921B, TIL922B SINGLE/DUAL/QUAD CHANNEL OPTOCOUPLERS


SOOS032-D3908, FEBRUARY 1992

- AC Signal Input
- Gallium-Arsenide Diode Infrared Source
- Source Is Optically Coupled to Silicon N-P-N Phototransistor
- Choice of One, Two, or Four Channels
- Choice of Three Current-Transfer Ratios
- High-Voltage Electrical Isolation . . . 7.5 kV Peak (5.3 kV rms)
- Plastic Dual-In-Line Packages
- UL Listed – File No. E65085

## description

These optocouplers consist of two gallium-arsenide light-emitting diodes connected in a reverse-parallel configuration for ac-input applications and a silicon n-p-n phototransistor per channel. The TIL920 has one channel in a 4-pin package, the TIL921 has two channels in an 8-pin package, and the TIL922 has four channels in a 16-pin package. The standard devices, TIL920, TIL921, and TIL922, are tested for a current-transfer ratio of 20% minimum. Devices selected for a current-transfer ratio of 50% and 100% minimum are designated with the suffix A and B respectively.

## mechanical data

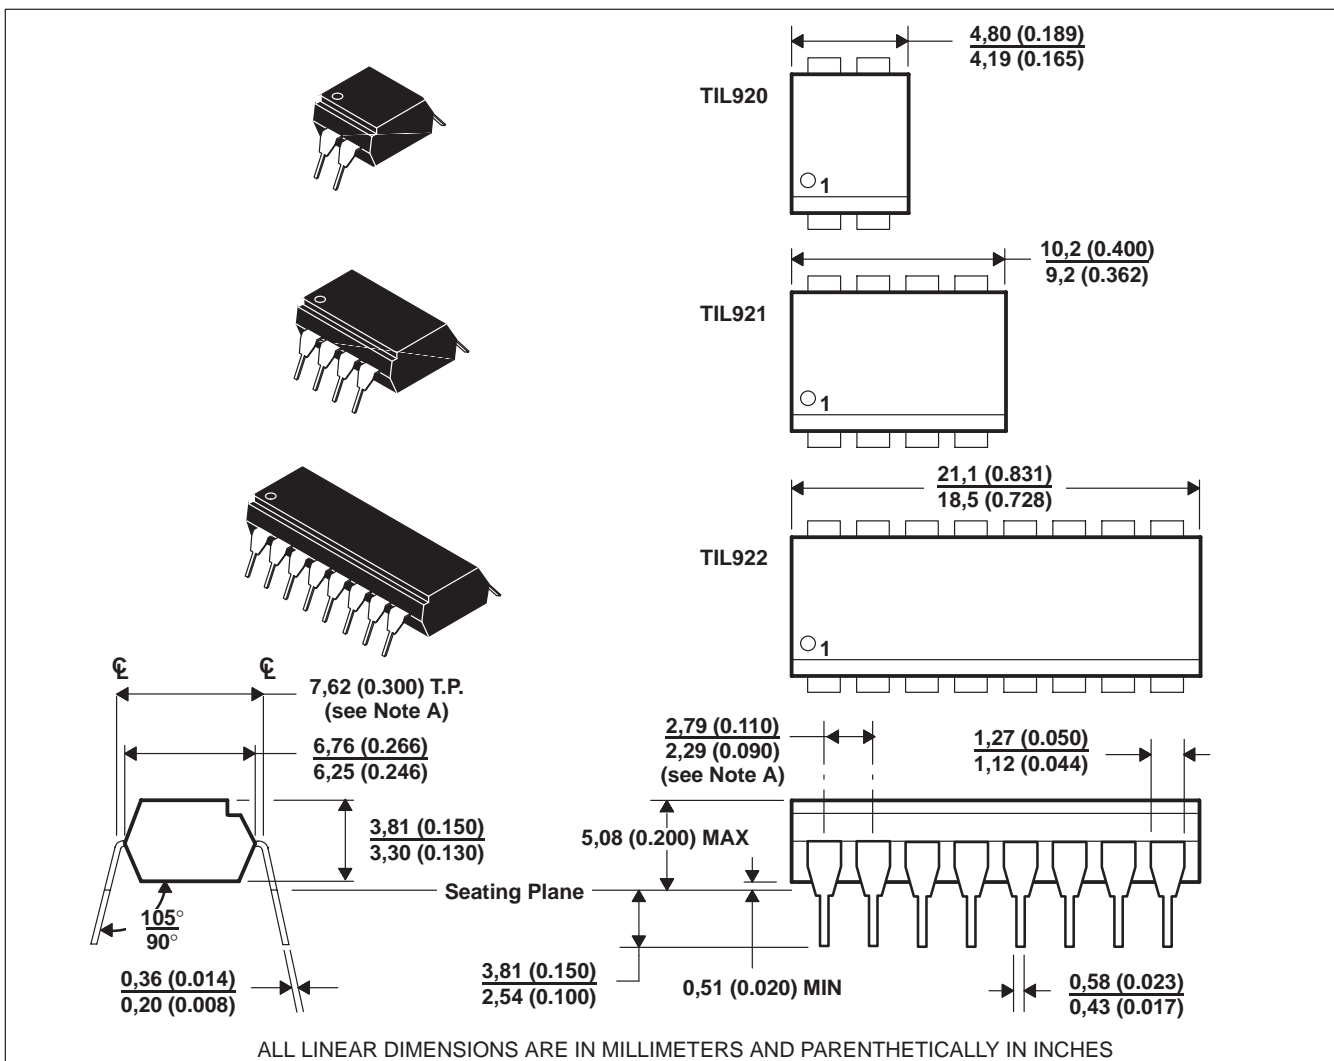

NOTE A: Each pin centerline is located 0,25 (0.010) of its true longitudinal position.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1992, Texas Instruments Incorporated

# TIL920, TIL921, TIL922, TIL920A, TIL921A, TIL922A TIL920B, TIL921B, TIL922B SINGLE/DUAL/QUAD CHANNEL OPTOCOUPPLERS

SOOS032-D3908, FEBRUARY 1992

## schematic diagrams

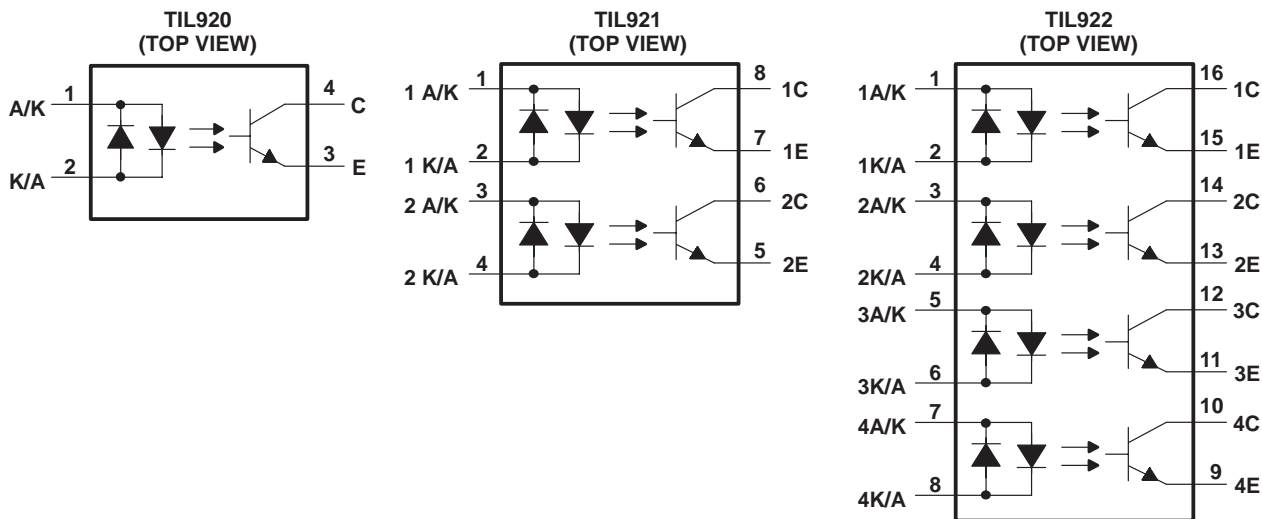

## absolute maximum ratings, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

Input-to-output voltage (see Note 1)	$\pm 7.5$ kV peak or dc ( $\pm 5.3$ kV rms)
Collector-emitter voltage (see Note 2)	35 V
Emitter-collector voltage	7 V
Input diode continuous forward current at (or below) $25^\circ\text{C}$ free-air temperature (see Note 3)	$\pm 50$ mA
Continuous power dissipation at (or below) $25^\circ\text{C}$ free-air temperature:	
Phototransistor (see Note 4)	150 mW
Input diode plus phototransistor per channel (see Note 5)	200 mW
Operating free-air temperature range, $T_A$	$-55^\circ\text{C}$ to $100^\circ\text{C}$
Storage temperature range	$-55^\circ\text{C}$ to $125^\circ\text{C}$
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	$260^\circ\text{C}$

- NOTES: 1. This rating applies for sine-wave operation at 50 or 60 Hz. Service capability is verified by testing in accordance with UL requirements.  
 2. This value applies when the base-emitter diode is open circuited.  
 3. Derate linearly to  $100^\circ\text{C}$  free-air temperature at the rate of  $0.67$  mA/ $^\circ\text{C}$ .  
 4. Derate linearly to  $100^\circ\text{C}$  free-air temperature at the rate of  $2$  mW/ $^\circ\text{C}$ .  
 5. Derate linearly to  $100^\circ\text{C}$  free-air temperature at the rate of  $2.67$  mW/ $^\circ\text{C}$ .

## electrical characteristics, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C = 0.5$ mA, $I_F = 0$	35			V
$V_{(BR)ECO}$	Emitter-collector breakdown voltage	$I_C = 100$ $\mu\text{A}$ , $I_F = 0$	7			V
$I_{C(off)}$	Off-state collector current	$V_{CE} = 24$ V, $I_F = 0$			100	nA
CTR $\dagger$	Current transfer ratio	$I_F = 5$ mA, $V_{CE} = 5$ V	TIL920, TIL921, TIL922		20%	
	TIL920A, TIL921A, TIL922A		50%			
	TIL920B, TIL921B, TIL922B		100%			
$V_F$	Input diode static forward voltage	$I_F = 20$ mA			1.4	V
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_F = 5$ mA, $I_C = 1$ mA			0.4	V
$C_{io}$	Input-to-output capacitance	$V_{in-out} = 0$ , $f = 1$ MHz, See Note 6		1		pF
$r_{io}$	Input-to-output internal resistance	$V_{in-out} = \pm 1$ kV, See Note 6		$10^{11}$		$\Omega$
$I_{C(on)1}$ $I_{C(on)2}$	On-state collector current symmetry ratio (see Note 7)	$V_{CE} = 5$ V, $I_F = 5$ mA	1		3	

$\dagger$  These parameters apply to either direction of the input current.

- NOTES: 6. These parameters are measured between all input-diode leads shorted together and all phototransistor leads shorted together.  
 7. The higher of the two values of  $I_{C(on)}$  generated by the two diodes is taken as  $I_{C(on)1}$ .



# TIL920, TIL921, TIL922, TIL920A, TIL921A, TIL922A TIL920B, TIL921B, TIL922B SINGLE/DUAL/QUAD CHANNEL OPTOCOUPLERS

SOOS032-D3908, FEBRUARY 1992


switching characteristics,  $T_A = 25^\circ\text{C}$

PARAMETER†	TEST CONDITIONS	TYP	UNIT
$t_r$ Rise time	$V_{CC} = 5\text{ V}$ , $I_{C(on)} = 2\text{ mA}$ , $R_L = 100\ \Omega$ , See Figure 1	6	$\mu\text{s}$
$t_f$ Fall time		6	

† These parameters apply to either direction of the input current.

## PARAMETER MEASUREMENT INFORMATION

Adjust amplitude of input pulse for  $I_{C(on)} = 2\text{ mA}$

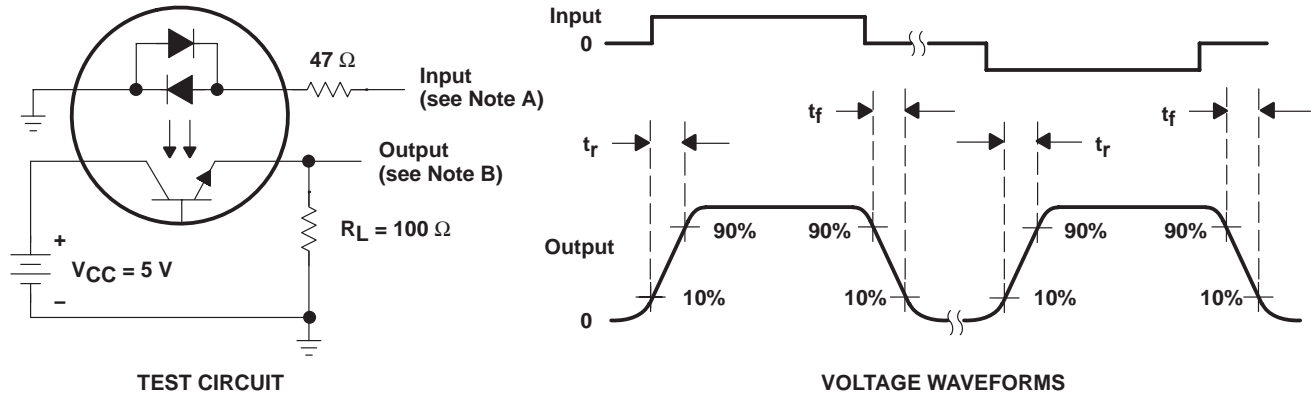

NOTES: A. The input waveform is supplied by a generator with the following characteristics:  $Z_O = 50\ \Omega$ ,  $t_r \leq 15\text{ ns}$ , duty cycle = 1%.  
B. The output waveform is monitored on an oscilloscope with the following characteristics:  $t_r \leq 12\text{ ns}$ ,  $R_i \geq 1\text{ M}\Omega$ ,  $C_i \leq 20\text{ pF}$ .

Figure 1. Switching Times

## TYPICAL CHARACTERISTICS

INPUT CURRENT  
vs  
INPUT VOLTAGE

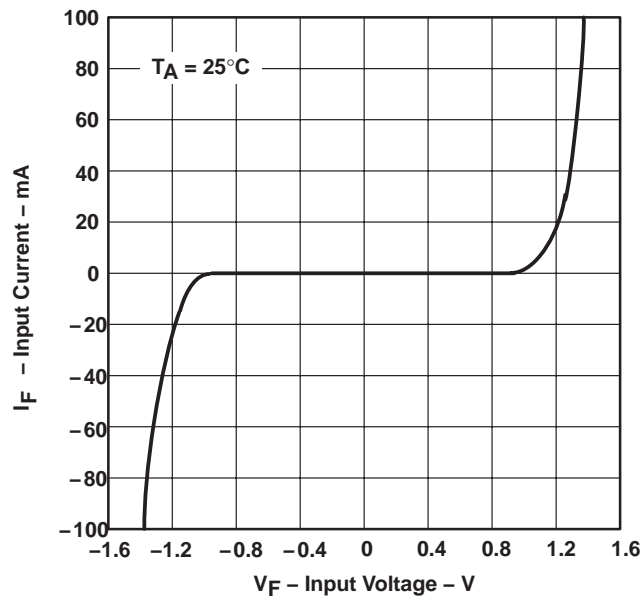


Figure 2

TEXAS  
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TIL920, TIL921, TIL922, TIL920A, TIL921A, TIL922A  
 TIL920B, TIL921B, TIL922B  
 SINGLE/DUAL/QUAD CHANNEL OPTOCOUPPLERS

SOOS032-D3908, FEBRUARY 1992

TYPICAL CHARACTERISTICS

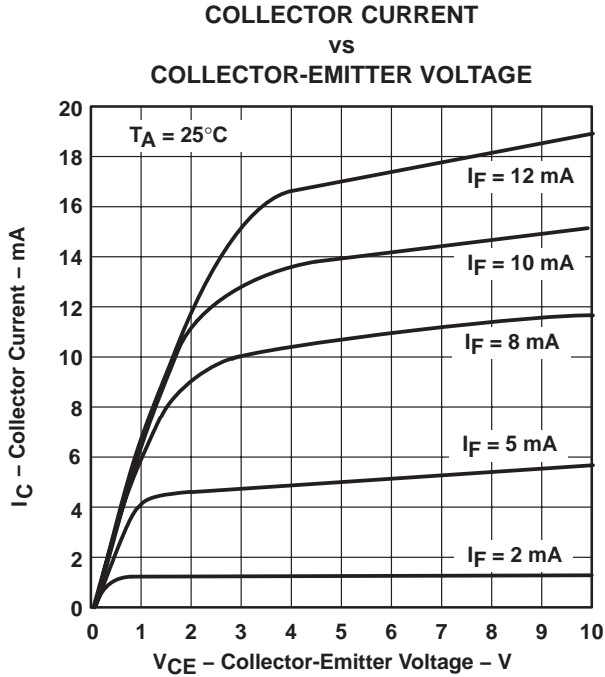


Figure 3

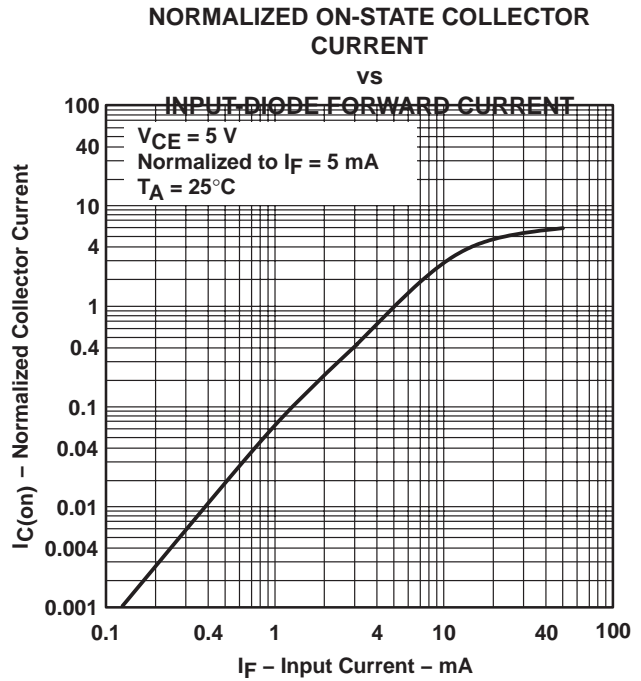


Figure 4

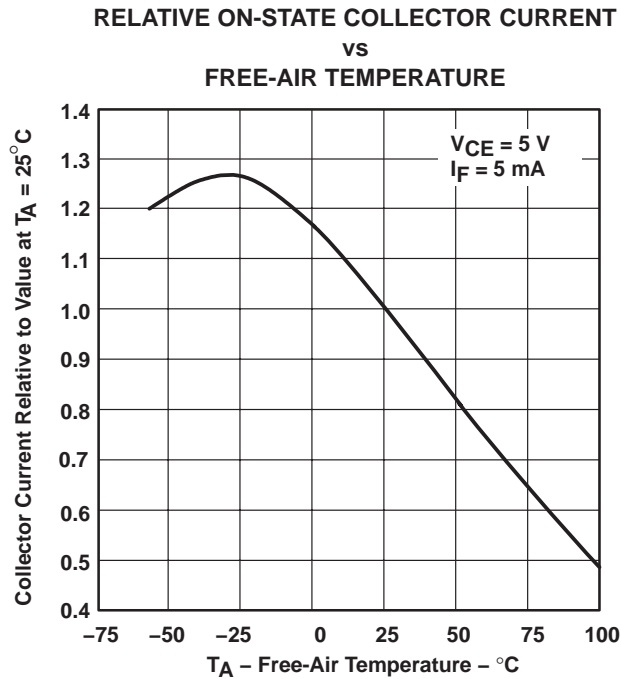


Figure 5

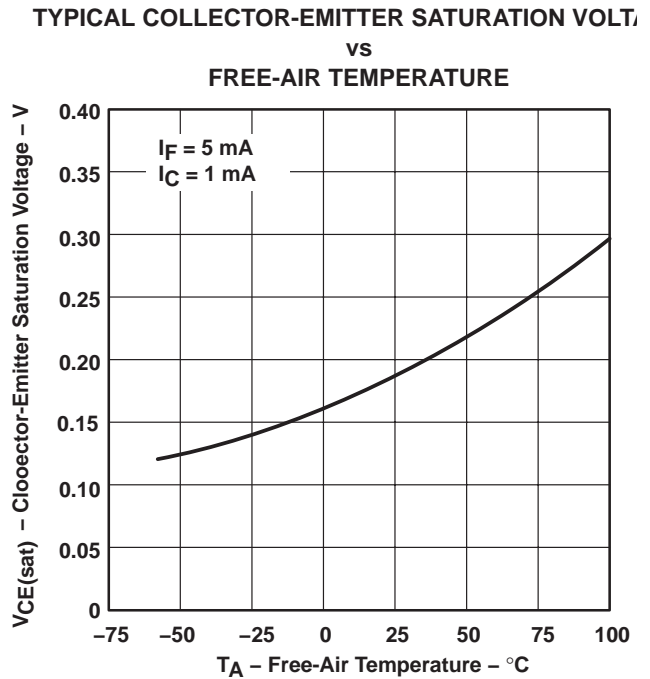


Figure 6

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
RF/IF and ZigBee® Solutions	<a href="http://www.ti.com/lprf">www.ti.com/lprf</a>

### Applications

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2008, Texas Instruments Incorporated