


1.5-A PEAK BOOST/BUCK/INVERTING SWITCHING REGULATOR

FEATURES

- Qualified for Automotive Applications
- Wide Input Voltage Range...3 V to 40 V
- High Output Switch Current...Up to 1.5 A
- Adjustable Output Voltage
- Oscillator Frequency...Up to 100 kHz
- Precision Internal Reference...2%
- Short-Circuit Current Limiting
- Low Standby Current

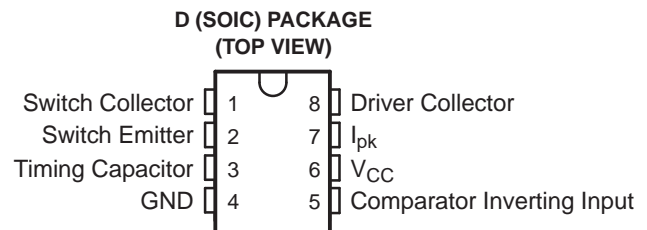

DESCRIPTION/ORDERING INFORMATION

The MC33063A is an easy-to-use IC containing all the primary circuitry needed for building simple dc-dc converters. The device primarily consists of an internal temperature-compensated reference, a comparator, an oscillator, a PWM controller with active current limiting, a driver, and a high-current output switch. Thus, the device requires minimal external components to build converters in the boost, buck, and inverting topologies.

The MC33063A is characterized for operation from -40°C to 125°C .

ORDERING INFORMATION⁽¹⁾


| T_A | PACKAGE ⁽²⁾ | | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|--|------------------------|--------------|-----------------------|------------------|
| -40°C to 125°C | SOIC – D | Reel of 2500 | MC33063AQDRQ1 | 33063AQ |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
- (2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

FUNCTIONAL BLOCK DIAGRAM

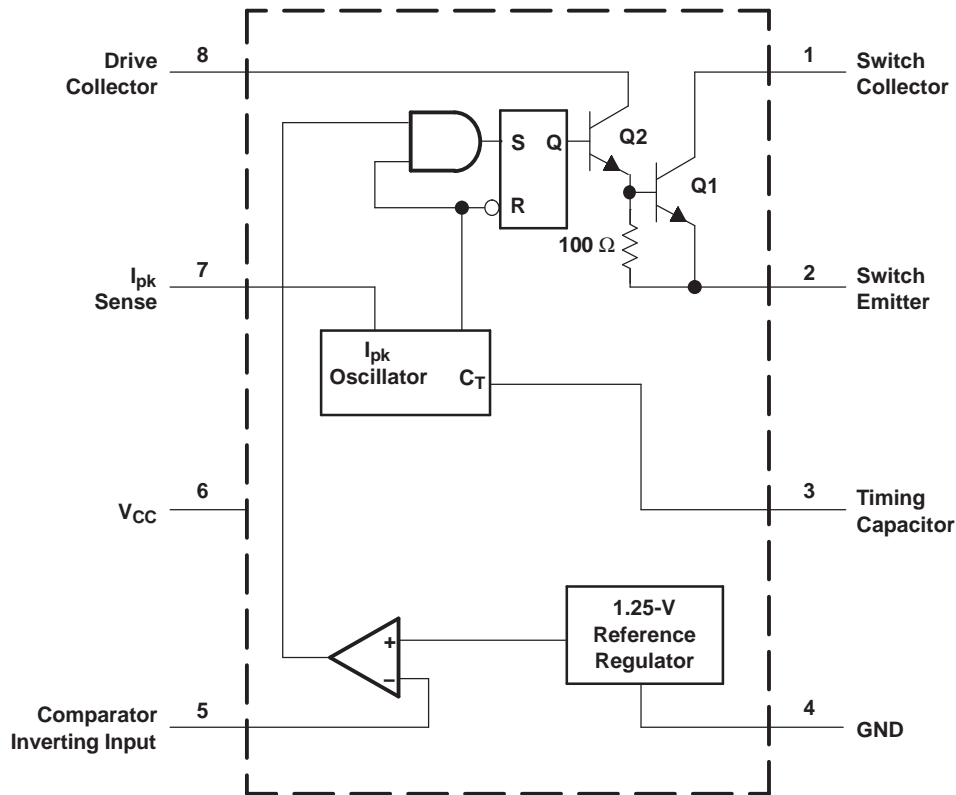

Absolute Maximum Ratings⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

| | | |
|------------------|---|-------------------|
| V_{CC} | Supply voltage | 40 V |
| V_{IR} | Comparator Inverting Input voltage range | -0.3 V to 40 V |
| $V_{C(switch)}$ | Switch Collector voltage | 40 V |
| $V_{E(switch)}$ | Switch Emitter voltage | $V_{PIN1} = 40 V$ |
| $V_{CE(switch)}$ | Switch Collector to Switch Emitter voltage | 40 V |
| $V_{C(driver)}$ | Driver Collector voltage | 40 V |
| $I_{C(driver)}$ | Driver Collector current | 100 mA |
| I_{SW} | Switch current | 1.5 A |
| θ_{JA} | Package thermal impedance ⁽²⁾⁽³⁾ | 97°C/W |
| T_J | Operating virtual junction temperature | 150°C |
| T_{stg} | Storage temperature range | -65°C to 150°C |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Maximum power dissipation is a function of $T_J(max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
- (3) The package thermal impedance is calculated in accordance with JESD 51-7.

Recommended Operating Conditions

| | | MIN | MAX | UNIT |
|----------|--------------------------------|-----|-----|------|
| V_{CC} | Supply voltage | 3 | 40 | V |
| T_A | Operating free-air temperature | -40 | 125 | °C |

Electrical Characteristics

 $V_{CC} = 5\text{ V}$, $T_A =$ full operating range (unless otherwise noted) (see block diagram)

Oscillator

| PARAMETER | | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT |
|----------------------|-----------------------------------|---|-------|-----|-----|-----|---------------|
| f_{osc} | Oscillator frequency | $V_{PIN5} = 0\text{ V}$, $C_T = 1\text{ nF}$ | 25°C | 24 | 33 | 42 | kHz |
| I_{chg} | Charge current | $V_{CC} = 5\text{ V to }40\text{ V}$ | 25°C | 24 | 35 | 42 | μA |
| I_{dischg} | Discharge current | $V_{CC} = 5\text{ V to }40\text{ V}$ | 25°C | 140 | 220 | 260 | μA |
| I_{dischg}/I_{chg} | Discharge-to-charge current ratio | $V_{PIN7} = V_{CC}$ | 25°C | 5.2 | 6.5 | 7.5 | |
| V_{Ipk} | Current-limit sense voltage | $I_{dischg} = I_{chg}$ | 25°C | 250 | 300 | 350 | mV |

Output Switch⁽¹⁾

| PARAMETER | | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT |
|---------------|---|--|------------|-----|------|-----|---------------|
| $V_{CE(sat)}$ | Saturation voltage – Darlington connection | $I_{SW} = 1\text{ A}$, pins 1 and 8 connected | Full range | | 1 | 1.3 | V |
| $V_{CE(sat)}$ | Saturation voltage – non-Darlington connection ⁽²⁾ | $I_{SW} = 1\text{ A}$, $R_{PIN8} = 82\ \Omega$ to V_{CC} , Forced $\beta \sim 20$ | Full range | | 0.45 | 0.7 | V |
| h_{FE} | DC current gain | $I_{SW} = 1\text{ A}$, $V_{CE} = 5\text{ V}$ | 25°C | 50 | 75 | | |
| $I_{C(off)}$ | Collector off-state current | $V_{CE} = 40\text{ V}$ | Full range | | 0.01 | 100 | μA |

(1) Low duty-cycle pulse testing is used to maintain junction temperature as close to ambient temperature as possible.

(2) In the non-Darlington configuration, if the output switch is driven into hard saturation at low switch currents ($\leq 300\text{ mA}$) and high driver currents ($\geq 30\text{ mA}$), it may take up to $2\ \mu\text{s}$ for the switch to come out of saturation. This condition effectively shortens the off time at frequencies $\geq 30\text{ kHz}$, becoming magnified as temperature increases. The following output drive condition is recommended in the non-Darlington configuration:

Forced β of output switch = $I_{C,SW} / (I_{C,driver} - 7\text{ mA}) \geq 10$, where -7 mA is required by the $100\text{-}\Omega$ resistor in the emitter of the driver to forward bias the V_{be} of the switch.

Comparator

| PARAMETER | | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT |
|-----------------|-----------------------------------|--------------------------------------|------------|-------|------|-------|------|
| V_{th} | Threshold voltage | | 25°C | 1.225 | 1.25 | 1.275 | V |
| | | | Full range | 1.21 | | 1.29 | |
| ΔV_{th} | Threshold-voltage line regulation | $V_{CC} = 5\text{ V to }40\text{ V}$ | Full range | | 1.4 | 5 | mV |
| I_{IB} | Input bias current | $V_{IN} = 0\text{ V}$ | Full range | | -20 | -400 | nA |

Total Device

| PARAMETER | | TEST CONDITIONS | T_A | MIN | MAX | UNIT |
|-----------|----------------|--|------------|-----|-----|------|
| I_{CC} | Supply current | $V_{CC} = 5\text{ V to }40\text{ V}$, $C_T = 1\text{ nF}$, $V_{PIN7} = V_{CC}$, $V_{PIN5} > V_{th}$, $V_{PIN2} = \text{GND}$, All other pins open | Full range | | 4 | mA |

TYPICAL CHARACTERISTICS

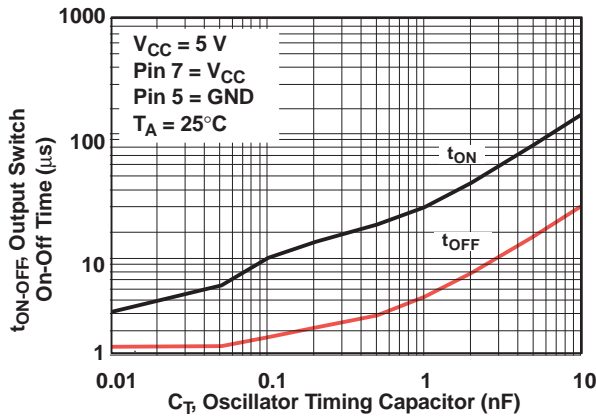


Figure 1. Output Switch On-Off Time vs Oscillator Timing Capacitor

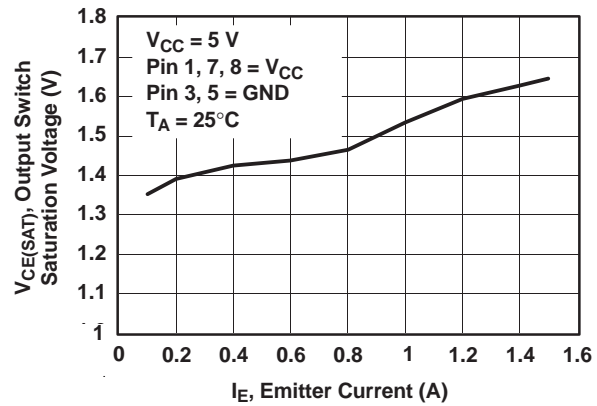


Figure 2. Output Switch Saturation Voltage vs Emitter Current (Emitter-Follower Configuration)

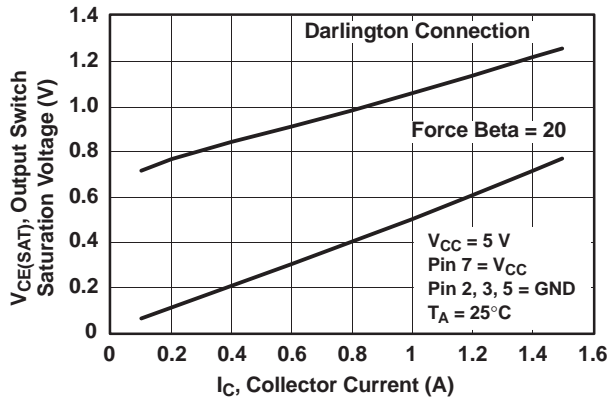


Figure 3. Output Switch Saturation Voltage vs Collector Current (Common-Emitter Configuration)

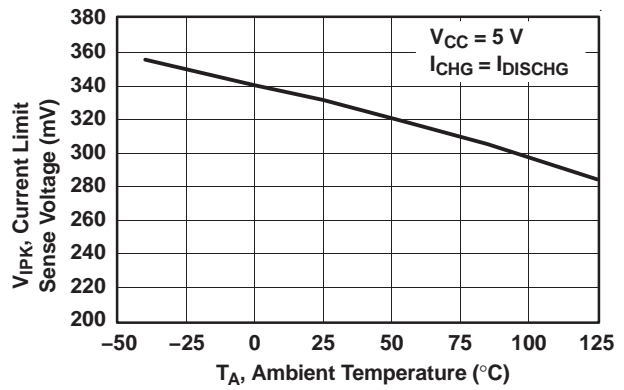


Figure 4. Current-Limit Sense Voltage vs Temperature

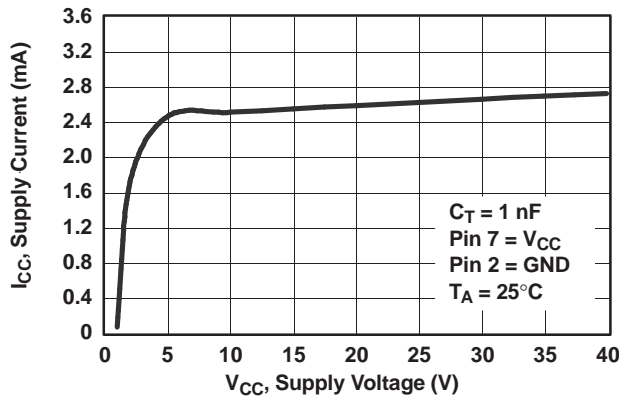


Figure 5. Standby Supply Current vs Supply Voltage

TYPICAL CHARACTERISTICS (continued)


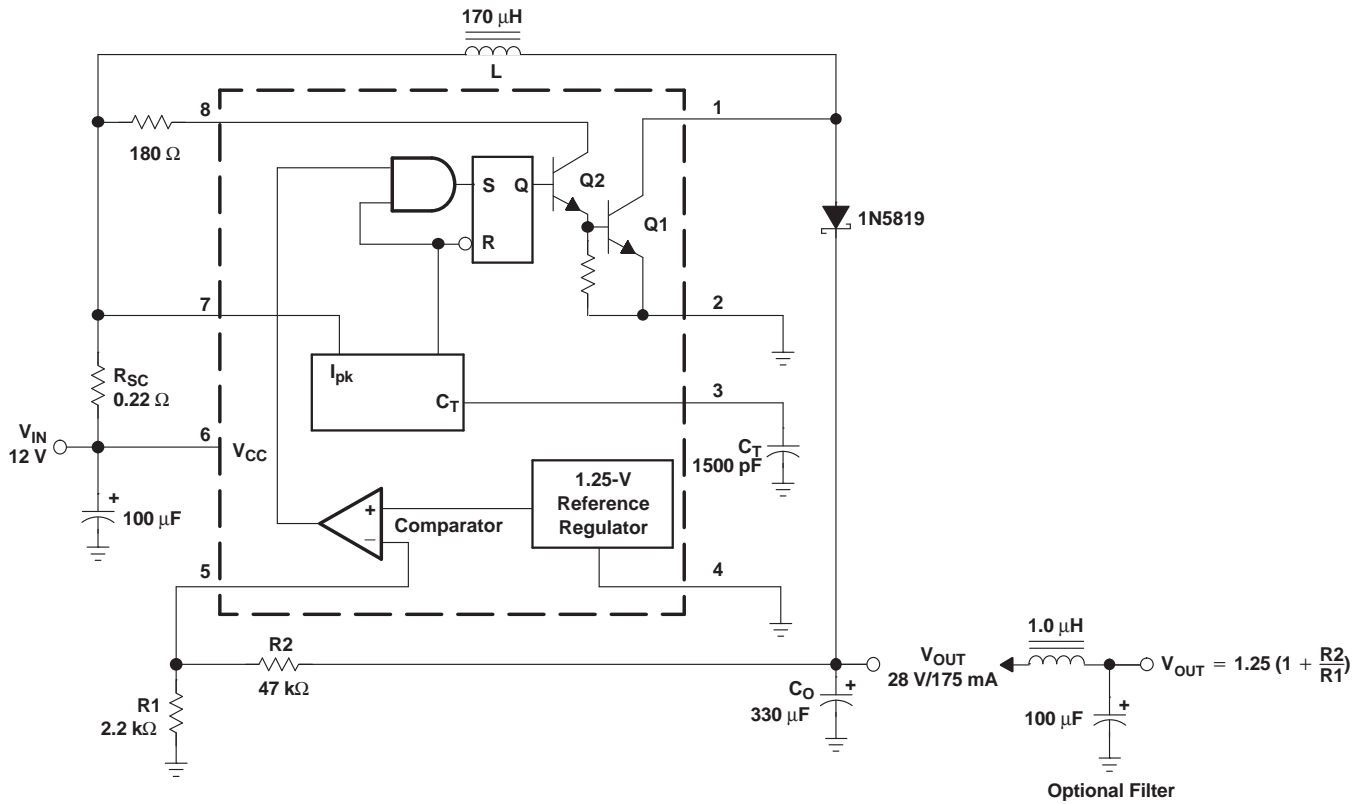


Figure 6. Step-Up Converter

| TEST | CONDITIONS | RESULTS |
|------------------------------------|--|----------------------|
| Line regulation | $V_{IN} = 8 \text{ V to } 16 \text{ V}$, $I_O = 175 \text{ mA}$ | 30 mV \pm 0.05% |
| Load regulation | $V_{IN} = 12 \text{ V}$, $I_O = 75 \text{ mA to } 175 \text{ mA}$ | 10 mV \pm 0.017% |
| Output ripple | $V_{IN} = 12 \text{ V}$, $I_O = 175 \text{ mA}$ | 400 mV _{PP} |
| Efficiency | $V_{IN} = 12 \text{ V}$, $I_O = 175 \text{ mA}$ | 87.7% |
| Output ripple with optional filter | $V_{IN} = 12 \text{ V}$, $I_O = 175 \text{ mA}$ | 40 mV _{PP} |

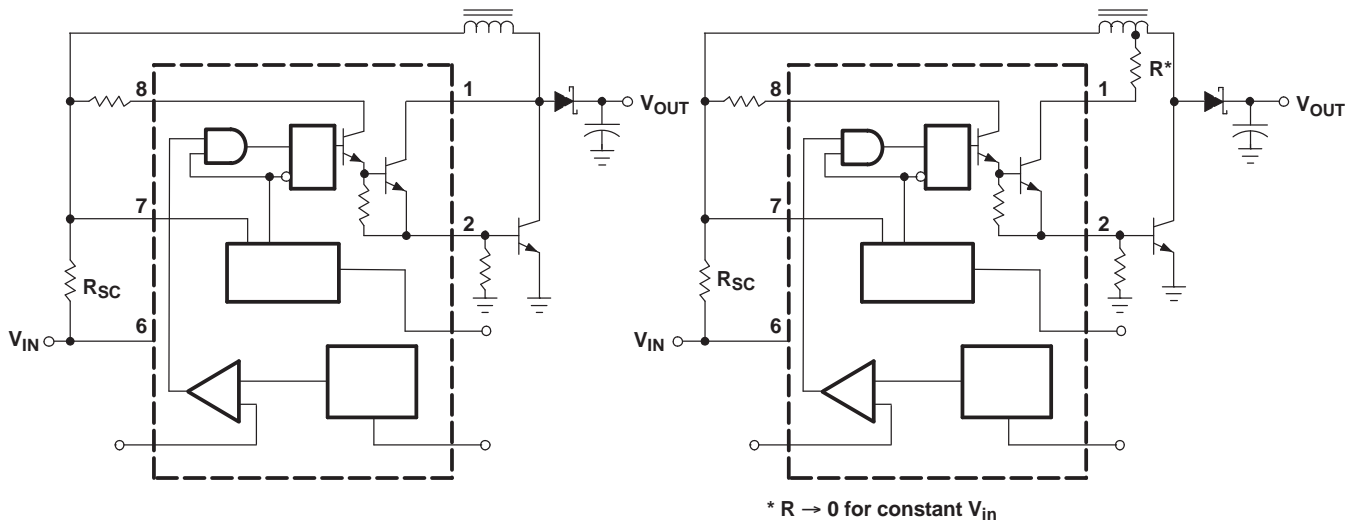

a) EXTERNAL npn SWITCH

b) EXTERNAL pnp SATURATED SWITCH (see Note A)

- A. If the output switch is driven into hard saturation (non-Darlington configuration) at low switch currents (≤ 300 mA) and high driver currents (≥ 30 mA), it may take up to $2 \mu\text{s}$ to come out of saturation. This condition will shorten the off time at frequencies ≥ 30 kHz and is magnified at high temperatures. This condition does not occur with a Darlington configuration because the output switch cannot saturate. If a non-Darlington configuration is used, the output drive configuration in Figure 7b is recommended.

Figure 7. External Current-Boost Connections for I_C Peak Greater Than 1.5 A

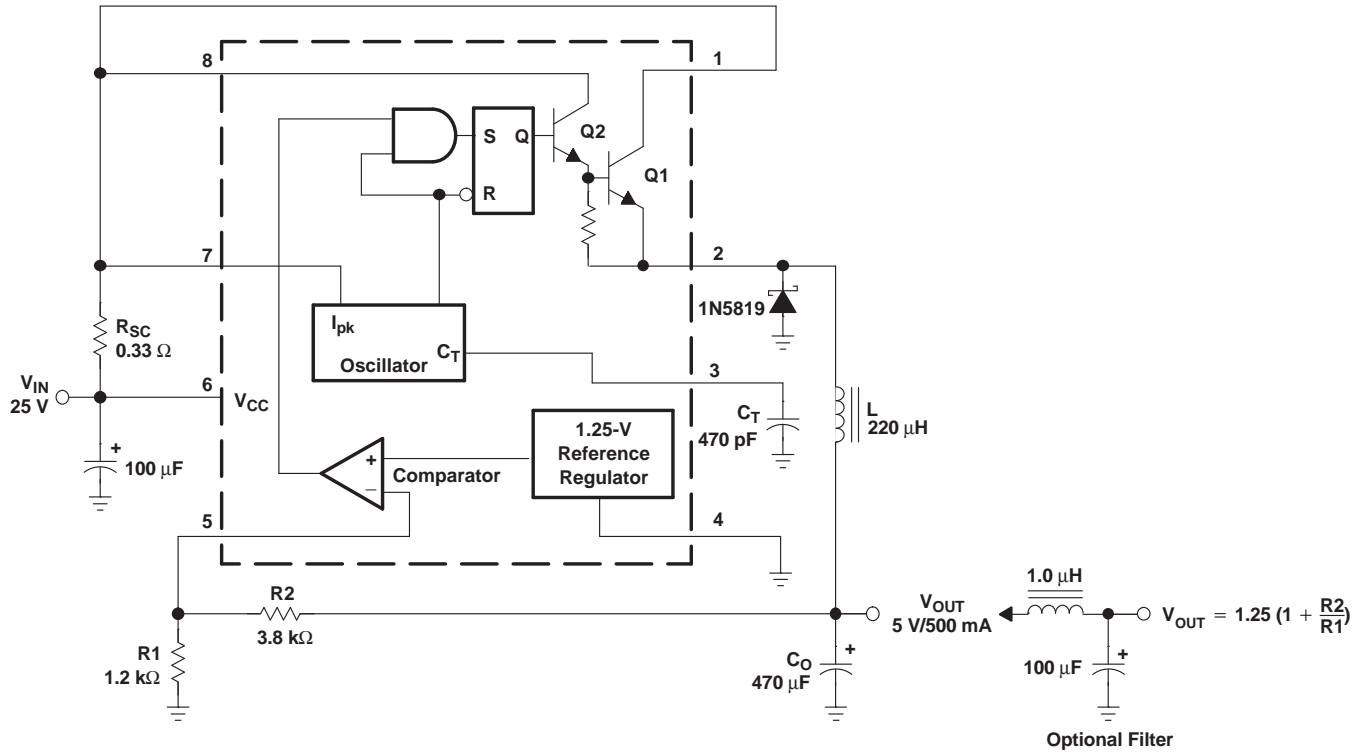


Figure 8. Step-Down Converter

| TEST | CONDITIONS | RESULTS |
|------------------------------------|---|---------------------------|
| Line regulation | $V_{IN} = 15\text{ V to }25\text{ V}, I_O = 500\text{ mA}$ | $12\text{ mV} \pm 0.12\%$ |
| Load regulation | $V_{IN} = 25\text{ V}, I_O = 50\text{ mA to }500\text{ mA}$ | $3\text{ mV} \pm 0.03\%$ |
| Output ripple | $V_{IN} = 25\text{ V}, I_O = 500\text{ mA}$ | 120 mV_{PP} |
| Short-circuit current | $V_{IN} = 25\text{ V}, R_L = 0.1\ \Omega$ | 1.1 A |
| Efficiency | $V_{IN} = 25\text{ V}, I_O = 500\text{ mA}$ | 83.7% |
| Output ripple with optional filter | $V_{IN} = 25\text{ V}, I_O = 500\text{ mA}$ | 40 mV_{PP} |

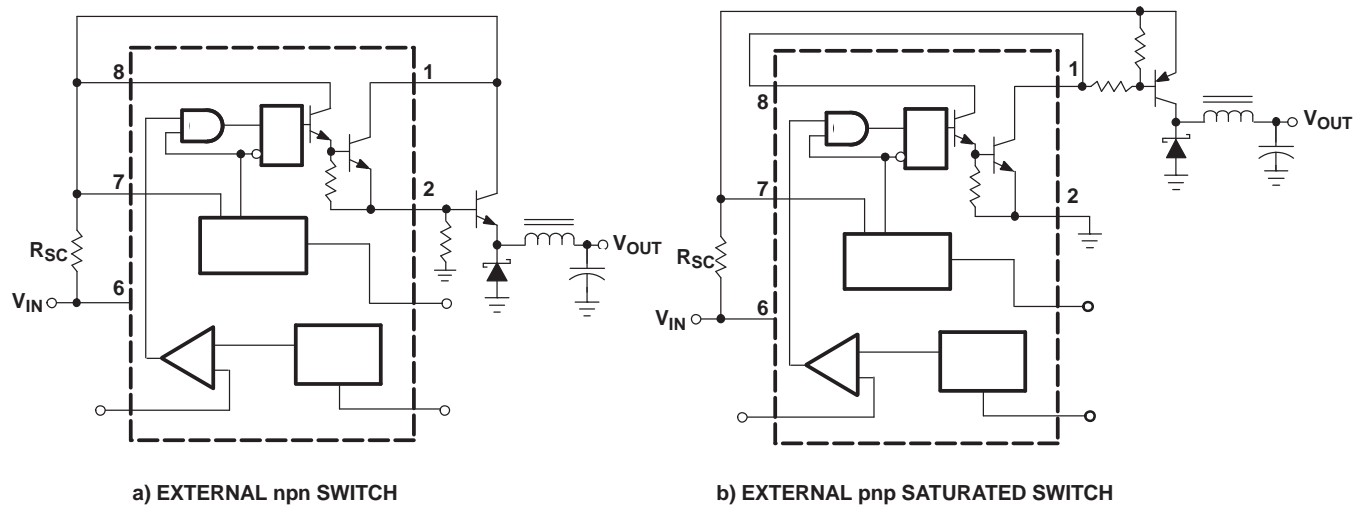


Figure 9. External Current-Boost Connections for I_C Peak Greater Than 1.5 A

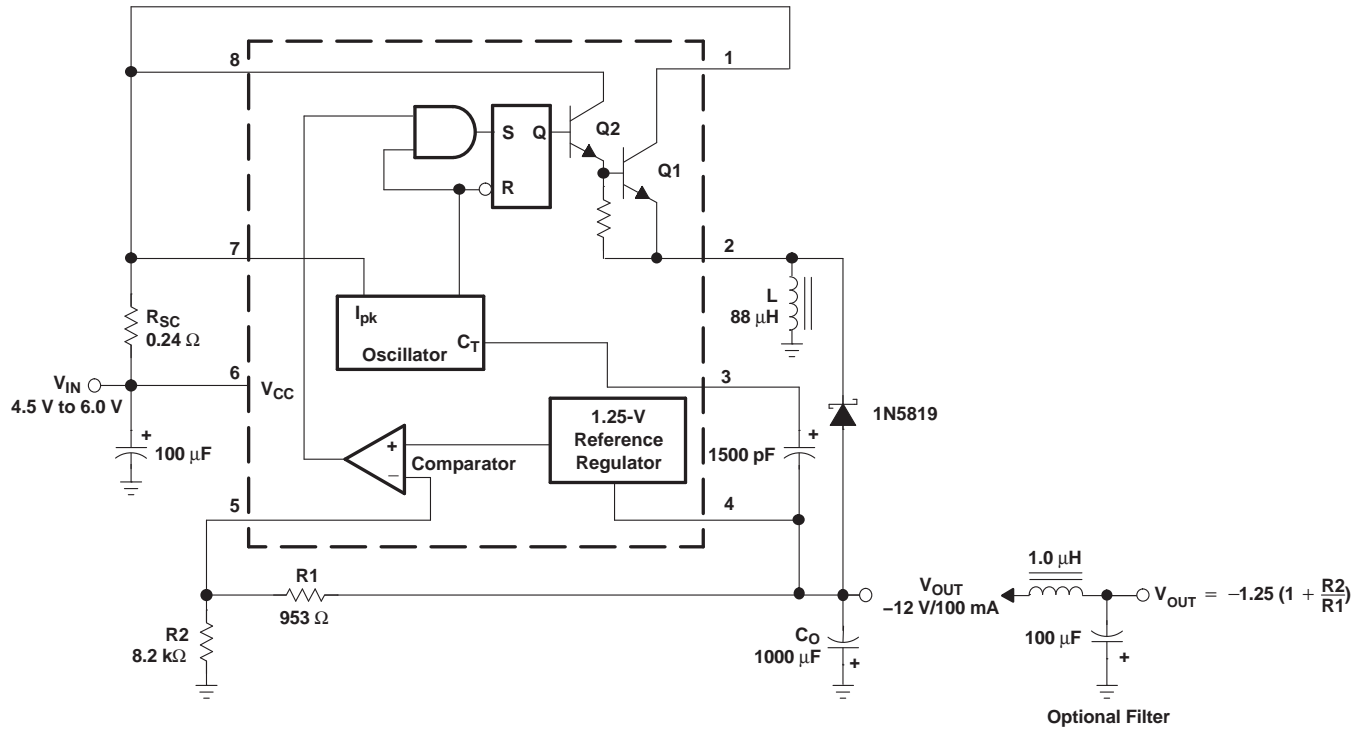


Figure 10. Voltage-Inverting Converter

| TEST | CONDITIONS | RESULTS |
|------------------------------------|--|------------------------------|
| Line regulation | $V_{IN} = 4.5 \text{ V to } 6 \text{ V}, I_O = 100 \text{ mA}$ | $3 \text{ mV} \pm 0.12\%$ |
| Load regulation | $V_{IN} = 5 \text{ V}, I_O = 10 \text{ mA to } 100 \text{ mA}$ | $0.022 \text{ V} \pm 0.09\%$ |
| Output ripple | $V_{IN} = 5 \text{ V}, I_O = 100 \text{ mA}$ | 500 mV_{PP} |
| Short-circuit current | $V_{IN} = 5 \text{ V}, R_L = 0.1 \Omega$ | 910 mA |
| Efficiency | $V_{IN} = 5 \text{ V}, I_O = 100 \text{ mA}$ | 62.2% |
| Output ripple with optional filter | $V_{IN} = 5 \text{ V}, I_O = 100 \text{ mA}$ | 70 mV_{PP} |

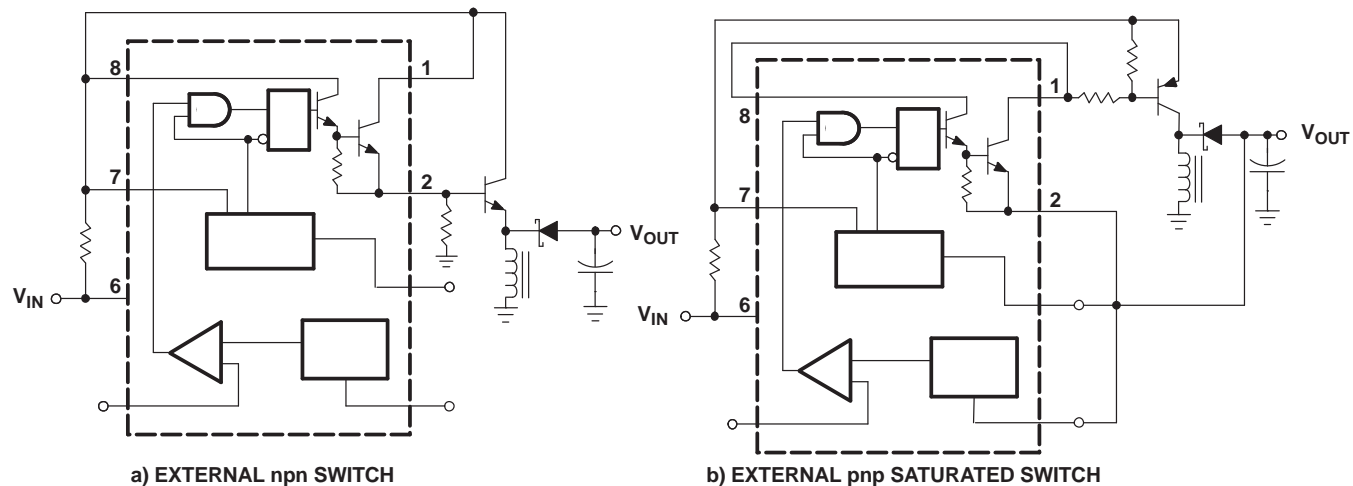


Figure 11. External Current-Boost Connections for I_C Peak Greater Than 1.5 A

APPLICATION INFORMATION

| CALCULATION | STEP UP | STEP DOWN | VOLTAGE INVERTING |
|----------------------|---|---|---|
| t_{on}/t_{off} | $\frac{V_{out} + V_F - V_{in(min)}}{V_{in(min)} - V_{sat}}$ | $\frac{V_{out} + V_F}{V_{in(min)} - V_{sat} - V_{out}}$ | $\frac{ V_{out} + V_F}{V_{in} - V_{sat}}$ |
| $(t_{on} + t_{off})$ | $\frac{1}{f}$ | $\frac{1}{f}$ | $\frac{1}{f}$ |
| t_{off} | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$ | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$ | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$ |
| t_{on} | $(t_{on} + t_{off}) - t_{off}$ | $(t_{on} + t_{off}) - t_{off}$ | $(t_{on} + t_{off}) - t_{off}$ |
| C_T | $4 \times 10^{-5} t_{on}$ | $4 \times 10^{-5} t_{on}$ | $4 \times 10^{-5} t_{on}$ |
| $I_{pk(switch)}$ | $2I_{out(max)} \left(\frac{t_{on}}{t_{off}} + 1 \right)$ | $2I_{out(max)}$ | $2I_{out(max)} \left(\frac{t_{on}}{t_{off}} + 1 \right)$ |
| R_{SC} | $\frac{0.3}{I_{pk(switch)}}$ | $\frac{0.3}{I_{pk(switch)}}$ | $\frac{0.3}{I_{pk(switch)}}$ |
| $L_{(min)}$ | $\left(\frac{(V_{in(min)} - V_{sat})}{I_{pk(switch)}} \right) t_{on(max)}$ | $\left(\frac{(V_{in(min)} - V_{sat} - V_{out})}{I_{pk(switch)}} \right) t_{on(max)}$ | $\left(\frac{(V_{in(min)} - V_{sat})}{I_{pk(switch)}} \right) t_{on(max)}$ |
| C_O | $9 \frac{I_{out} t_{on}}{V_{ripple(pp)}}$ | $\frac{I_{pk(switch)} (t_{on} + t_{off})}{8V_{ripple(pp)}}$ | $9 \frac{I_{out} t_{on}}{V_{ripple(pp)}}$ |

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| MC33063AQDRQ1 | ACTIVE | SOIC | D | 8 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF MC33063A-Q1 :

- Catalog: [MC33063A](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 E. Reference JEDEC MS-012 variation AA.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|-------------------------------|--|
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Transportation and Automotive | www.ti.com/automotive |
| Video and Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless-apps |

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated