

Ultra-Low On-Resistance, 4-A Integrated Load Switch with Controlled Turn-on

Check for Samples: [TPS22920](#)

FEATURES

- **Integrated Load Switch**
- **Input Voltage Range: 0.75-V to 3.6-V**
- **Integrated Pass-FET $r_{\text{DS(on)}} = 2\text{m}\Omega$ (typ) at 3.6-V**
- **Ultra-Low ON-Resistance**
 - $r_{\text{ON}} = 5.3\text{-m}\Omega$ at 3.6-V
 - $r_{\text{ON}} = 5.4\text{-m}\Omega$ at 2.5-V
 - $r_{\text{ON}} = 5.5\text{-m}\Omega$ at 1.8-V
 - $r_{\text{ON}} = 5.8\text{-m}\Omega$ at 1.2-V
 - $r_{\text{ON}} = 6.1\text{-m}\Omega$ at 1.05-V
 - $r_{\text{ON}} = 7.3\text{-m}\Omega$ at 0.75-V
- **Ultra Small CSP-8 package 0.9mm×1.9mm, 0.5mm pitch**
- **4-A Maximum Continuous Switch Current**
- **Shutdown Current 5.5- μ A max**
- **Low Threshold Control Input**
- **Controlled slew- rate to avoid inrush current**
- **Quick Output Discharge Transistor**
- **ESD Performance Tested Per JESD 22**
 - **4000-V Human-Body Model (A114-B, Class II)**
 - **1000-V Charged-Device Model (C101)**

APPLICATIONS

- **Notebook / Netbook Computer**
- **Tablet PC**
- **PDA's / Smartphones**
- **GPS Navigation Devices**
- **MP3 Players**

DESCRIPTION

The TPS22920 is a small, ultra-low r_{ON} load switch with controlled turn on. The device contains a N-channel MOSFET that can operate over an input voltage range of 0.75 V to 3.6 V and switch currents up to 4-A. An integrated charge pump biases the NMOS switch in order to achieve a minimum switch ON resistance (r_{ON}). The switch is controlled by an on/off input (ON), which is capable of interfacing directly with low-voltage control signals.

The TPS22920 has a 1250- Ω on-chip load resistor for quick output discharge when the switch is turned off.

The TPS22920 has an internally controlled rise time in order to reduce inrush current. The TPS22920 features a rise time of 880 μ S at 3.6-V.

The TPS22920 is available in an ultra-small, space-saving 8-pin CSP package and is characterized for operation over the free-air temperature range of -40°C to 85°C .

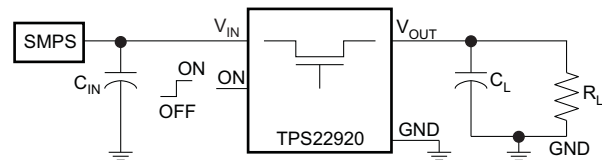


Figure 1. Typical Application

FEATURE LIST

	r_{ON} (typ) at 3.6 V	RISE TIME (typ) at 3.6V	QUICK OUTPUT DISCHARGE ⁽¹⁾	MAXIMUM OUTPUT CURRENT	ENABLE
TPS22920	5.3- m Ω	880 μ S	Yes	4-A	Active High

(1) This feature discharges the output of the switch to ground through a 1250- Ω resistor, preventing the output from floating. See Application section 'Output Pull-Down'



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ORDERING INFORMATION

T _A	PACKAGE ⁽¹⁾	ORDERABLE PART NUMBER	TOP-SIDE MARKING/ STATUS ⁽²⁾
-40°C to 85°C	YZP (0.5mm pitch)	Reel	TPS22920YZPR
		Tape	TPS22920YZPT
			__ _6Z_

- (1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.
- (2) The actual top-side marking has two preceding characters to denote year, month and one following character to designate the wafer fab/assembly site. Pin 1 identifier indicates solder-bump composition (1 = SnPb, ● = Pb-free).




Figure 2. Bump Assignments


Bump Assignments (YZP Package)

D	GND	ON
C	V _{OUT}	V _{IN}
B	V _{OUT}	V _{IN}
A	V _{OUT}	V _{IN}
	1	2

Pin Description

TPS22920	PIN NAME	DESCRIPTION
YZP		
D1	GND	Ground
D2	ON	Switch control input, active high. Do not leave floating
A1, B1, C1	VOUT	Switch output
A2, B2, C2	VIN	Switch input, bypass this input with a ceramic capacitor to ground

FUNCTIONAL BLOCK DIAGRAM

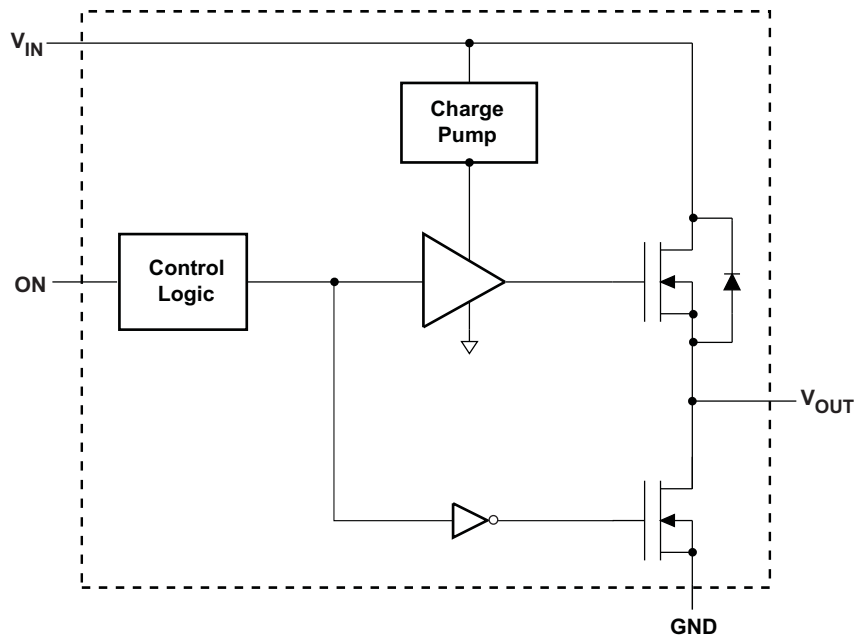

FUNCTION TABLE

ON	VIN to VOUT	VOUT to GND ⁽¹⁾
L	OFF	ON
H	ON	OFF

(1) See Application section 'Output Pull-Down'

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

		VALUE	UNIT
V _{IN}	Input voltage range	-0.3 to 4	V
V _{OUT}	Output voltage range	V _{IN} + 0.3	V
V _{ON}	Input voltage range	-0.3 to 4	V
I _{MAX}	Maximum Continuous Switch Current	4	A
I _P LS	Maximum Pulsed Switch Current, pulse <300µS, 2% duty cycle	6	A
T _A	Operating free-air temperature range	-40 to 85	°C
T _J	Maximum junction temperature	125	°C
T _{STG}	Storage temperature range	-65 to 150	°C
T _{LEAD}	Maximum lead temperature (10-s soldering time)	300	°C
ESD	Electrostatic discharge protection	Human-Body Model (HBM)	4000
		Charged Device Model (CDM)	1000

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

THERMAL INFORMATION

THERMAL METRIC ⁽¹⁾		TPS22920	UNITS
		CS130P (8 PINS)	
θ_{JA}	Junction-to-ambient thermal resistance	130	°C/W
θ_{JCTop}	Junction-to-case (top) thermal resistance	54	
θ_{JB}	Junction-to-board thermal resistance	51	
ψ_{JT}	Junction-to-top characterization parameter	1	
ψ_{JB}	Junction-to-board characterization parameter	50	
θ_{JCbot}	Junction-to-case (bottom) thermal resistance	n/a	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

RECOMMENDED OPERATING CONDITIONS

		MIN	MAX	UNIT
V_{IN}	Input voltage range	0.75	3.6	V
V_{OUT}	Output voltage range		V_{IN}	V
V_{IH}	High-level input voltage, ON	$V_{IN} = 2.5\text{-V to } 3.6\text{ V}$		V
		$V_{IN} = 0.75\text{-V to } 2.49\text{ V}$		V
V_{IL}	Low-level input voltage, ON	$V_{IN} = 2.5\text{-V to } 3.6\text{ V}$		V
		$V_{IN} = 0.75\text{-V to } 2.49\text{ V}$		V
C_{IN}	Input Capacitor	1 ⁽¹⁾		μF

(1) See *Input Capacitor* section in Application Information.

ELECTRICAL CHARACTERISTICS

$V_{IN} = 0.75\text{ V to } 3.6\text{ V}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A	MIN	TYP ⁽¹⁾	MAX	UNIT	
I_{IN}	$I_{OUT} = 0, V_{IN} = V_{ON}$	Full	Full	$V_{IN} = 3.6\text{ V}$	68	160	μA
				$V_{IN} = 2.5\text{ V}$	40	70	
				$V_{IN} = 1.8\text{ V}$	25	350	
			Full	$V_{IN} = 1.2\text{ V}$	103	200	μA
				$V_{IN} = 1.05\text{ V}$	78	110	
				$V_{IN} = 0.75\text{ V}$	37	70	
$I_{IN(Leak)}$	Off Supply Current (After Pull Down)	$V_{ON} = \text{GND}, V_{OUT} = 0$	Full		5.5	μA	
r_{ON}	On-Resistance	25°C	Full	$V_{IN} = 3.6\text{ V}, I_{OUT} = -200\text{ mA}$	5.3	8.8	mΩ
				Full			
		25°C	Full	$V_{IN} = 2.5\text{ V}, I_{OUT} = -200\text{ mA}$	5.4	8.9	mΩ
				Full			
		25°C	Full	$V_{IN} = 1.8\text{ V}, I_{OUT} = -200\text{ mA}$	5.5	9.1	mΩ
				Full			
		25°C	Full	$V_{IN} = 1.2\text{ V}, I_{OUT} = -200\text{ mA}$	5.8	9.4	mΩ
				Full			
		25°C	Full	$V_{IN} = 1.05\text{ V}, I_{OUT} = -200\text{ mA}$	6.1	9.7	mΩ
				Full			
		25°C	Full	$V_{IN} = 0.75\text{ V}, I_{OUT} = -200\text{ mA}$	7.3	11.0	mΩ
				Full			
RPD	Output pull down resistance ⁽²⁾	$V_{IN} = 3.3\text{ V}, V_{ON} = 0, I_{OUT} = 3\text{ mA}$	Full	1250	1500	Ω	
I_{ON}	ON input leakage current	$V_{ON} = 0.9\text{ V to } 3.6\text{ V or GND}$	Full		0.1	μA	

(1) Typical values are at $V_{IN} = 3.3\text{ V}$ and $T_A = 25^\circ\text{C}$.

(2) See Output Pulldown in *Application Information*.

SWITCHING CHARACTERISTICS


 $V_{IN} = 3.6\text{ V}$, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
t_{ON}	Turn-ON time	$R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $V_{IN} = 3.6\text{ V}$		970		μs
t_{OFF}	Turn-OFF time	$R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $V_{IN} = 3.6\text{ V}$		3		
t_r	VOUT Rise time	$R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $V_{IN} = 3.6\text{ V}$		880		
t_f	VOUT Fall time	$R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $V_{IN} = 3.6\text{ V}$		2		

 $V_{IN} = 0.9\text{ V}$, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
t_{ON}	Turn-ON time	$R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $V_{IN} = 0.9\text{ V}$		840		μs
t_{OFF}	Turn-OFF time	$R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $V_{IN} = 0.9\text{ V}$		16		
t_r	VOUT Rise time	$R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $V_{IN} = 0.9\text{ V}$		470		
t_f	VOUT Fall time	$R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $V_{IN} = 0.9\text{ V}$		5		

PARAMETRIC MEASUREMENT INFORMATION

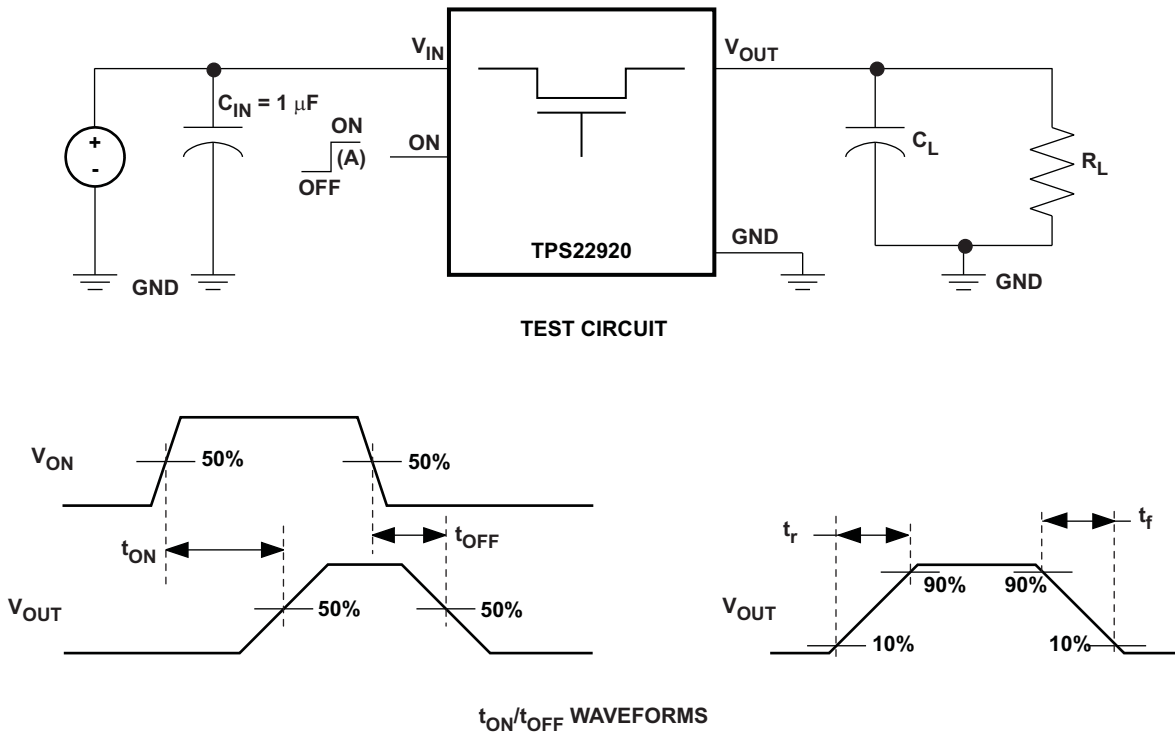

(A) Rise and fall times of the control signal is 100 ns.

Figure 3. Test Circuit and t_{ON}/t_{OFF} Waveforms

TYPICAL CHARACTERISTICS

ON-STATE RESISTANCE vs INPUT VOLTAGE

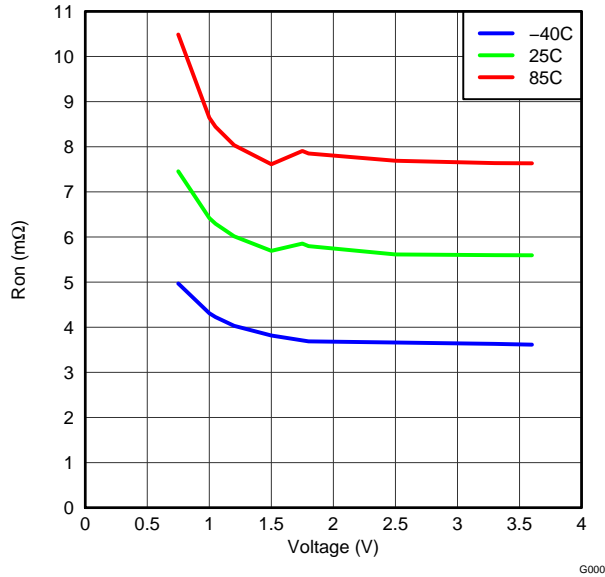


Figure 4.

ON-STATE RESISTANCE vs TEMPERATURE

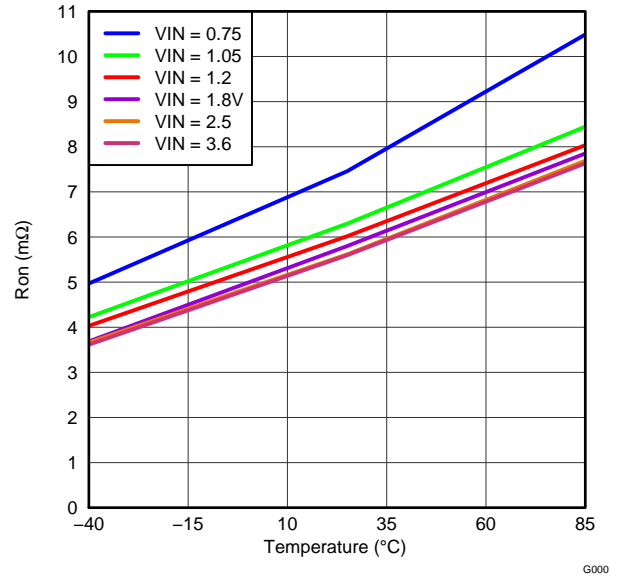


Figure 5.

INPUT CURRENT, QUIESCENT vs INPUT VOLTAGE

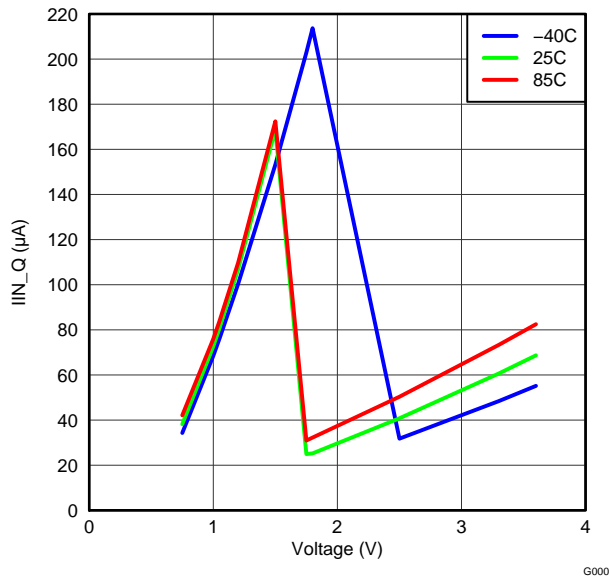


Figure 6.

INPUT CURRENT, LEAK vs INPUT VOLTAGE

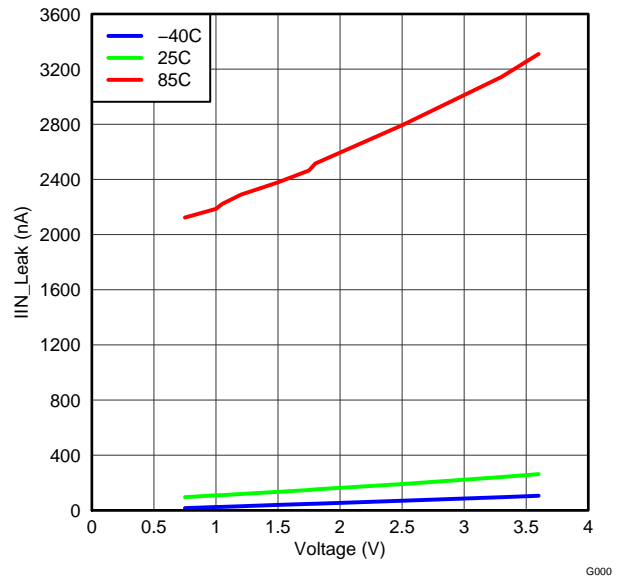


Figure 7.

TYPICAL CHARACTERISTICS (continued)

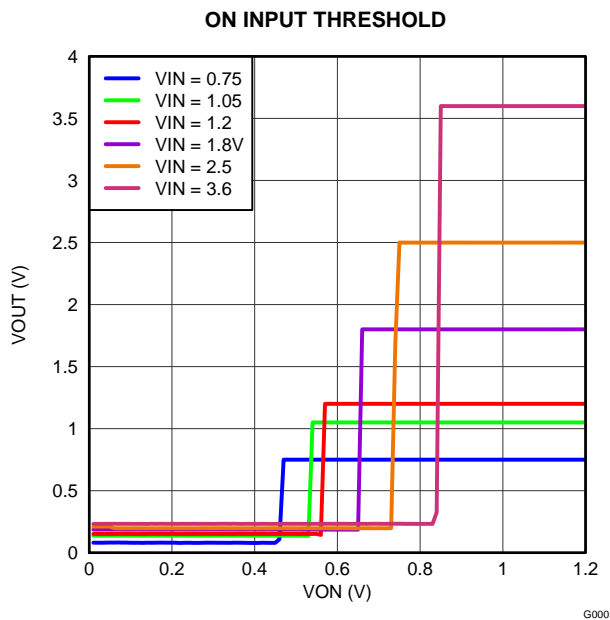


Figure 8.

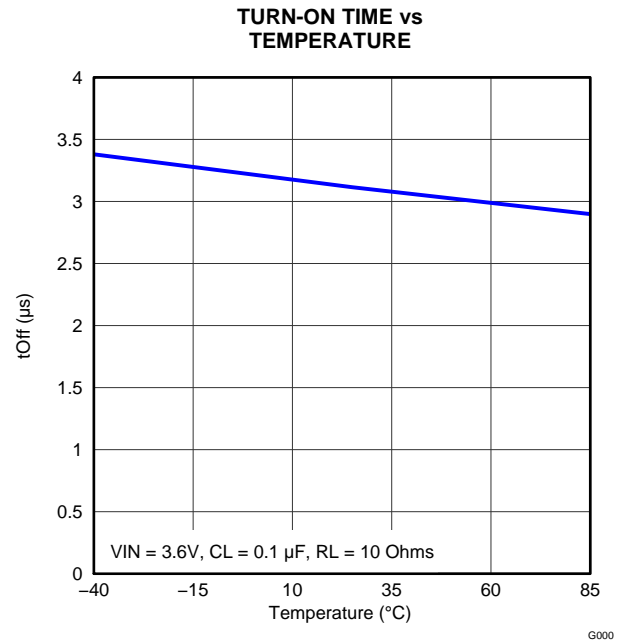


Figure 9.

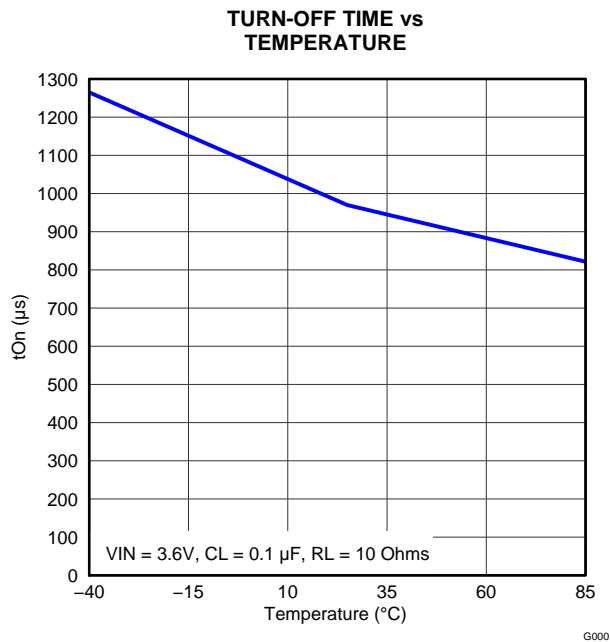


Figure 10.

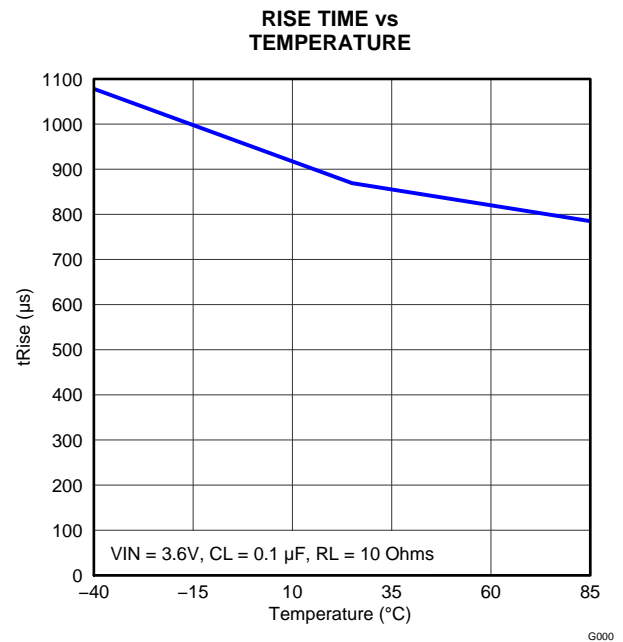


Figure 11.

TYPICAL CHARACTERISTICS (continued)

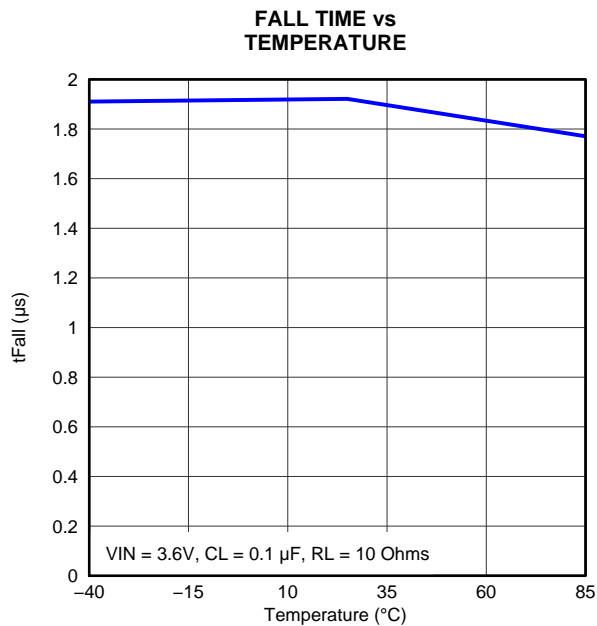


Figure 12.

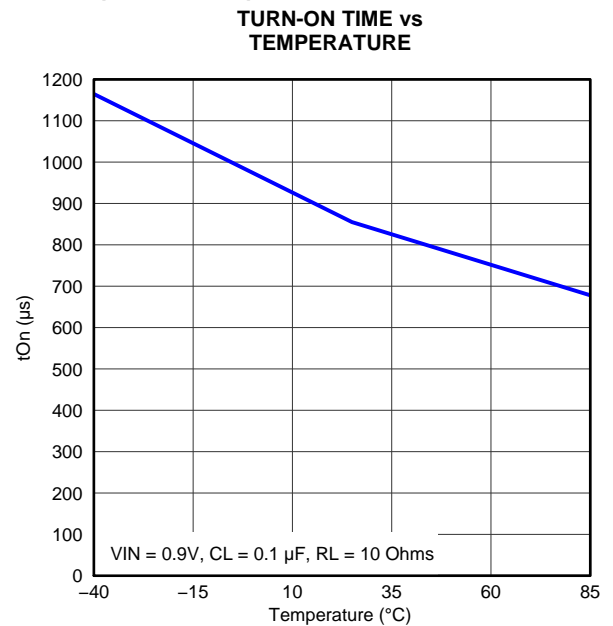


Figure 13.

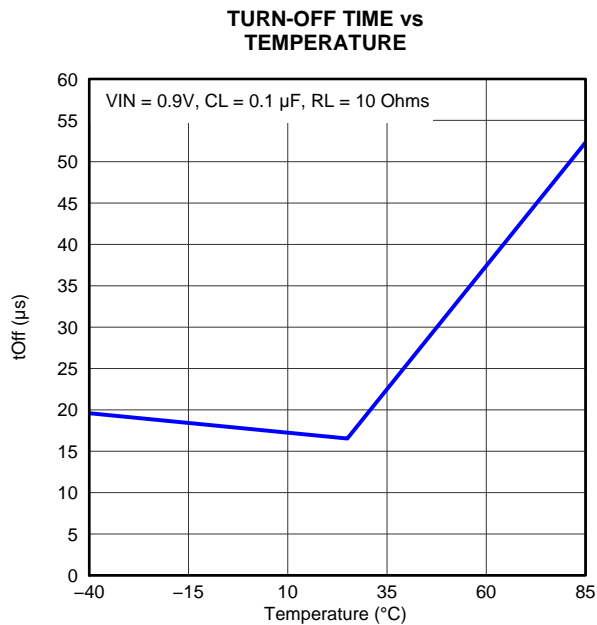


Figure 14.

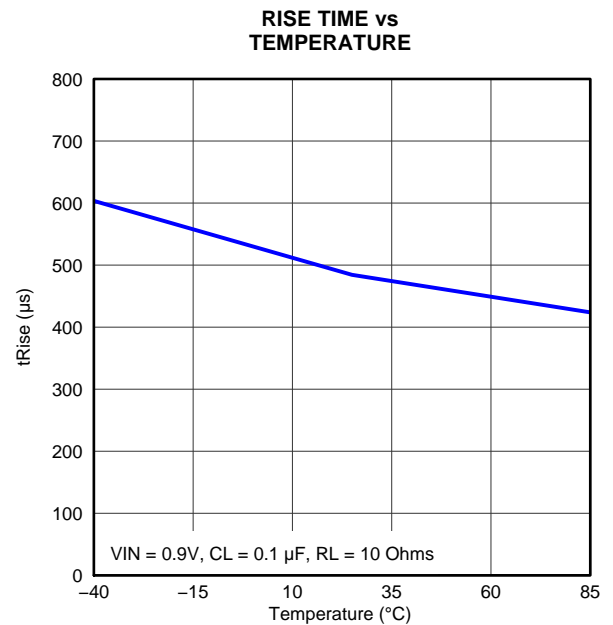


Figure 15.

TYPICAL CHARACTERISTICS (continued)

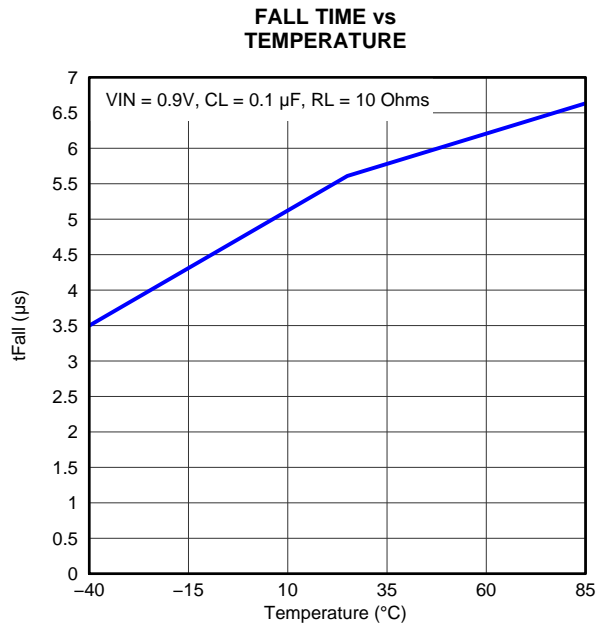


Figure 16.

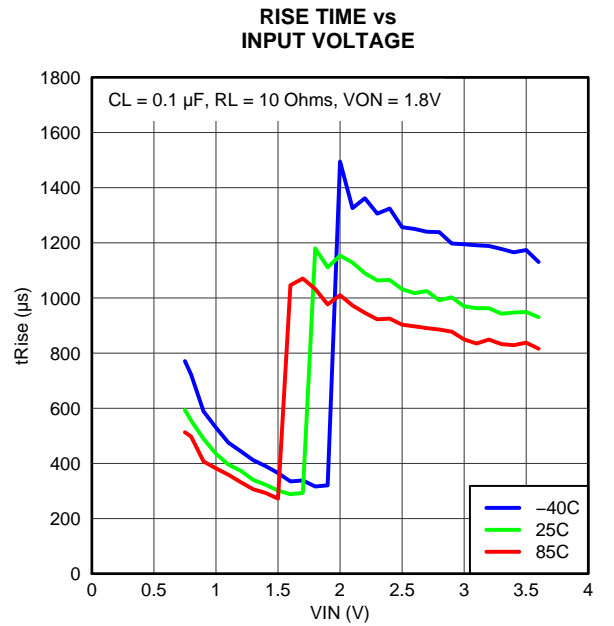


Figure 17.

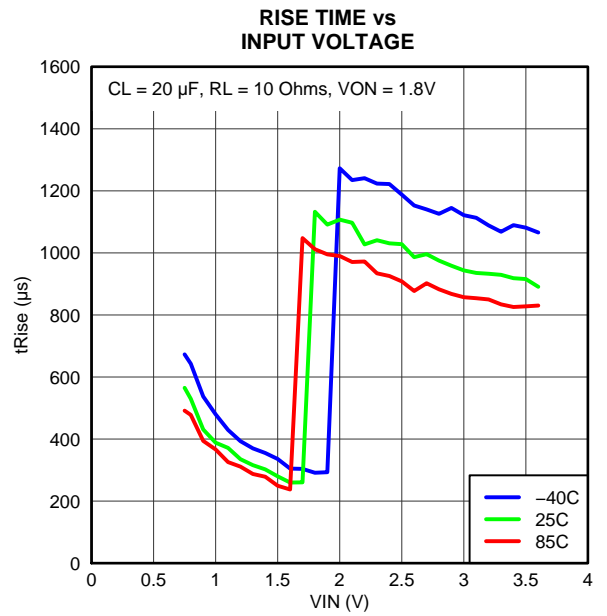


Figure 18.

TYPICAL CHARACTERISTICS (continued)

TURN-ON RESPONSE

$V_{IN} = 0.9V$, $T_A = 25^\circ C$, $C_{IN} = 1\mu F$, $C_L = 0.1\mu F$, $R_L = 10\Omega$

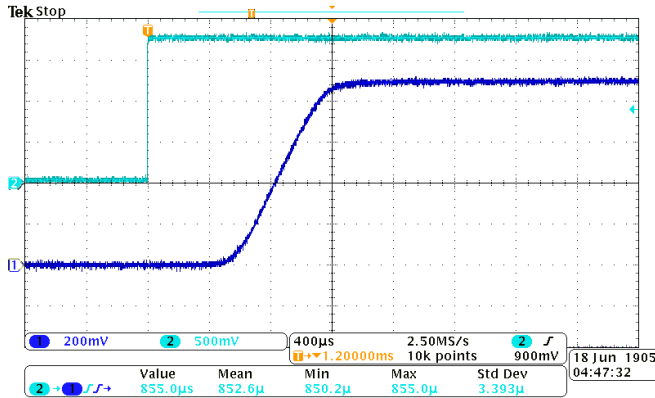


Figure 19.

TURN-OFF RESPONSE

$V_{IN} = 0.9V$, $T_A = 25^\circ C$, $C_{IN} = 1\mu F$, $C_L = 0.1\mu F$, $R_L = 10\Omega$

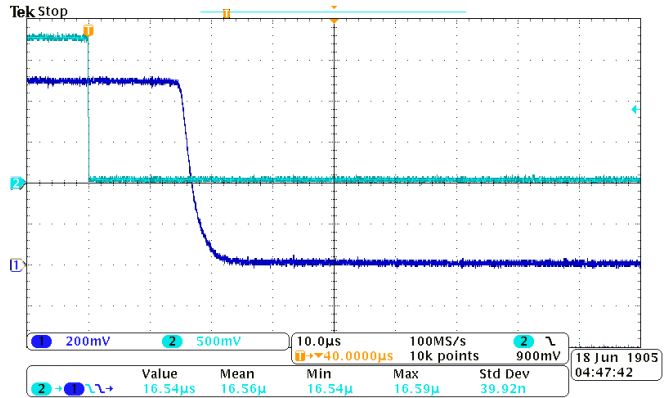


Figure 20.

TURN-ON RESPONSE

$V_{IN} = 0.9V$, $T_A = 25^\circ C$, $C_{IN} = 47\mu F$, $C_L = 20\mu F$, $R_L = 10\Omega$

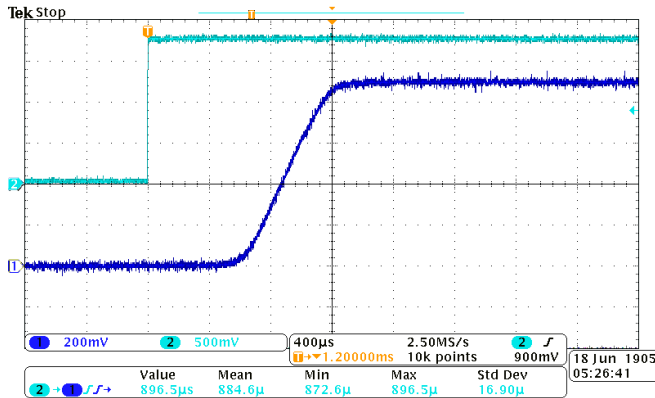


Figure 21.

TURN-OFF RESPONSE

$V_{IN} = 0.9V$, $T_A = 25^\circ C$, $C_{IN} = 47\mu F$, $C_L = 20\mu F$, $R_L = 10\Omega$

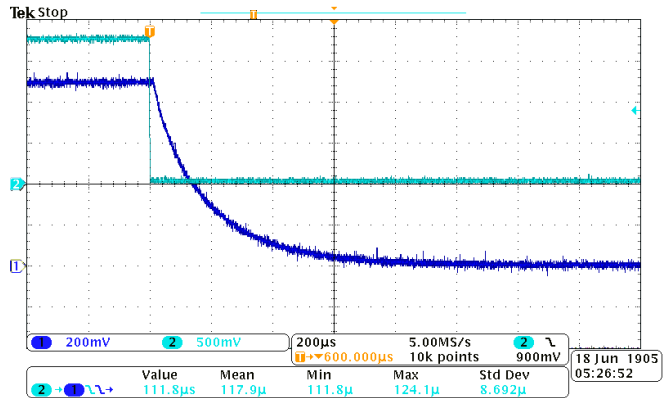


Figure 22.

TURN-ON RESPONSE

$V_{IN} = 3.6V$, $T_A = 25^\circ C$, $C_{IN} = 1\mu F$, $C_L = 0.1\mu F$, $R_L = 10\Omega$

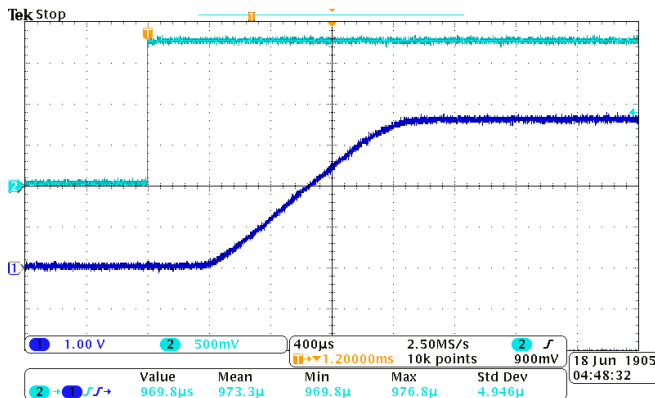


Figure 23.

TURN-OFF RESPONSE

$V_{IN} = 3.6V$, $T_A = 25^\circ C$, $C_{IN} = 1\mu F$, $C_L = 0.1\mu F$, $R_L = 10\Omega$

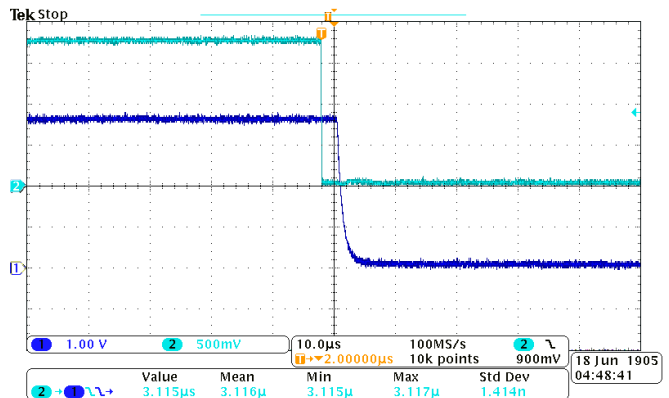


Figure 24.

TYPICAL CHARACTERISTICS (continued)

TURN-ON RESPONSE

$V_{IN} = 3.6V$, $T_A = 25^\circ C$, $C_{IN} = 47\mu F$, $C_L = 20\mu F$, $R_L = 10\Omega$

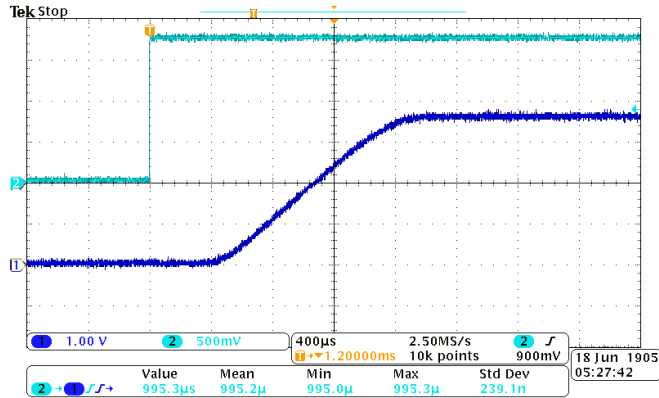


Figure 25.

TURN-OFF RESPONSE

$V_{IN} = 3.6V$, $T_A = 25^\circ C$, $C_{IN} = 47\mu F$, $C_L = 20\mu F$, $R_L = 10\Omega$

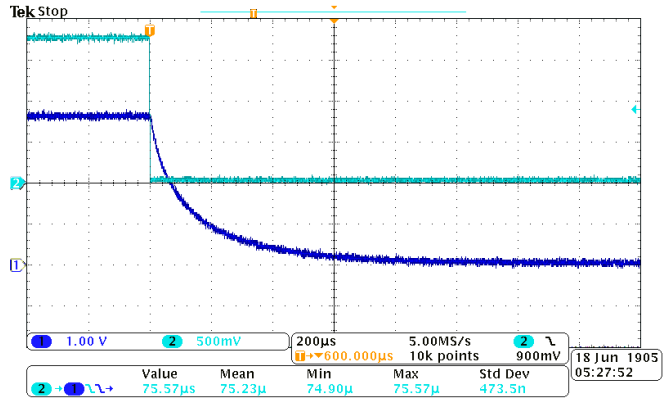


Figure 26.

APPLICATION INFORMATION

ON/OFF CONTROL

The ON pin controls the state of the switch. Asserting ON high enables the switch. ON is active high and has a low threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic threshold. It can be used with any microcontroller with 1.2-V, 1.8-V, 2.5-V or 3.3-V GPIOs.

INPUT CAPACITOR

To limit the voltage drop on the input supply caused by transient inrush currents when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between V_{IN} and GND. A 1- μ F ceramic capacitor, C_{IN} , placed close to the pins is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop.

OUTPUT CAPACITOR

Due to the integral body diode in the NMOS switch, a C_{IN} greater than C_L is highly recommended. A C_L greater than C_{IN} can cause V_{OUT} to exceed V_{IN} when the system supply is removed. This could result in current flow through the body diode from V_{OUT} to V_{IN} . A C_{IN} to C_L ratio of 10 to 1 is recommended for minimizing V_{IN} dip caused by inrush currents during startup.

OUTPUT PULL-DOWN


The output pulldown is active when the user is turning off the main pass FET. The pulldown discharges the output rail to approximately 10% of the rail, and then the output pulldown is automatically disconnected to optimize the shutdown current.

BOARD LAYOUT

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for V_{IN} , V_{OUT} , and GND helps minimize the parasitic electrical effects along with minimizing the case to ambient thermal impedance.

YZP (R-XBGA-N8)

DIE-SIZE BALL GRID ARRAY

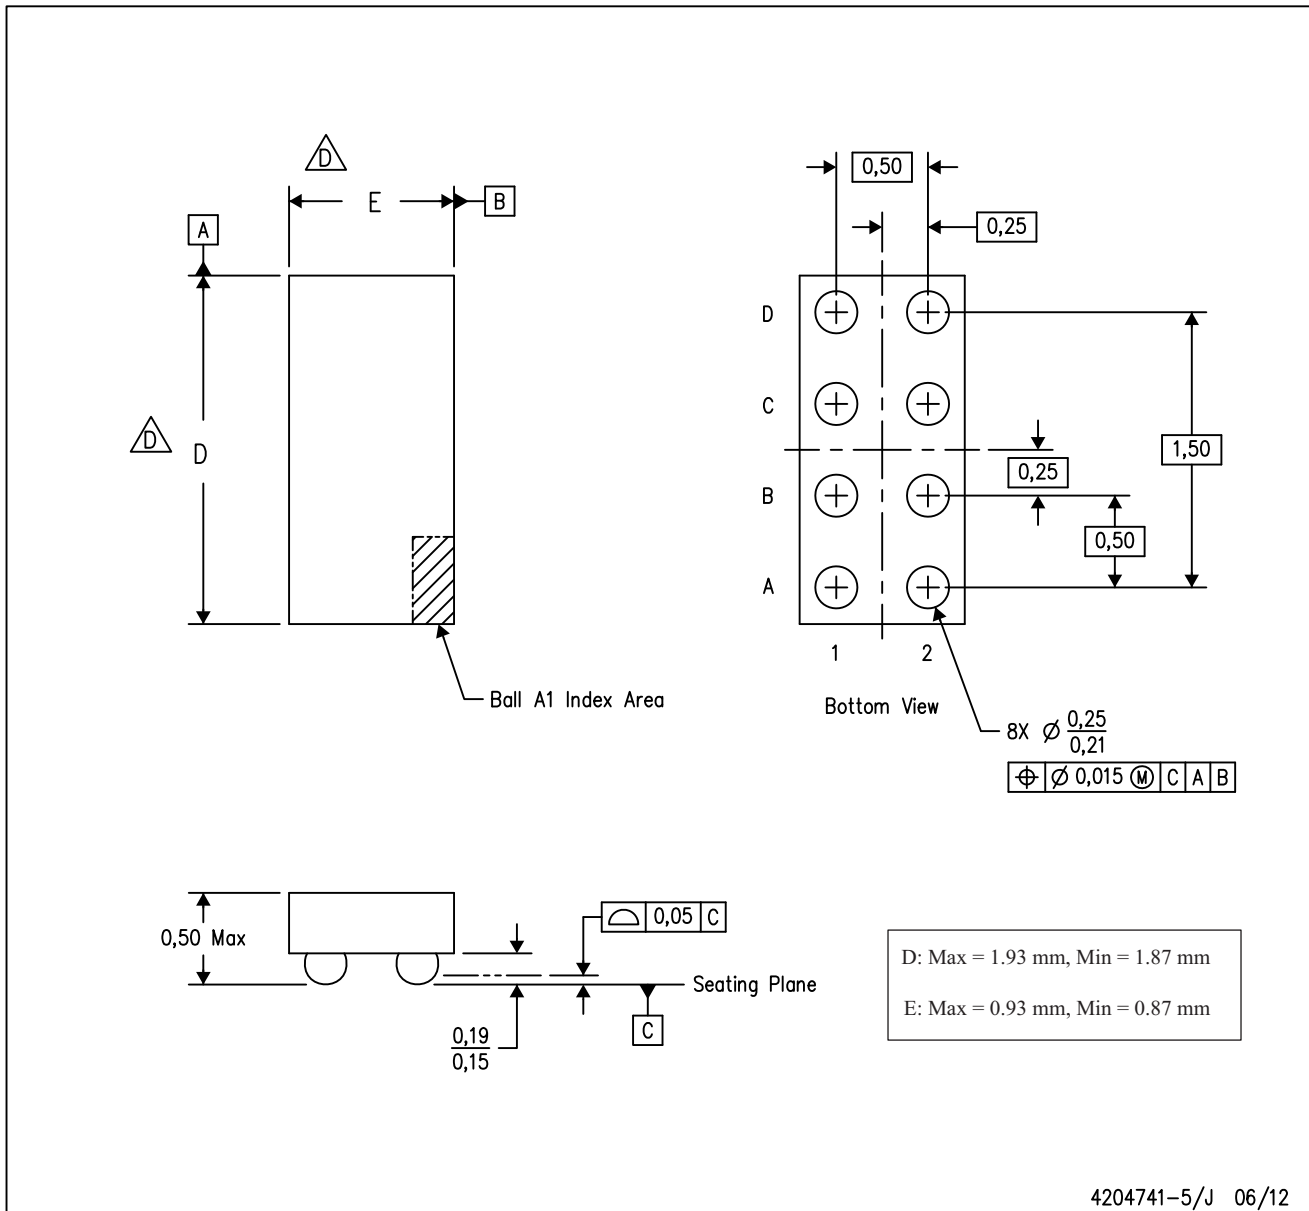

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. NanoFree™ package configuration.
 - \triangle The package size (Dimension D and E) of a particular device is specified in the device Product Data Sheet version of this drawing, in case it cannot be found in the product data sheet please contact a local TI representative.
 - E. This package is a Pb-free solder ball design. Refer to the 8 YEP package (drawing 4204725) for tin-lead (SnPb).

NanoFree is a trademark of Texas Instruments.

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/ Ball Finish	MSL Peak Temp ⁽³⁾	Samples (Requires Login)
TPS22920YZPR	ACTIVE	DSBGA	YZP	8	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	
TPS22920YZPT	ACTIVE	DSBGA	YZP	8	250	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.


Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

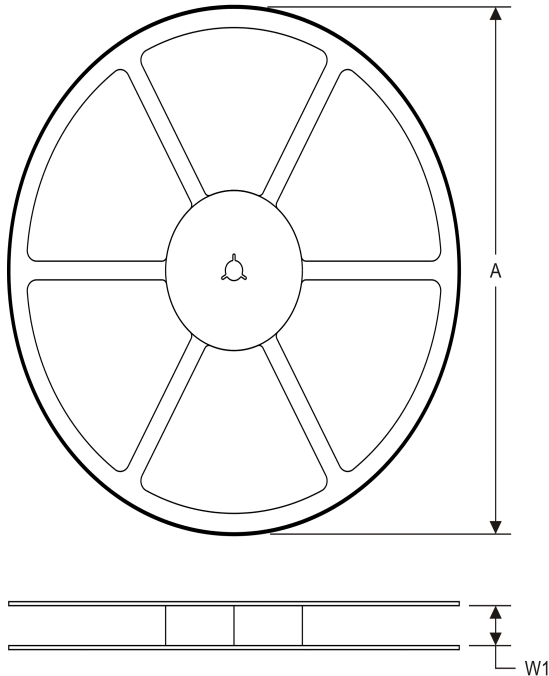TAPE AND REEL INFORMATION
REEL DIMENSIONS

TAPE DIMENSIONS


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

TAPE AND REEL INFORMATION

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22920YZPR	DSBGA	YZP	8	3000	180.0	8.4	1.02	2.02	0.63	4.0	8.0	Q1
TPS22920YZPT	DSBGA	YZP	8	250	180.0	8.4	1.02	2.02	0.63	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22920YZPR	DSBGA	YZP	8	3000	210.0	185.0	35.0
TPS22920YZPT	DSBGA	YZP	8	250	210.0	185.0	35.0

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated