

LM3080

LM3080 Operational Transconductance Amplifier



Literature Number: SNOSBQ5A

LM3080 Operational Transconductance Amplifier

General Description

The LM3080 is a programmable transconductance block intended to fulfill a wide variety of variable gain applications. The LM3080 has differential inputs and high impedance push-pull outputs. The device has high input impedance and its transconductance (g_m) is directly proportional to the amplifier bias current (I_{ABC}).


High slew rate together with programmable gain make the LM3080 an ideal choice for variable gain applications such as sample and hold, multiplexing, filtering, and multiplying.

The LM3080N and LM3080AN are guaranteed from 0°C to +70°C.

Features


- Slew rate (unity gain compensated): 50 V/ μ s
- Fully adjustable gain: 0 to $g_m \cdot R_L$ limit
- Extended g_m linearity: 3 decades
- Flexible supply voltage range: $\pm 2V$ to $\pm 18V$
- Adjustable power consumption

Schematic and Connection Diagrams

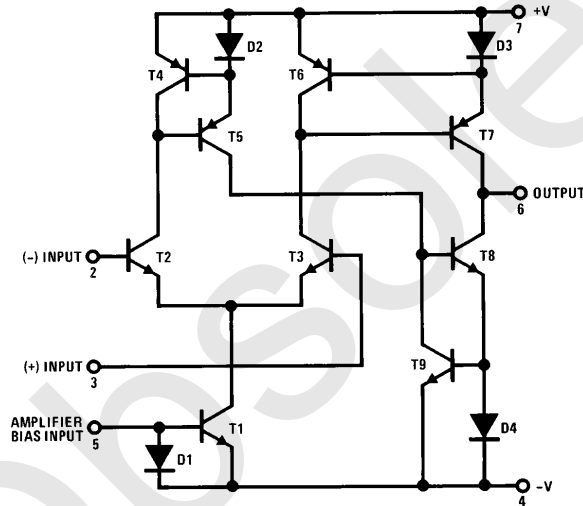

TL/H/7148-1

Dual-In-Line Package

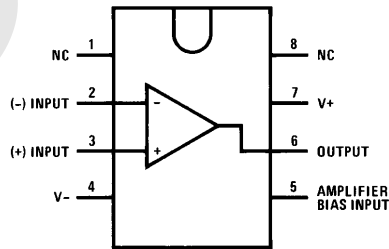

TL/H/7148-2

Order Number LM3080AN, LM3080M or LM3080N
See NS Package Number M08A or N08E

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (Note 2)

LM3080 $\pm 18V$
LM3080A $\pm 22V$

Power Dissipation 250 mW

Differential Input Voltage $\pm 5V$

Amplifier Bias Current (I_{ABC})

2 mA

DC Input Voltage

$+V_S$ to $-V_S$

Output Short Circuit Duration

Indefinite

Operating Temperature Range

LM3080N or LM3080AN $0^\circ C$ to $+70^\circ C$

Storage Temperature Range

$-65^\circ C$ to $+150^\circ C$

Lead Temperature (Soldering, 10 sec.)

$260^\circ C$













Electrical Characteristics (Note 1)

| Parameter | Conditions | LM3080 | | | LM3080A | | | Units |
|------------------------------------|--|----------|----------|-------|----------|----------|-------|------------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Input Offset Voltage | Over Specified Temperature Range $I_{ABC} = 5 \mu A$ | | 0.4 | 5 | | 0.4 | 2 | mV |
| | | | | 6 | | | 5 | mV |
| | | | 0.3 | | | 0.3 | 2 | mV |
| Input Offset Voltage Change | $5 \mu A \leq I_{ABC} \leq 500 \mu A$ | | 0.1 | | 0.1 | 3 | mV | |
| Input Offset Current | | | 0.1 | 0.6 | | 0.1 | 0.6 | μA |
| Input Bias Current | Over Specified Temperature Range | | 0.4 | 5 | | 0.4 | 5 | μA |
| | | | 1 | 7 | | 1 | 8 | μA |
| Forward Transconductance (g_m) | Over Specified Temperature Range | 6700 | 9600 | 13000 | 7700 | 9600 | 12000 | μmho |
| | | 5400 | | | 4000 | | | μmho |
| Peak Output Current | $R_L = 0, I_{ABC} = 5 \mu A$ | | 5 | | 3 | 5 | 7 | μA |
| | $R_L = 0$ | 350 | 500 | 650 | 350 | 500 | 650 | μA |
| | $R_L = 0$ Over Specified Temperature Range | 300 | | | 300 | | | μA |
| Peak Output Voltage | $R_L = \infty, 5 \mu A \leq I_{ABC} \leq 500 \mu A$ $R_L = \infty, 5 \mu A \leq I_{ABC} \leq 500 \mu A$ | +12 | +14.2 | | +12 | +14.2 | | V |
| | | -12 | -14.4 | | -12 | -14.4 | | V |
| Amplifier Supply Current | | | 1.1 | | | 1.1 | | mA |
| Input Offset Voltage Sensitivity | $\Delta V_{OFFSET}/\Delta V +$ $\Delta V_{OFFSET}/\Delta V -$ | | 20 | 150 | | 20 | 150 | $\mu V/V$ |
| | | | 20 | 150 | | 20 | 150 | $\mu V/V$ |
| Common Mode Rejection Ratio | | 80 | 110 | | 80 | 110 | | dB |
| Common Mode Range | | ± 12 | ± 14 | | ± 12 | ± 14 | | V |
| Input Resistance | | 10 | 26 | | 10 | 26 | | k Ω |
| Magnitude of Leakage Current | $I_{ABC} = 0$ | | 0.2 | 100 | | 0.2 | 5 | nA |
| Differential Input Current | $I_{ABC} = 0, \text{Input} = \pm 4V$ | | 0.02 | 100 | | 0.02 | 5 | nA |
| Open Loop Bandwidth | | | 2 | | | 2 | | MHz |
| Slew Rate | Unity Gain Compensated | | 50 | | | 50 | | V/ μs |

Note 1: These specifications apply for $V_S = \pm 15V$ and $T_A = 25^\circ C$, amplifier bias current (I_{ABC}) = 500 μA , unless otherwise specified.

Note 2: Selection to supply voltage above $\pm 22V$, contact the factory.


Typical Performance Characteristics

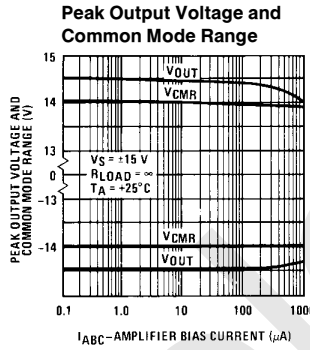

TL/H/7148-3


Typical Performance Characteristics (Continued)

Input and Output Capacitance




TL/H/7148-4

Output Resistance




TL/H/7148-5

Leakage Current Test Circuit

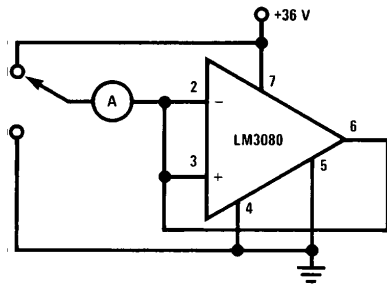


TL/H/7148-6

Unity Gain Follower

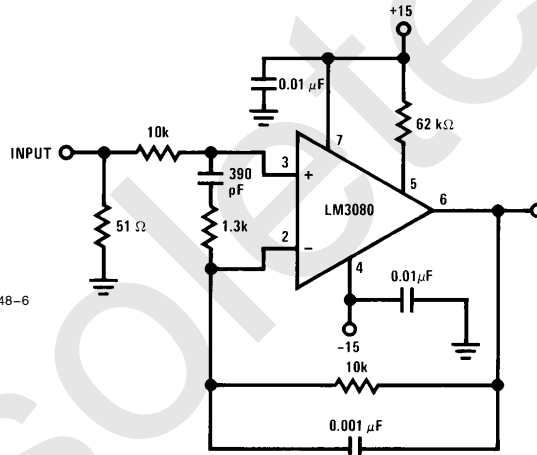




TL/H/7148-8

Differential Input Current Test Circuit

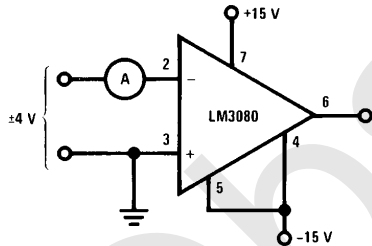


TL/H/7148-7

Physical Dimensions inches (millimeters)

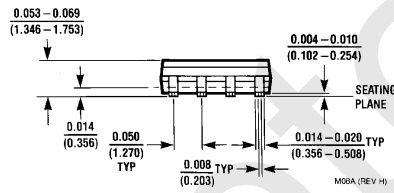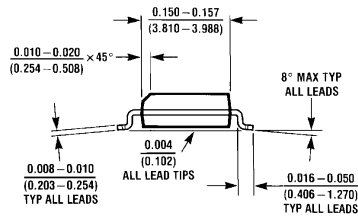

Molded Package SO (M)
Order Number LM3080M
NS Package Number M08A

Physical Dimensions inches (millimeters) (Continued)

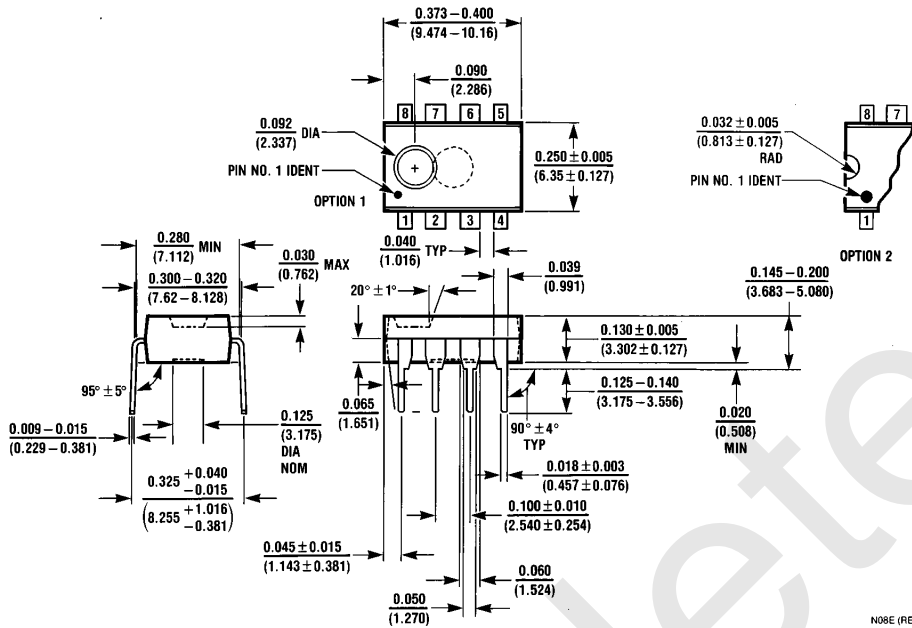

Molded Dual-In-Line Package (N)
Order Number LM3080AN or LM3080N
NS Package Number N08E

N08E (REV F)

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: 1(800) 272-9959
 Fax: 1(800) 737-7018

National Semiconductor Europe
 Fax: (+49) 0-180-530 85 86
 Email: cnjwge@tevm2.nsc.com
 Deutsch Tel: (+49) 0-180-530 85 85
 English Tel: (+49) 0-180-532 78 32
 Français Tel: (+49) 0-180-532 93 58
 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
 13th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
 Tel: 81-043-299-2309
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Mobile Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Transportation and Automotive | www.ti.com/automotive |
| Video and Imaging | www.ti.com/video |

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated